
WAY4TECH SOLUTIONS

Live demo
restaurant.way4tech.com
w4demo / Demo2026 · Odoo 19, Community

COMPLETE GUIDE · SETUP, SERVICE, THE KITCHEN AND EVERY SCREEN

Restaurant Management, Cloud Kitchen and QR Table for Odoo 19

One back office for a cafe, a dark kitchen or a group of outlets: orders of every type, kitchen stations, riders, tables and bookings, recipes and food cost, wastage, bills and invoices. Every screen and every step, shown on a live demo. No Odoo background needed.

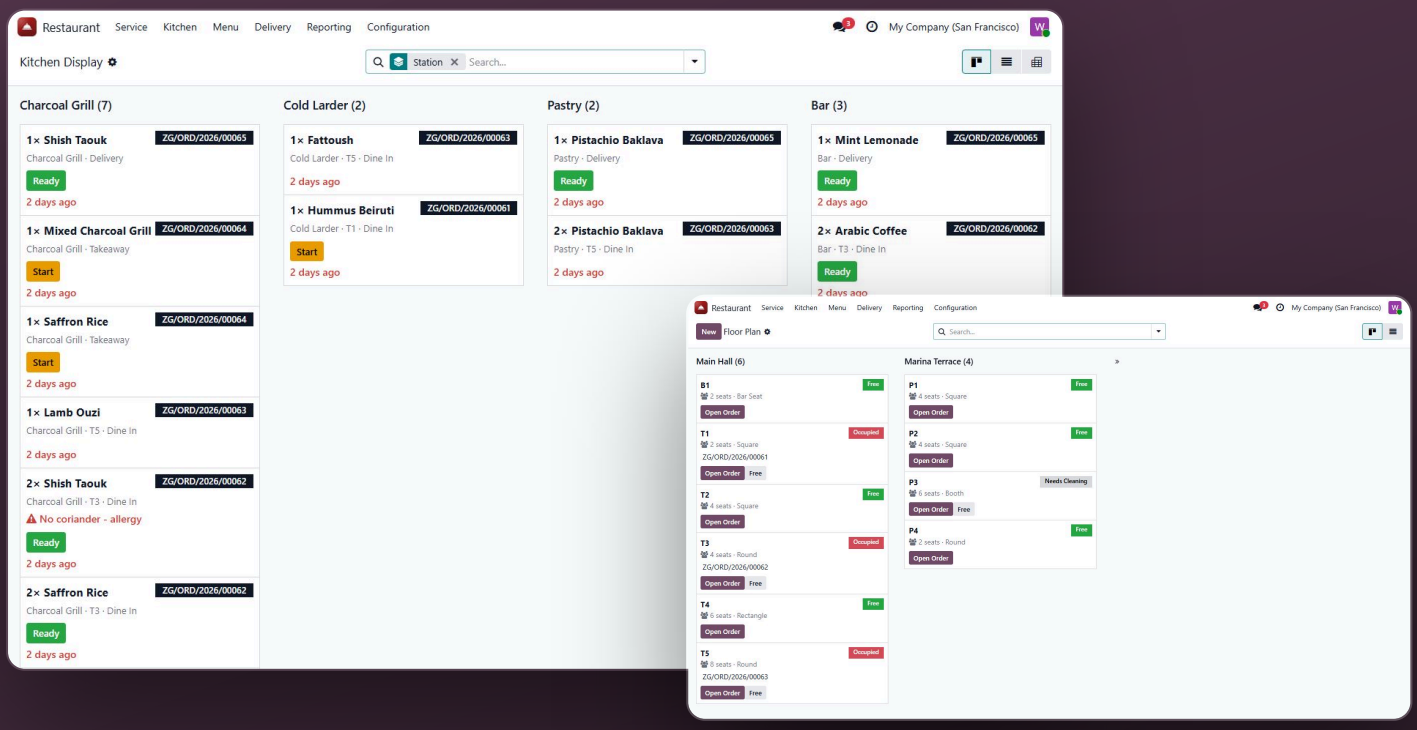

START

About this guide

This module runs the back of house of a food business inside Odoo 19 Community: orders of every kind, the kitchen stations that cook them, riders, tables and bookings, the menu with its recipes and food cost, wastage, and the bill that becomes an invoice. This guide walks every screen on a live demo, in the order a new restaurant would meet them.

Who it is for

The owner or manager setting it up, the host and the floor staff, the kitchen, the riders, and the person in accounts who receives the invoices.

How to read it

Front to back the first time. Each part opens with what you will learn and something short to try on the demo, then walks the screens step by step.

The live demo

Zaytoun Grill, a grill restaurant with a dining hall and a terrace, five kitchen stations, two riders and a month of orders already served and billed, plus a second outlet that is a dark kitchen.

HOW IT WORKS

The demo restaurant

Address	**restaurant.way4tech.com**
Sign in	**w4demo / Demo2026**
Outlets	Zaytoun Grill - Marina (restaurant) · Zaytoun Express - Dark Kitchen (cloud kitchen)
Runs on	Odoo 19, Community edition, with Inventory and Invoicing

The demo is shared and resets from time to time, so anything you change may be put back or seen by the next visitor. Treat it as a restaurant to walk around, not your own books.

Two Way4Tech restaurant products. This guide covers **Restaurant Management** (wt_restaurant_management, USD 299), one back-office app where orders are entered on Odoo forms. It is not the Way4Tech Restaurant Suite (w4_resto_*), which is built on the Odoo Point of Sale with waiter tablets, a kitchen screen app and printers, and has its own guide. Part 1 explains which one fits which business.

What is in the guide

PART 1 What this module is, and who it is for

PART 2 The restaurant at a glance

PART 3 Open the demo and sign in

PART 4 Set the restaurant up from zero

PART 5 Build the menu: dishes, recipes, modifiers and allergens

PART 6 Take an order and move it through service

PART 7 The kitchen display and the stations

PART 8 Takeaway, delivery, aggregators and riders

PART 9 The floor plan, tables and reservations

PART 10 The bill, the service charge and the invoice

PART 11 Ingredients out of stock, and the wastage log

PART 12 Reporting and menu engineering

PART 13 Printed documents

PART 14 A 15-minute demo script

PART 15 Questions people ask, and the limits

PART 16 Menu map

PART 1 What this module is, and who it is for

A restaurant runs on two clocks: the kitchen's, which is about how long food takes, and the money's, which is about what each plate earns. This module keeps both in one Odoo database, without the Point of Sale app and without Enterprise.

IN THIS PART YOU WILL LEARN

- The four order types and why they share one document
- Outlets: a restaurant, a cloud kitchen, a counter or a food truck
- How a dish is a product, a recipe and a station at the same time
- What happens to stock and to accounting when an order moves on
- What the QR table link is today, and what it is not
- When to pick this module and when to pick the Restaurant Suite

One order, four ways in

A grill does not care whether the chicken it is cooking was ordered at table 3, by phone for collection, by a rider's customer, or through an aggregator app. It is the same chicken on the same grill. So the module uses one order document for all four, **Dine In**, **Takeaway**, **Delivery** and **Aggregator**, and changes only which fields are required: a table for dine-in, an address for delivery, the aggregator's own reference for an aggregator order.

The life of an order

1. **Draft** — Dishes being added
2. **Sent to Kitchen** — Lines queue at their stations, stock is consumed
3. **Preparing** — A station has started
4. **Ready** — Every dish is on the pass
5. **Served** — At the table or out with a rider
6. **Billed** — A customer invoice exists
7. **Paid** — Invoice posted, table released

Outlets

An **outlet** is one place that sells food: a dining room, a dark kitchen, a counter or kiosk, or a food truck. Every order, table, station, booking and wastage entry belongs to one. An outlet carries its own order number prefix, service charge, billing journal, fiscal position, kitchen stock location and the fiscal block printed on its bills. A chain runs many outlets in one company, or one outlet per company where each branch has to be its own legal entity.

A dish is three things

A product

Every menu item is backed by an ordinary Odoo product, so invoices, taxes and reports keep working as they always do.

A recipe

Ingredients with a quantity and unit. The module prices the plate from each ingredient's cost and takes the ingredients out of stock when the dish is sent to the kitchen.

A station

Where it is cooked: the grill, the cold larder, the bar. That decides which column of the kitchen display the line lands in.

Stock and money follow the order

Sending an order to the kitchen does more than queue it. If the outlet is set to consume ingredients and has a kitchen stock location, every ingredient of every dish is moved out of that location there and then. Cancel the order and the ingredients go back. When the order is billed, a customer invoice is created in Odoo Accounting with the dishes, the discount, the service charge and the delivery fee as lines. Marking it paid posts that invoice and frees the table.

The QR table link, honestly

Every table carries a **QR Link**: an address of the form `/restaurant/menu?outlet=1&table=3` built from your Odoo address, and each outlet has a **QR Table Ordering** switch. Orders also have a **Table QR** channel so they can be counted apart. What this version does not include is the page itself: there is no guest ordering screen at that address and no QR image is generated. The field help says it plainly, point the link at your own ordering page or your menu PDF. Part 9 shows the link and Part 15 lists it with the other limits.

> If guests must order and pay from their phones today, that is a separate ordering page built for you, or the Restaurant Suite with its online ordering module. Do not plan a launch on the QR link alone.


This module or the Restaurant Suite

	RESTAURANT MANAGEMENT (THIS GUIDE)	RESTAURANT SUITE (W4_RESTO_*)
Built on	Its own Restaurant app. No Point of Sale needed	The Odoo Point of Sale
Orders taken	On an Odoo form by staff, any device with a browser	On the POS till and waiter tablets
Kitchen	A kanban board per station inside Odoo	A dedicated kitchen screen app with printers
Best for	Cloud kitchens, phone and aggregator trade, small dining rooms, groups that want food cost and stock first	Busy dining rooms with tills, cash drawers, split bills and waiter devices
Payments	Customer invoice per order, posted on Mark Paid	POS payment methods, cash control, day close
Price	USD 299, one module	From USD 999 for the full suite, or module by module

A simple rule: if money is taken at a till during service, look at the Suite. If orders arrive by phone, app and rider, and what you need most is a kitchen that knows what to cook and a menu that knows what it costs, this module is the smaller and cheaper fit.

PART 2 The restaurant at a glance

The module adds one app, Restaurant, with six menus. This part is the map and the roles. Every later part is one area in full.

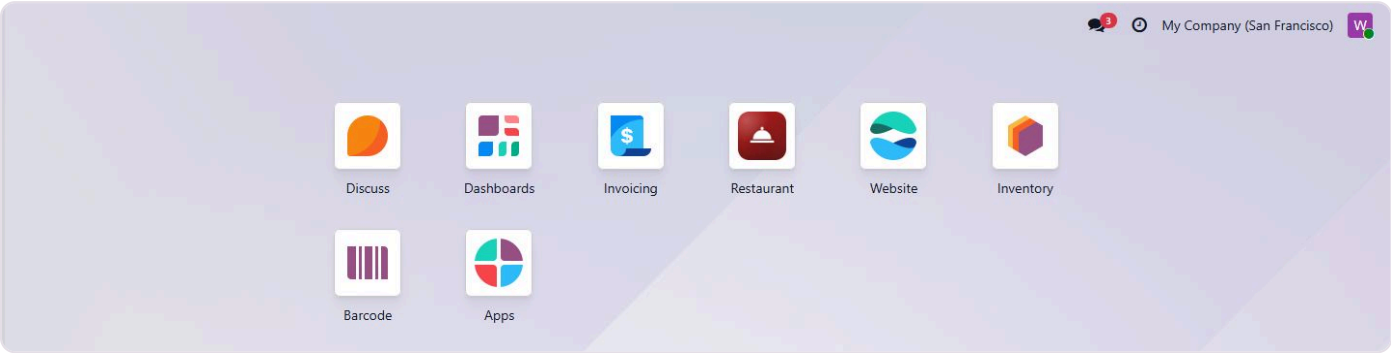

The Restaurant app on the Odoo home screen of the demo, next to the standard apps it works with.

Who sees what

Floor Staff

Take orders, seat guests, bill tables and see the floor plan and reservations. Cannot change the menu or the outlets.

Kitchen

Everything floor staff see, plus the Kitchen menu: the kitchen display and the wastage log.

Delivery Rider

Sees only the deliveries assigned to them and their own rider record, so a rider can have a login without seeing the dining room or the books.

Restaurant Manager

Everything, plus Menu Engineering, Categories, Modifier Groups, Allergens, Reporting and Configuration. Settings itself also needs Odoo's administrator right.

The four rights sit in the user form under **Restaurant**. Kitchen includes Floor Staff, and Manager includes Kitchen. Every operational record is also limited to the companies the user may see, so a group with a company per branch does not mix covers on a pivot table.

The six menus

Service

Orders	Every dine-in, takeaway, delivery and aggregator order. Opens on the open ones
Floor Plan	Tables by floor, coloured free, reserved, occupied or needs cleaning
Reservations	Table bookings in a calendar, with no-show release

Kitchen

Kitchen Display	Every dish still cooking, in one column per station
Wastage	Spoiled, dropped or remade food, priced and scrapped from stock

Menu

Menu Items	Dishes with price, recipe, cost, station, diet and allergens
Menu Engineering	Stars, plough horses, puzzles and dogs (manager)
Categories	Menu sections, each tied to a course (manager)
Modifier Groups	Cooking choices and paid extras with min and max (manager)
Allergens	The fourteen declarable allergens, with short codes (manager)

Delivery

Riders	Riders, their vehicle, status, deliveries today and on-time rate

Reporting

Sales	Billed and paid orders by outlet, type, channel, waiter, date (manager)
Dishes	Billed and paid dishes by category, station or course (manager)

Configuration

Settings	Service charge, bill when served, no-show grace, food cost target
Outlets	Restaurants, cloud kitchens, counters and trucks, with billing and stock
Floors	Dining areas per outlet, with seat counts
Kitchen Stations	Where each dish is cooked, plus the pass

Behind the scenes

Kitchen Ticket and Customer Bill	Two 80 mm reports printed from an order
Email template	"Restaurant: Reservation Confirmed"
Scheduled actions	No-show release every 15 minutes, menu engineering daily
Sequences	Orders ORD/, bookings RES/, wastage WST/


> The demo login can see the whole app so you can follow every part of this guide. In a real restaurant a cook would see Service and Kitchen, and a rider only their own deliveries.

PART 3 Open the demo and sign in

Everything in this guide can be followed on the live demo. It is a real Odoo 19 database with the module installed and a month of service already run through it.

TRY IT YOURSELF ON THE DEMO

1. Open restaurant.way4tech.com in any browser
2. Sign in with w4demo and Demo2026
3. Click Restaurant on the home screen, then Service, then Orders
4. You are looking at the open orders of today's service



1

Go to the restaurant

Open **restaurant.way4tech.com**. The sign-in screen is the standard Odoo one. There is nothing to install.

It works on a computer, a tablet or a phone. The order and kitchen screens are easiest on a tablet or larger.

2

Sign in

User `w4demo`, password `Demo2026`. This login sees the whole app, which is not how you would set up a cook or a rider.

The demo is shared. Anything you change may be put back or seen by the next visitor.

3

Find the app

The **Restaurant** app sits on the home screen. Inside it the top bar shows Service, Kitchen, Menu, Delivery, Reporting and Configuration.

PART 4 Set the restaurant up from zero

This is what a new restaurant does once, before the first order: install the app, set four company rules, create the outlet, its floors and tables, and the kitchen stations. On the demo it is already done, so read each screen to understand what the fields do.

IN THIS PART YOU WILL LEARN

- What the module installs with it and what it needs from Accounting
- The four settings and a sensible starting value for each
- An outlet's three tabs: billing, kitchen and stock, floors and tables
- Floors, tables and seats, and why table names are unique per floor
- Kitchen stations and the pass

TRY IT YOURSELF ON THE DEMO

1. Configuration, Outlets, open Zaytoun Grill - Marina
2. Click through the Billing, Kitchen & Stock and Floors & Tables tabs
3. Configuration, Kitchen Stations: five stations, the Pass is the expediting one

Install the app

The module is **Restaurant Management**, technical name `wt_restaurant_management`. It depends on Discuss, Products, Inventory, Invoicing and Units of Measure, which Odoo installs with it. It does not need the Point of Sale app or the Sales app. After install, the Restaurant app appears on the home screen and the administrator is made a Restaurant Manager.

> Before the first bill, the company needs a chart of accounts and sales taxes, as for any Odoo invoice, plus two service products: one for the service charge and one for the delivery fee. The outlet form asks for them, and billing stops with a clear message if an outlet charges a fee but has no product for it.

The four settings

Configuration, Settings opens the Restaurant section of the Odoo settings page, in three blocks: Service, Reservations and Menu Engineering. Only a user with Odoo's administrator right can open it, so the shared demo login gets an access message there; the four settings are listed below instead.

SETTING	WHAT IT DOES	DEFAULT
Default Service Charge	Percentage given to each new outlet. Each outlet can change it. Only dine-in bills carry it.	0%
Bill When Served	Create the customer invoice the moment an order is served, instead of waiting for the guest to ask. Good at a counter, wrong in a dining room.	Off
No-show Grace Period	How long past the booked time a table is held before the booking is released as a no-show.	30 minutes
Target Food Cost	Dishes whose recipe costs more than this share of the menu price are flagged on the menu.	33%

Create the outlet

1 Open Configuration, Outlets


The list shows each outlet with its code and type. Filters split restaurants from cloud kitchens, and archived outlets can be shown.



2 Name, code and type

Give the outlet a name and a short **Code**. The code is printed in front of every order number, so Zaytoun Grill's orders read ZG/ORD/2026/00062. Choose the **Type**: Restaurant, Cloud Kitchen, Counter / Kiosk or Food Truck. Add the address contact, phone, email and opening and closing hours. The two buttons at the top count the open orders and the tables.


A code can be used once per company. Two outlets in one company cannot share ZG.

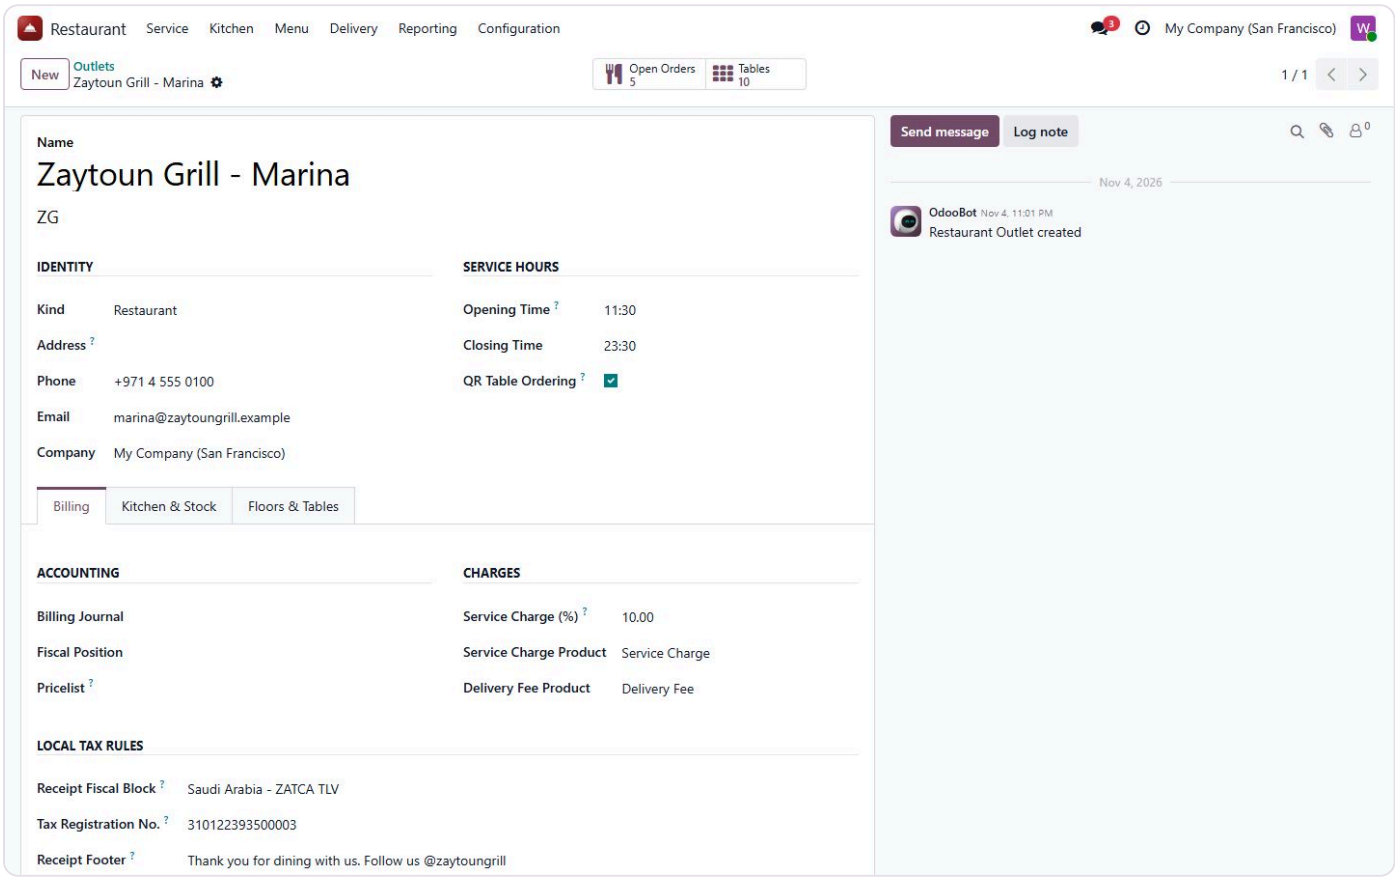

3 Billing tab

Pricelist if the outlet sells at different prices, the **Billing Journal** its invoices go to, a **Fiscal Position** if its taxes differ, the **Service Charge (%)** and the two products for service charge and delivery fee. Below that is the receipt: the **Receipt Fiscal Block** (None, Saudi Arabia ZATCA, India GSTIN, EU VAT), the **Tax Registration No.** and the footer text.


The service charge must be between 0 and 100. A pricelist is stored on the outlet for your own use; orders are priced from the menu price.

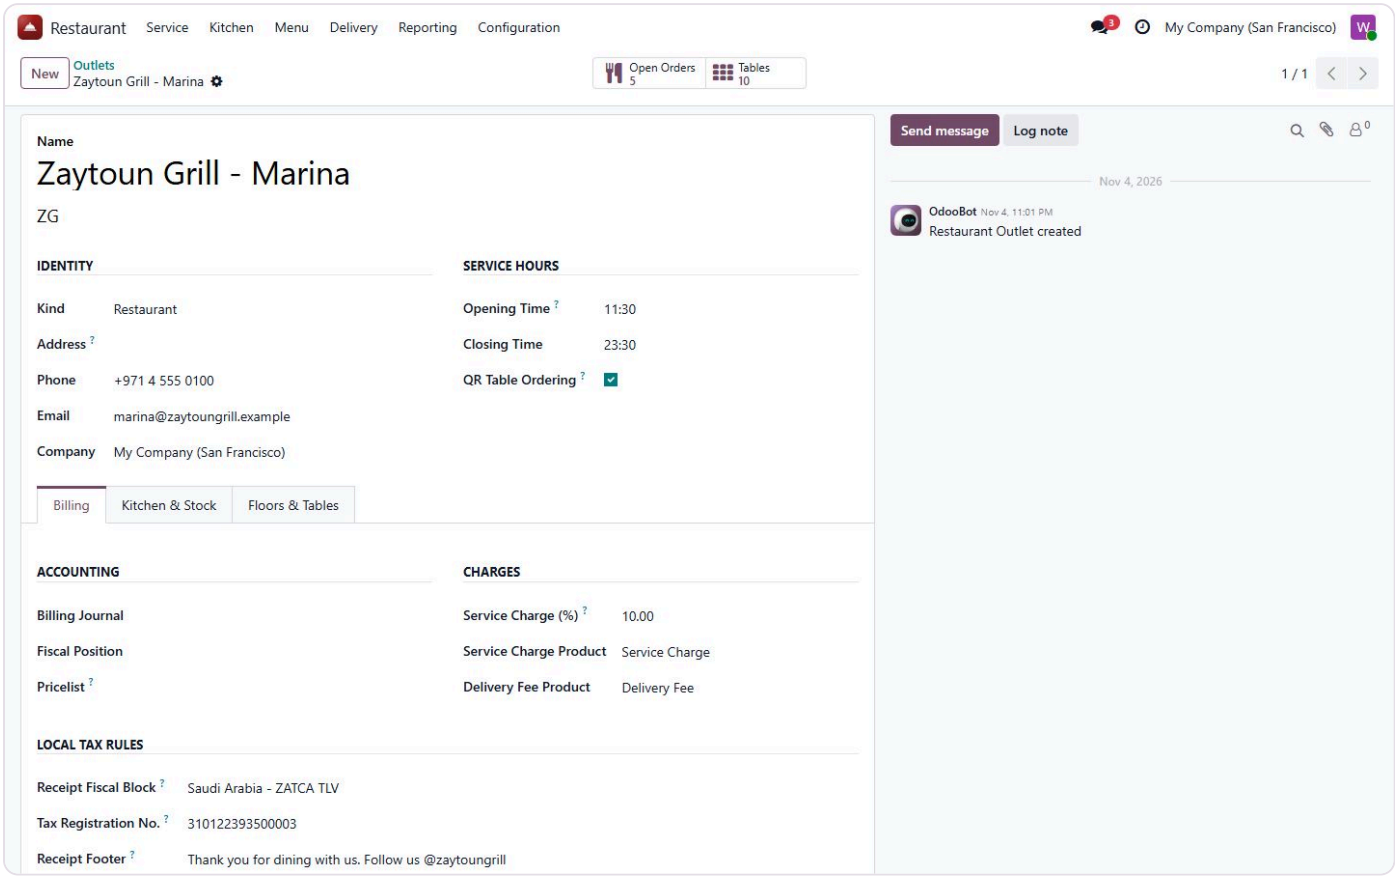

4 Kitchen & Stock tab


QR Table Ordering switches the table QR link on for this outlet. **Consume Ingredients** takes the recipe out of stock when an order is sent to the kitchen, from the **Kitchen Stock Location** chosen here. The list below shows the outlet's kitchen stations.

With Consume Ingredients on but no location set, nothing is consumed and nothing complains. Set the location if you want the stock to move.

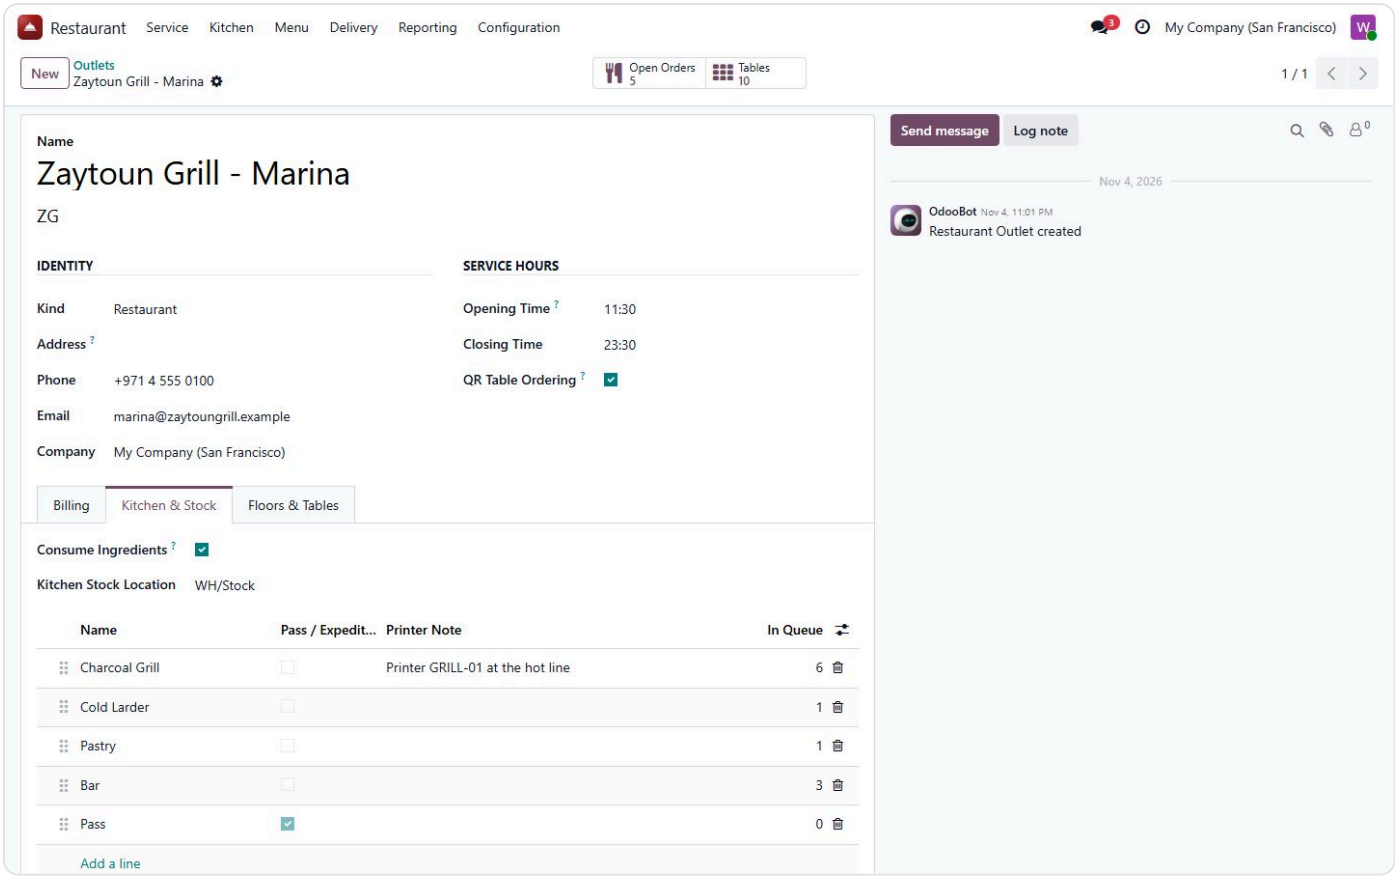


5 Floors & Tables tab

The outlet's floors and tables in one place. On the demo the Main Hall has six tables and the Marina Terrace four.

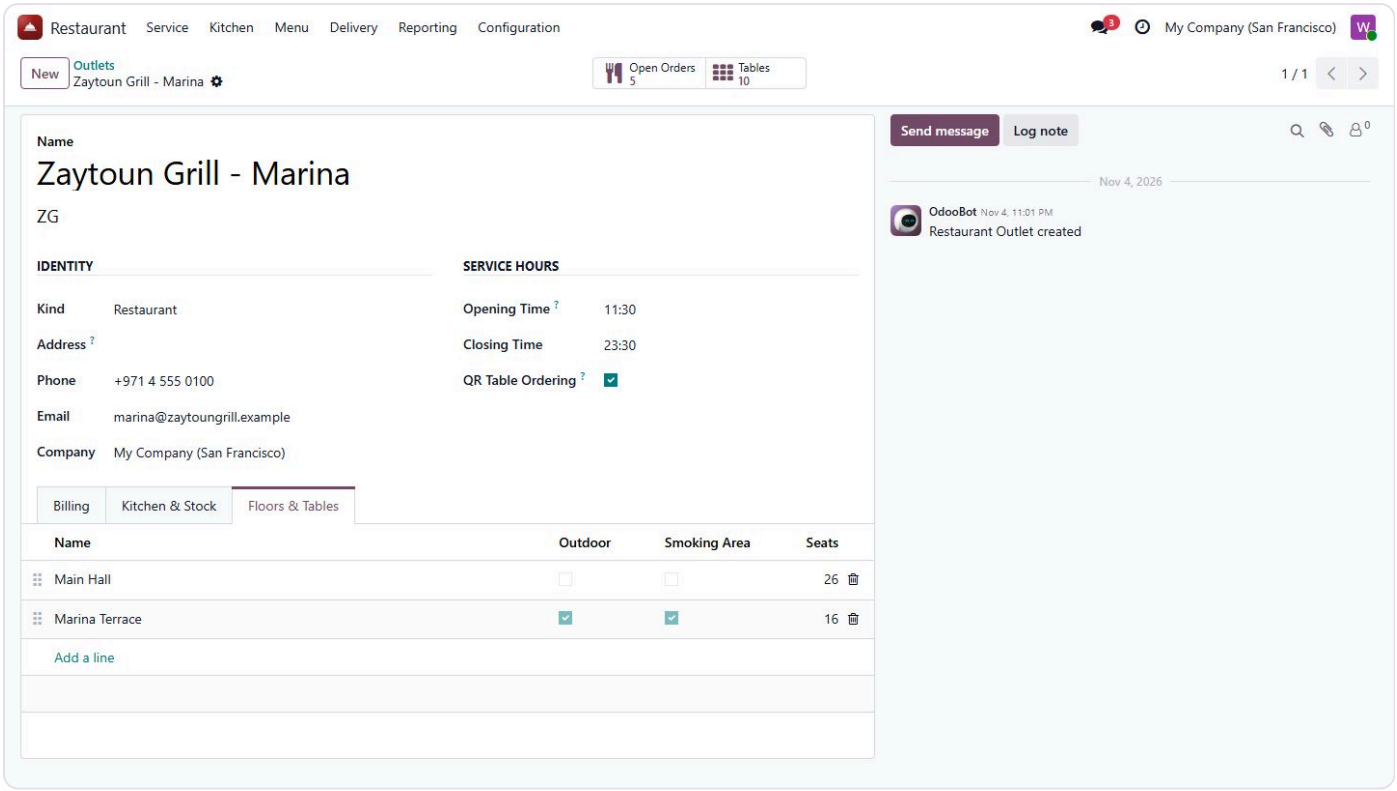

6 A cloud kitchen outlet


Zaytoun Express is a **Cloud Kitchen**: no floors, no tables, no service charge. It takes takeaway, delivery and aggregator orders only, and has its own code ZX so its orders number separately.

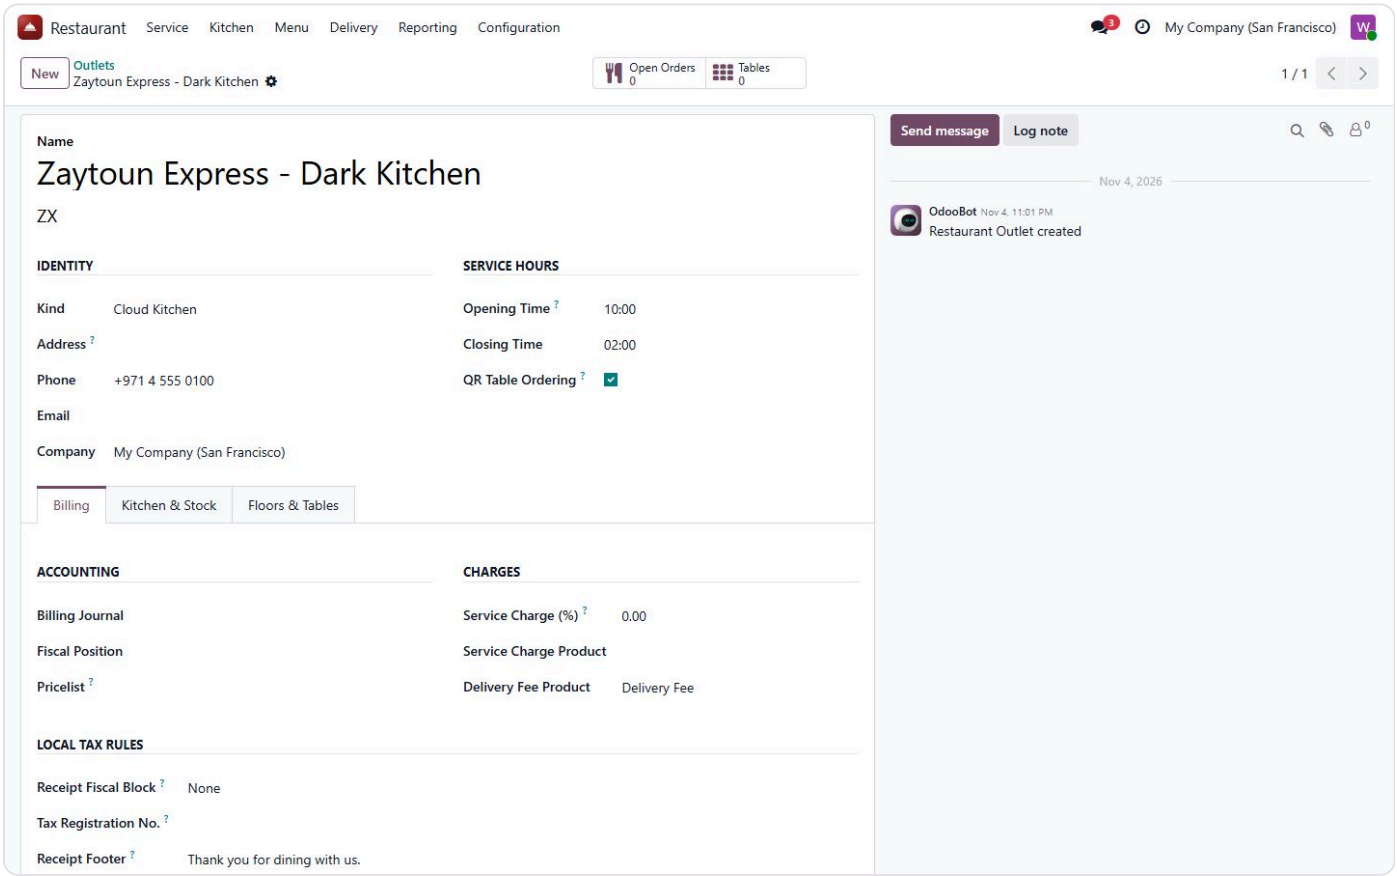

Floors and tables

7 Configuration, Floors

A floor is a dining area of one outlet: the hall, the terrace, a private room. Each can be marked as a smoking area or outdoor, and shows how many seats its tables add up to.

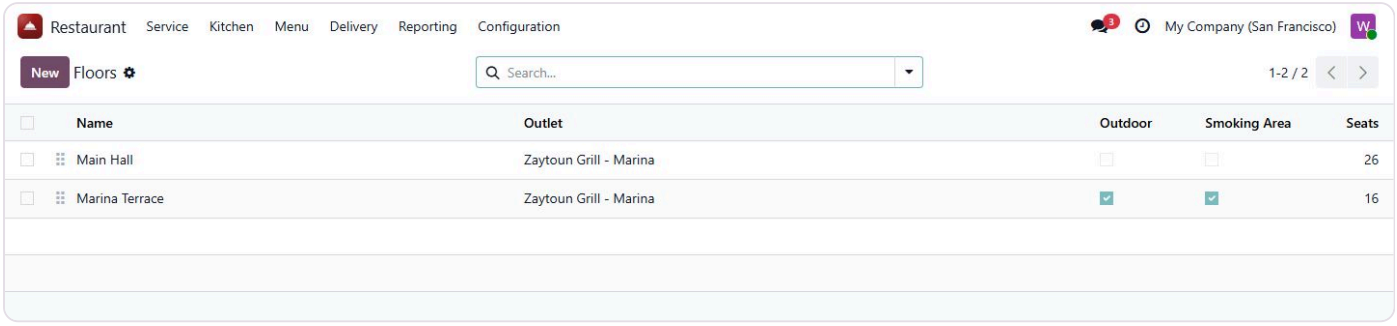

Name	Outlet	Outdoor	Smoking Area	Seats
Main Hall	Zaytoun Grill - Marina			26
Marina Terrace	Zaytoun Grill - Marina	☑	☑	16

8 Tables

Tables are created from the floor plan (Service, Floor Plan) or the outlet. Each table has a name, a floor, a number of seats and a shape: Square, Round, Rectangle, Booth or Bar Seat. The list colours them by status.

Two tables on the same floor cannot share a name, and a table needs at least one seat. T1 can exist on the hall and on the terrace.

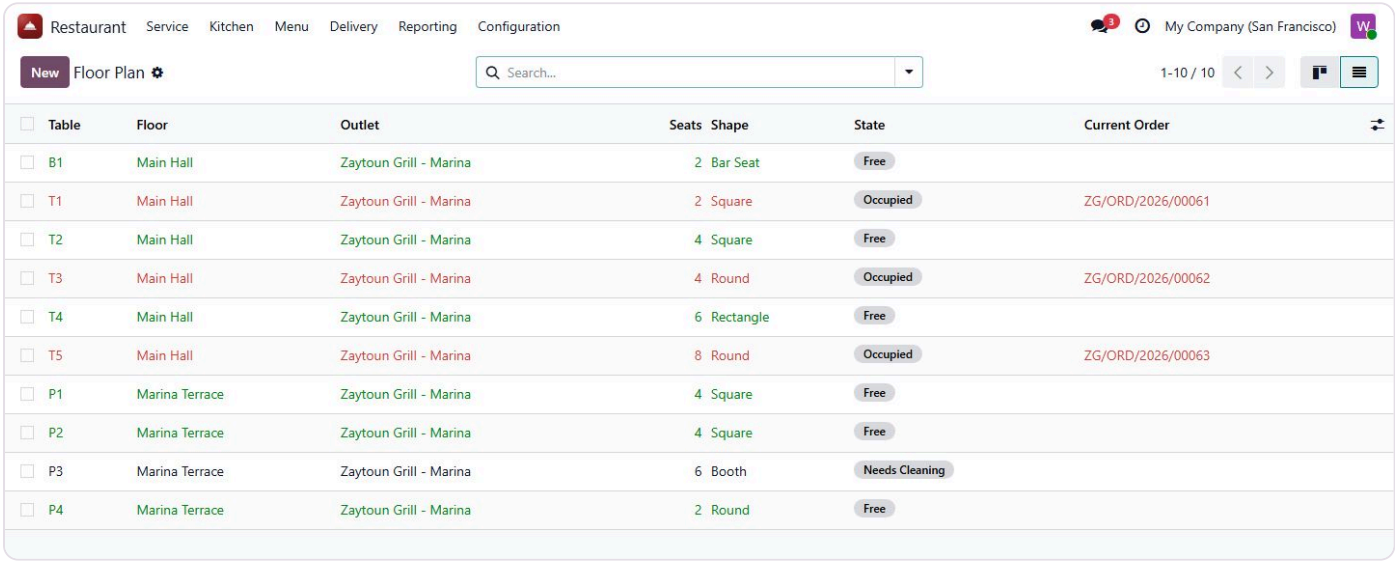



Table	Floor	Outlet	Seats	Shape	State	Current Order
B1	Main Hall	Zaytoun Grill - Marina	2	Bar Seat	Free	
T1	Main Hall	Zaytoun Grill - Marina	2	Square	Occupied	ZG/ORD/2026/00061
T2	Main Hall	Zaytoun Grill - Marina	4	Square	Free	
T3	Main Hall	Zaytoun Grill - Marina	4	Round	Occupied	ZG/ORD/2026/00062
T4	Main Hall	Zaytoun Grill - Marina	6	Rectangle	Free	
T5	Main Hall	Zaytoun Grill - Marina	8	Round	Occupied	ZG/ORD/2026/00063
P1	Marina Terrace	Zaytoun Grill - Marina	4	Square	Free	
P2	Marina Terrace	Zaytoun Grill - Marina	4	Square	Free	
P3	Marina Terrace	Zaytoun Grill - Marina	6	Booth	Needs Cleaning	
P4	Marina Terrace	Zaytoun Grill - Marina	2	Round	Free	

Kitchen stations

9 Configuration, Kitchen Stations

A station is where food is cooked: the charcoal grill, the cold larder, pastry, the bar. Each dish names the station that cooks it, and that is where its line appears on the kitchen display. **Pass / Expediting** marks the station that assembles plates and calls the order ready. **In Queue** counts the lines waiting or cooking right now.

Printer Note is free text for whoever sets up the printer at that station, such as its network name. The module does not send tickets to a printer on its own; the kitchen ticket is a PDF printed from the order.

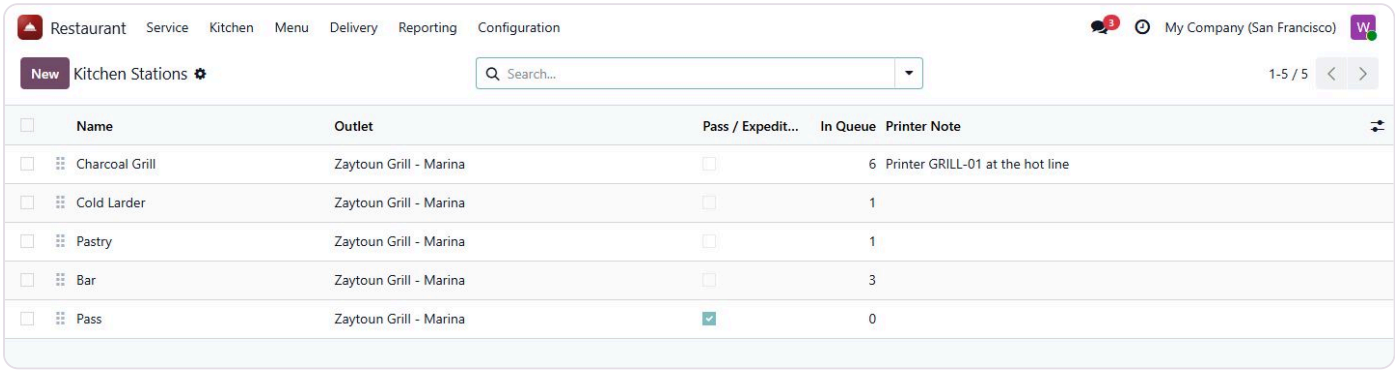

PART 5 Build the menu: dishes, recipes, modifiers and allergens

The menu is where a restaurant's margin is decided. Each dish carries a price, a recipe that prices the plate, the station that cooks it, and everything a guest asks about: allergens, diet, spice and calories.

IN THIS PART YOU WILL LEARN

- Categories and courses
- A menu item, field by field, and the product behind it
- Recipes, units and how the plate cost is worked out
- Taking a dish off for the night without deleting it
- Modifier groups with a minimum and maximum, and paid extras
- Combos, allergens and diet flags


TRY IT YOURSELF ON THE DEMO

1. Menu, Menu Items, open Mixed Charcoal Grill
2. Look at the Recipe tab, then Description & Diet and Options
3. Menu, Modifier Groups, open How would you like it cooked?

Categories

1 Menu, Categories


Categories are the sections of the menu: Cold Mezze, Charcoal Grill, Sides, Desserts, Beverages. They can nest, so a parent category such as Drinks can hold Hot and Cold. Each one counts its items.

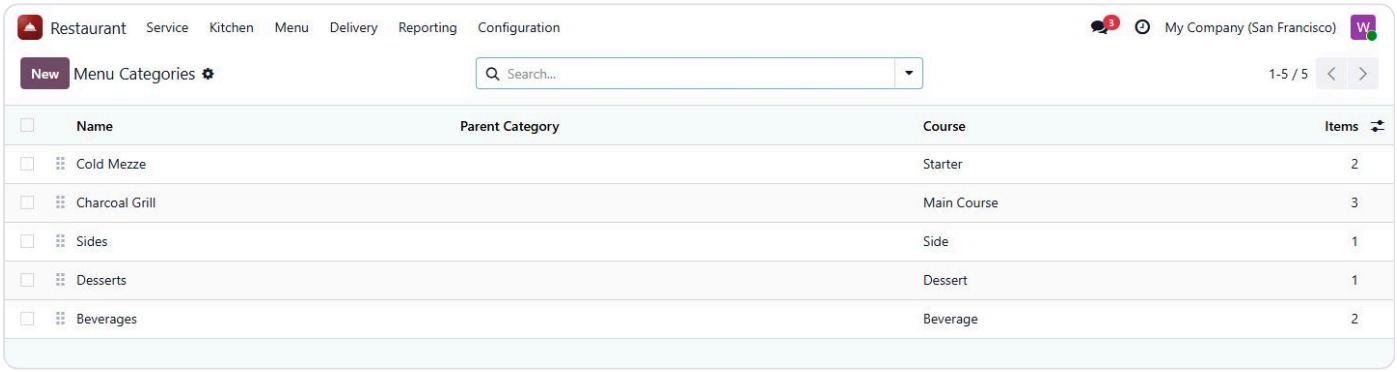

2 A category

Besides its name, colour and image, a category has a **Course**: Starter, Main Course, Side, Dessert, Beverage or Other. The course is carried on every order line, so the kitchen display and the dish report can be grouped by course.


A category cannot be its own parent, directly or further up.

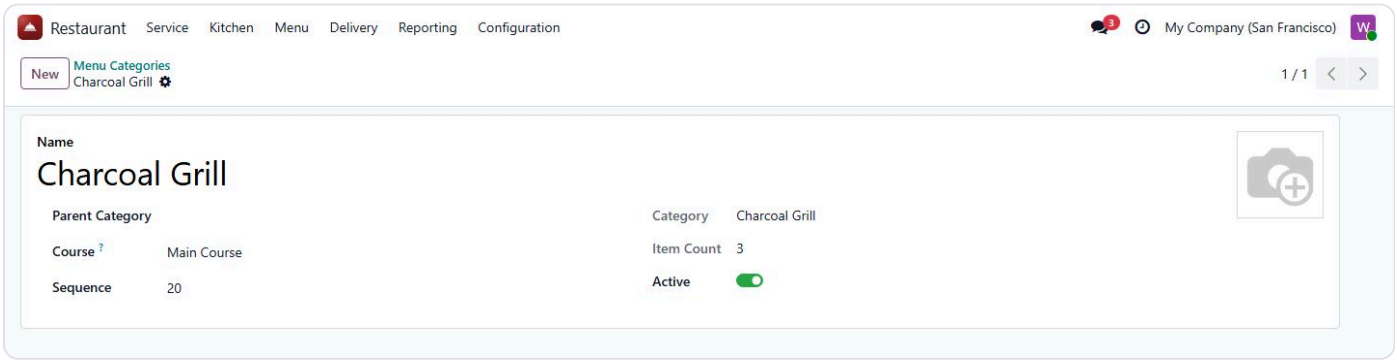

Menu items

3 Menu, Menu Items


The menu opens as cards with the photo, price and diet badges, and also has a list view. Filters show what is available or 86'd, dishes over the food cost target, stars, dogs, vegetarian, vegan and combos.

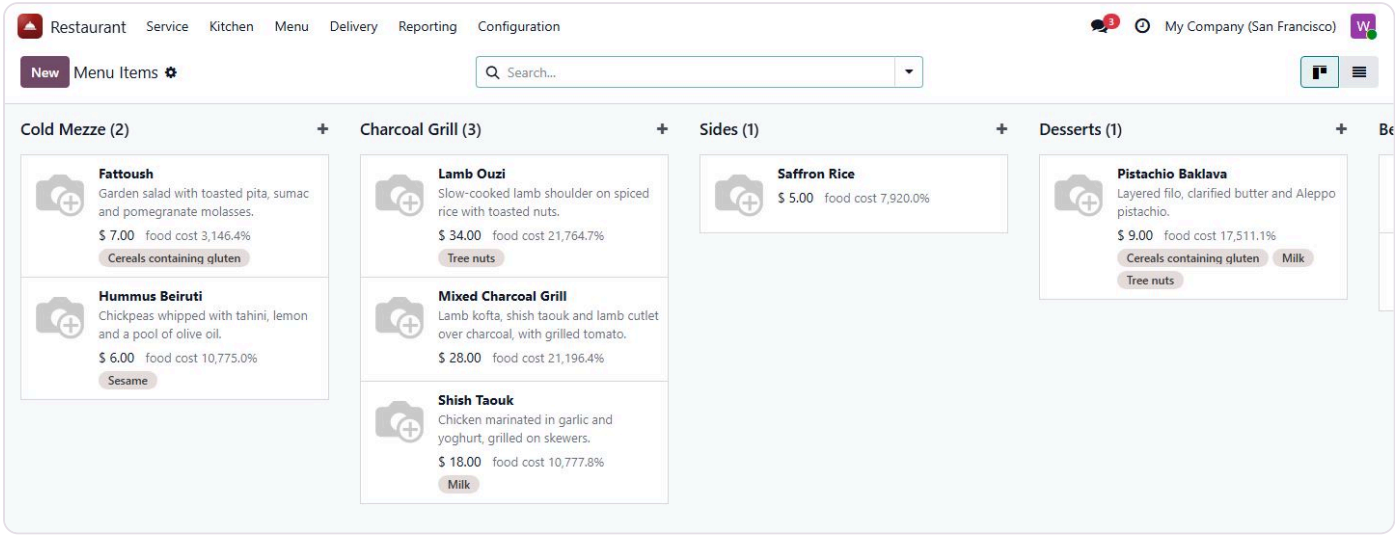

4 The dish form

On the menu: category, the **Product** that is invoiced and reported on, the **Menu Price**, the outlets it is **Sold At** (empty means every outlet) and the company. **Kitchen**: the station it is **Cooked At**, the **Prep Time** in minutes, whether it is **Available**, and the hours it is **Served Between**. **Margin**: recipe cost, margin, food cost percentage and the menu engineering grade, all worked out for you.

Pick the product first and the name and price are filled from it. A menu price cannot be negative and a menu code can be used once per company.

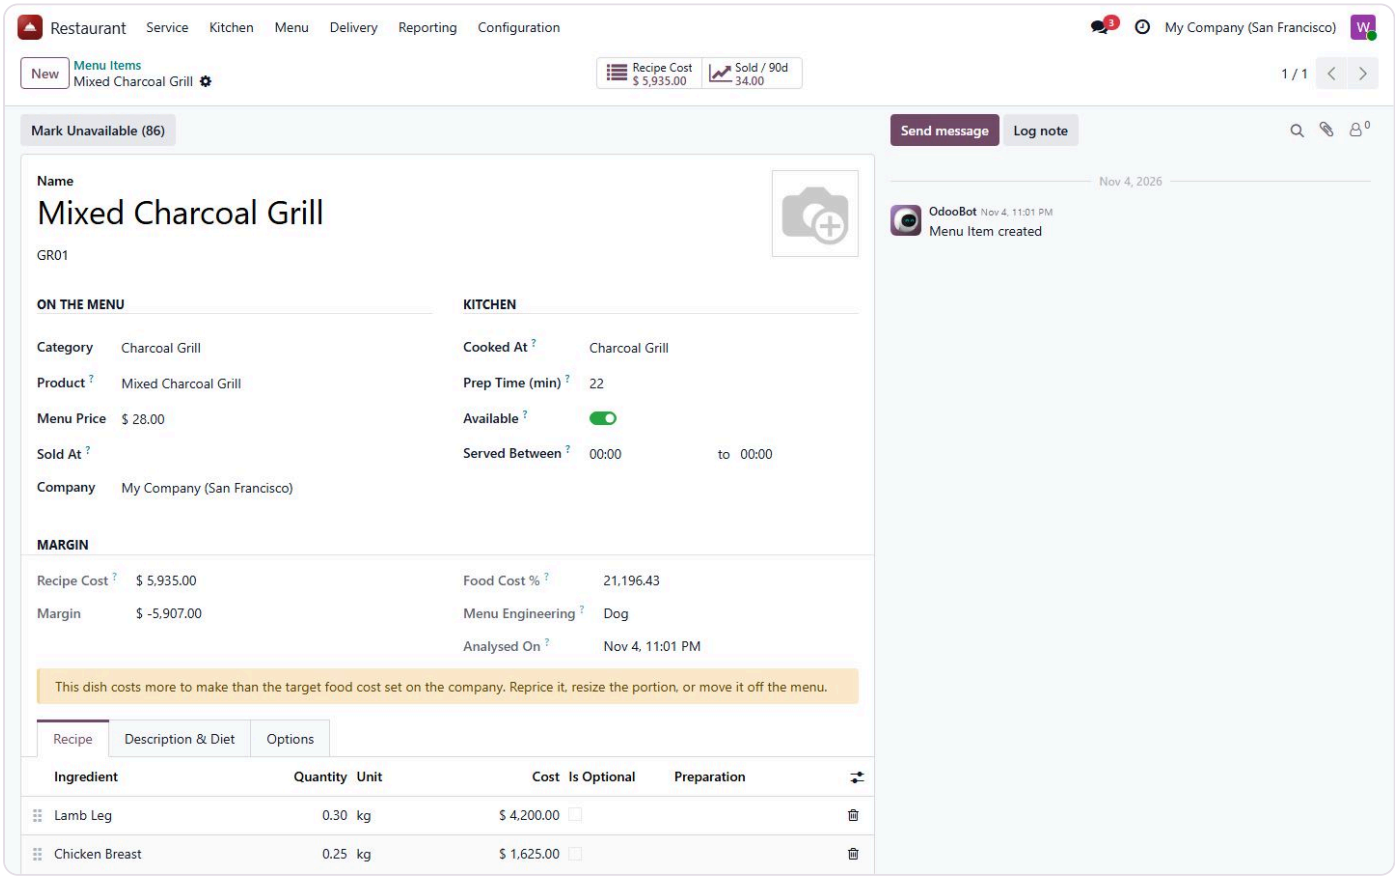

Read the demo's cost figures with care. On the demo, the ingredient products were created in Units while their recipe lines are in kg, so Odoo converts 0.30 kg into 300 units and the recipe cost comes out a thousand times too high. That is why the screens show food cost percentages in the thousands and negative margins. In your own database, give each ingredient product the unit you buy it in (kg, litre, unit) and use a matching unit on the recipe line. The module converts between units but does not warn you when the two do not belong together.

How the plate is costed

Each recipe line costs **quantity × the ingredient's cost price**, converted to the ingredient's own unit first. The dish's **Recipe Cost** is the sum of the lines, **Margin** is menu price less recipe cost, and **Food Cost %** is recipe cost divided by menu price. If the food cost is above the company target, the dish is flagged **Over Target** and a yellow warning appears on the form. Because the cost price comes from the product, a new purchase price updates every dish that uses it.

HOW IT WORKS


Worked example: Hummus Beiruti, set up correctly

Chickpeas 0.15 kg	× 1.80 per kg = 0.27
Tahini 0.04 kg	× 5.40 per kg = 0.22
Olive oil 0.02 kg	× 8.00 per kg = 0.16
Pita bread 2 units	× 0.25 per unit = 0.50
Recipe cost	**1.15** against a menu price of 6.00
Food cost	**19.1%**, under the 33% target, margin 4.85

5 The Recipe tab


One line per ingredient: the product, the quantity, the unit, the cost, whether the kitchen may leave it out (**Is Optional**, still costed) and a preparation note. The **Recipe Cost** button at the top opens the same lines as a list.

An ingredient must be a goods product, and its quantity must be above zero.

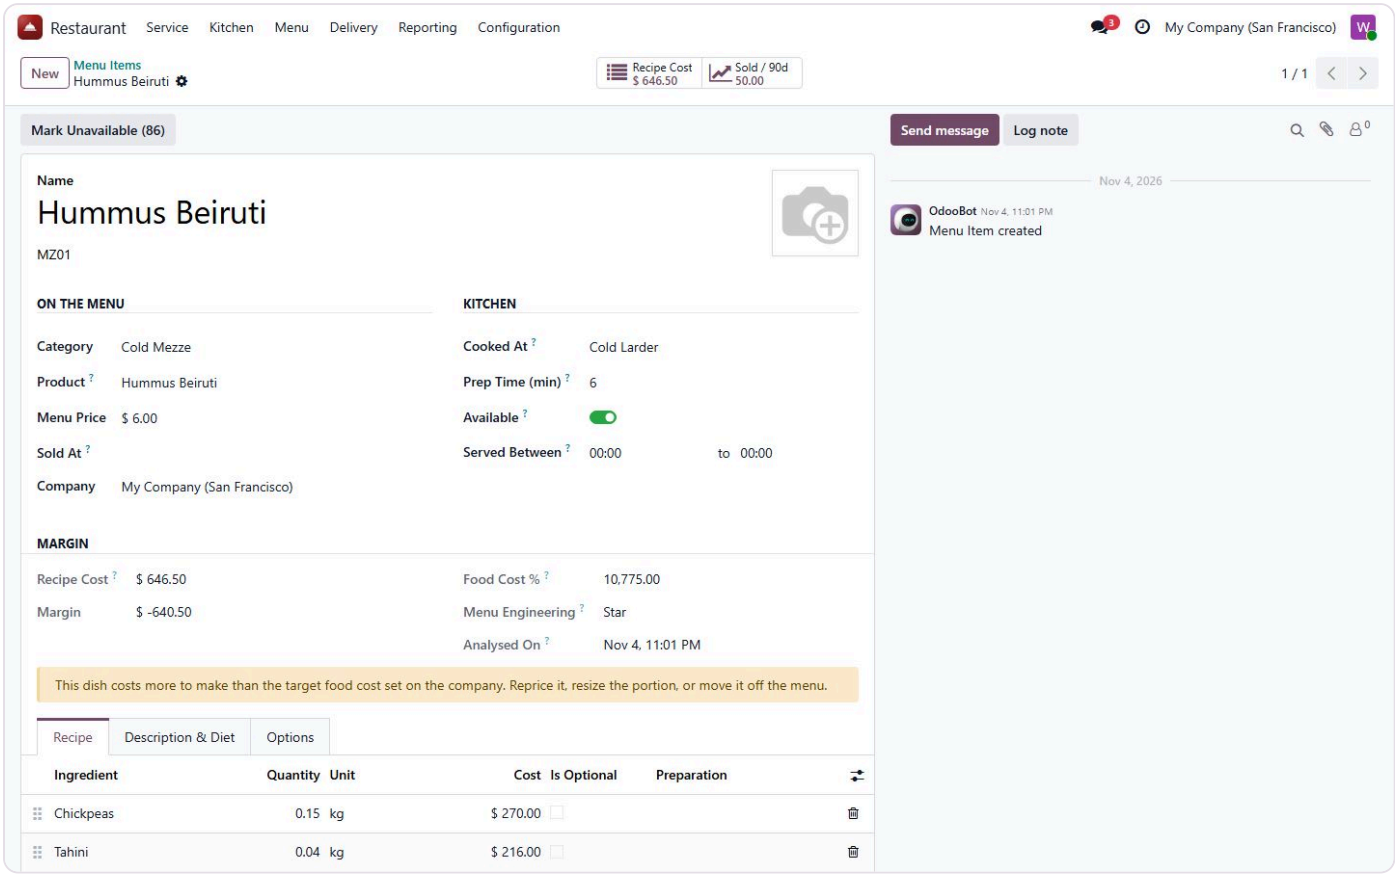


6 Description & Diet

The menu description, **Calories**, **Spice Level** (Not Spicy, Mild, Medium, Hot), the **Vegetarian**, **Vegan** and **Halal** flags, and the **Allergens** the dish contains.

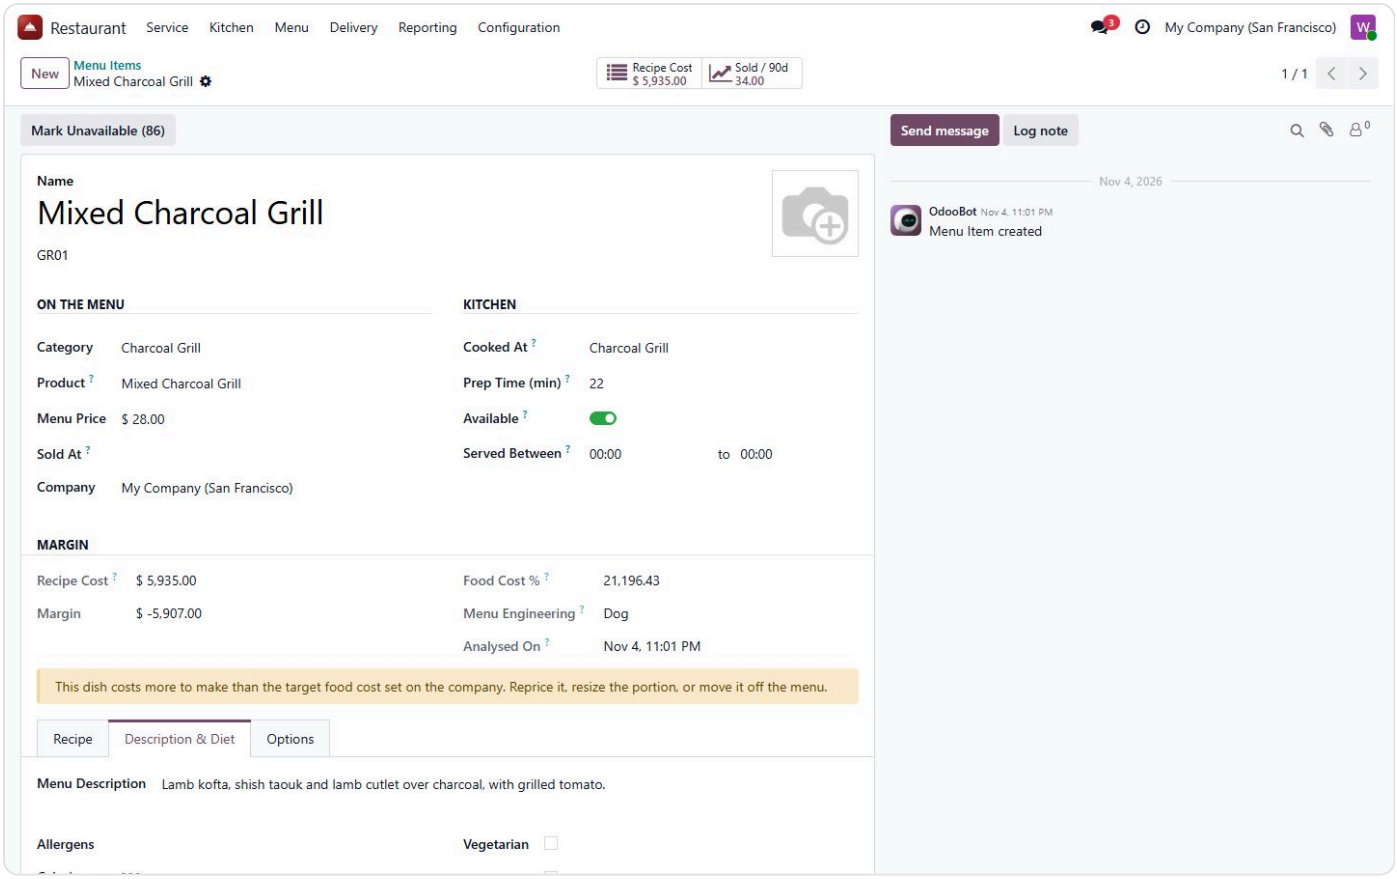

7 Options

The modifier groups the guest chooses from for this dish. The grill takes both: how it is cooked and the paid extras.

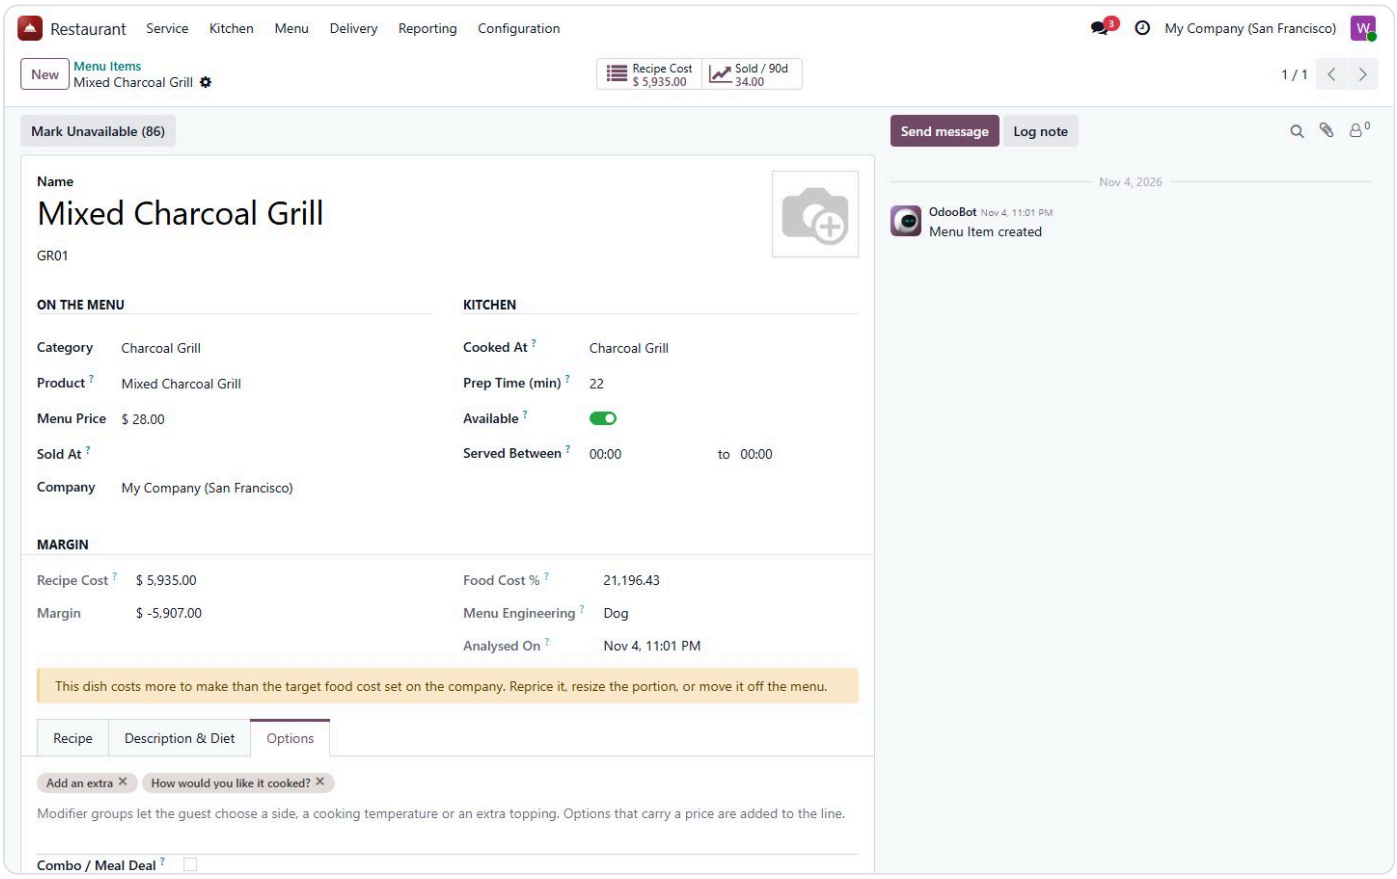

Taking a dish off for the night


The button at the top of the dish form reads **Mark Unavailable (86)**. It switches the dish off without deleting it, and an order that contains an unavailable dish cannot be sent to the kitchen: the message names the dishes. Press it again to bring the dish back. The **86'd** filter on the menu lists everything currently off.

> **Served Between** is checked when the hours are saved (the start cannot be after the end), but sending an order does not check the time of day. A breakfast dish ordered at nine at night goes through. Use the 86 button for anything that must not be sold.

Modifier groups

8 Menu, Modifier Groups


A modifier group is a question with options, such as How would you like it cooked? or Add an extra. The list shows how many options each has and its limits.

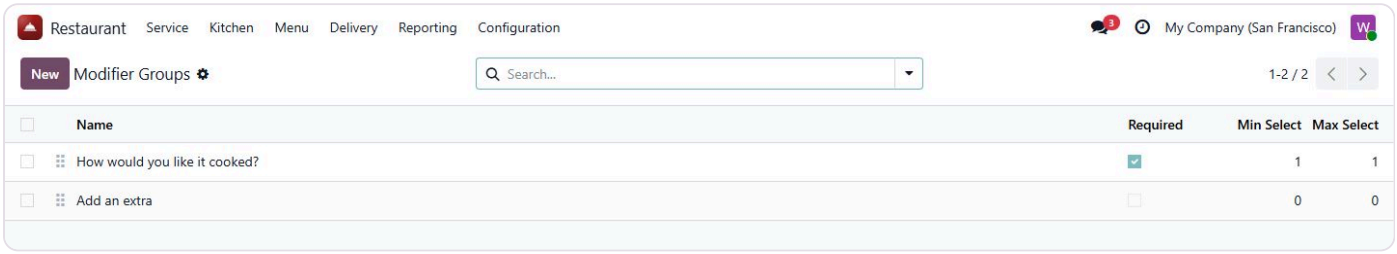

9 A required choice


Required, a **Min** and a **Max**. How would you like it cooked? is min 1, max 1: exactly one answer. Each option can carry an **Extra Price**, and can name a product it **Consumes** with a quantity.

Limits cannot be negative and the minimum cannot be above the maximum. A maximum of 0 means as many as the guest likes.

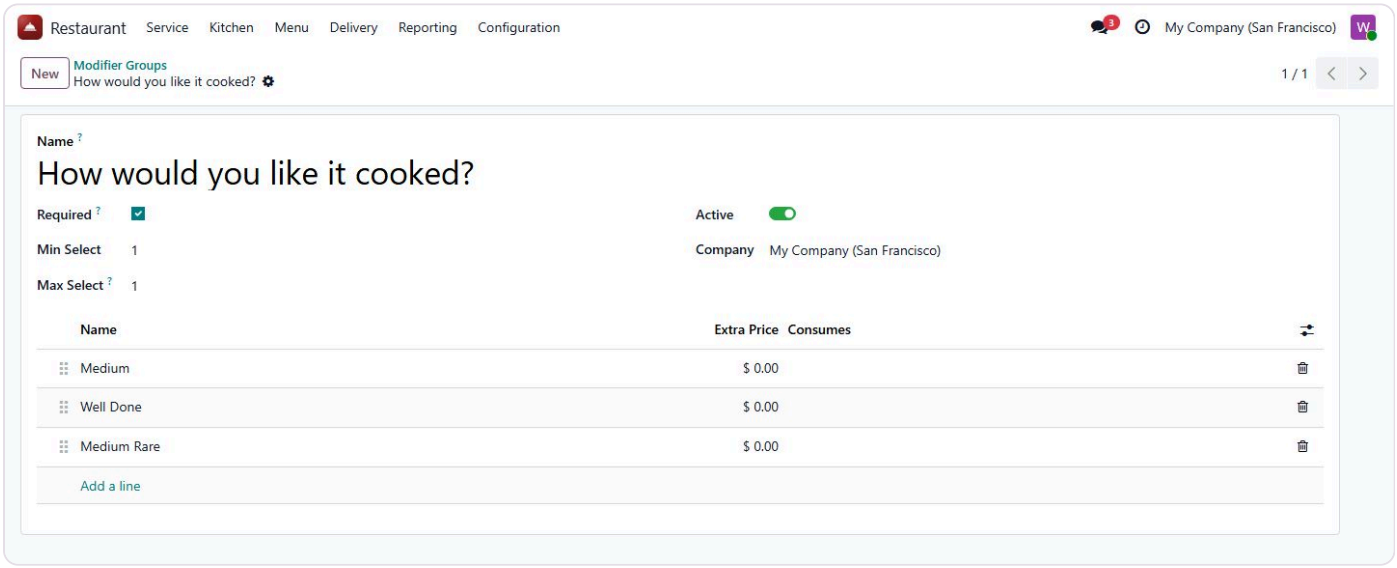

10 Paid extras


Add an extra is min 0, max 0: optional, as many as wanted, each with its own price. When an option is picked on an order line, its price is added to the line and its name is printed on the bill and the invoice.

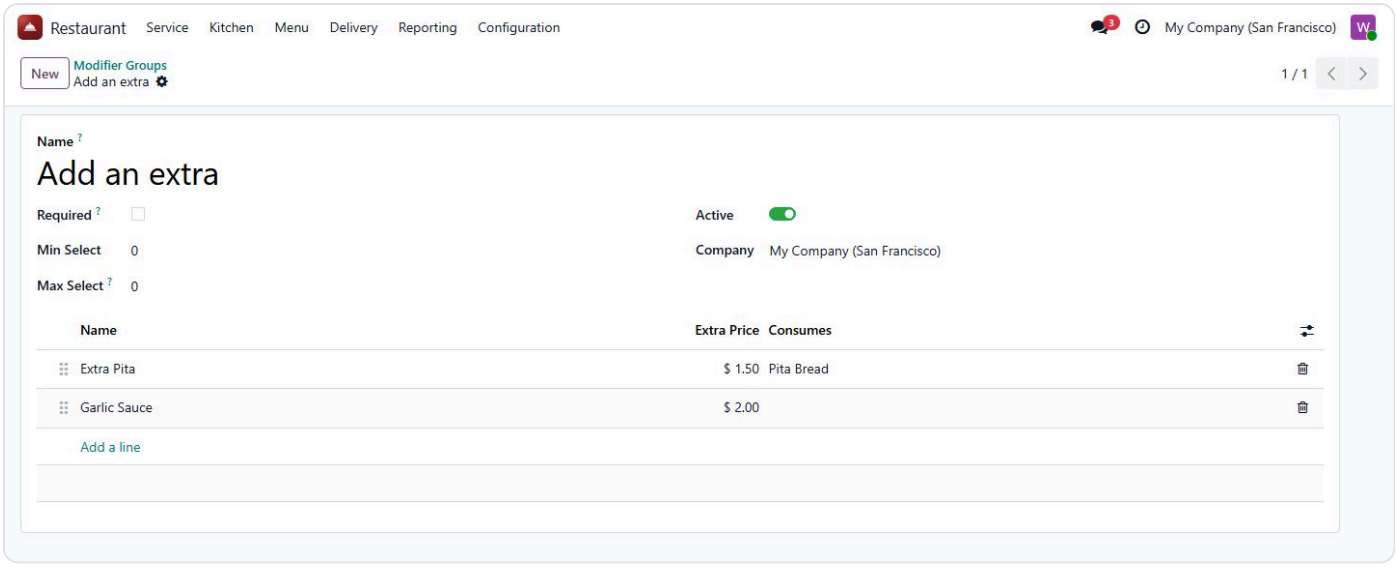

> The limits and the Consumes product are stored on the group and option. This version does not enforce the minimum and maximum when options are picked on an order line, and only the recipe of the dish itself is taken out of stock, not the extras.

Combos and allergens

Tick **Combo / Meal Deal** on a dish and a Combo tab appears where you list the dishes it contains. A combo is priced as a whole, and a dish cannot contain itself or list contents without being a combo. The demo has no combos.

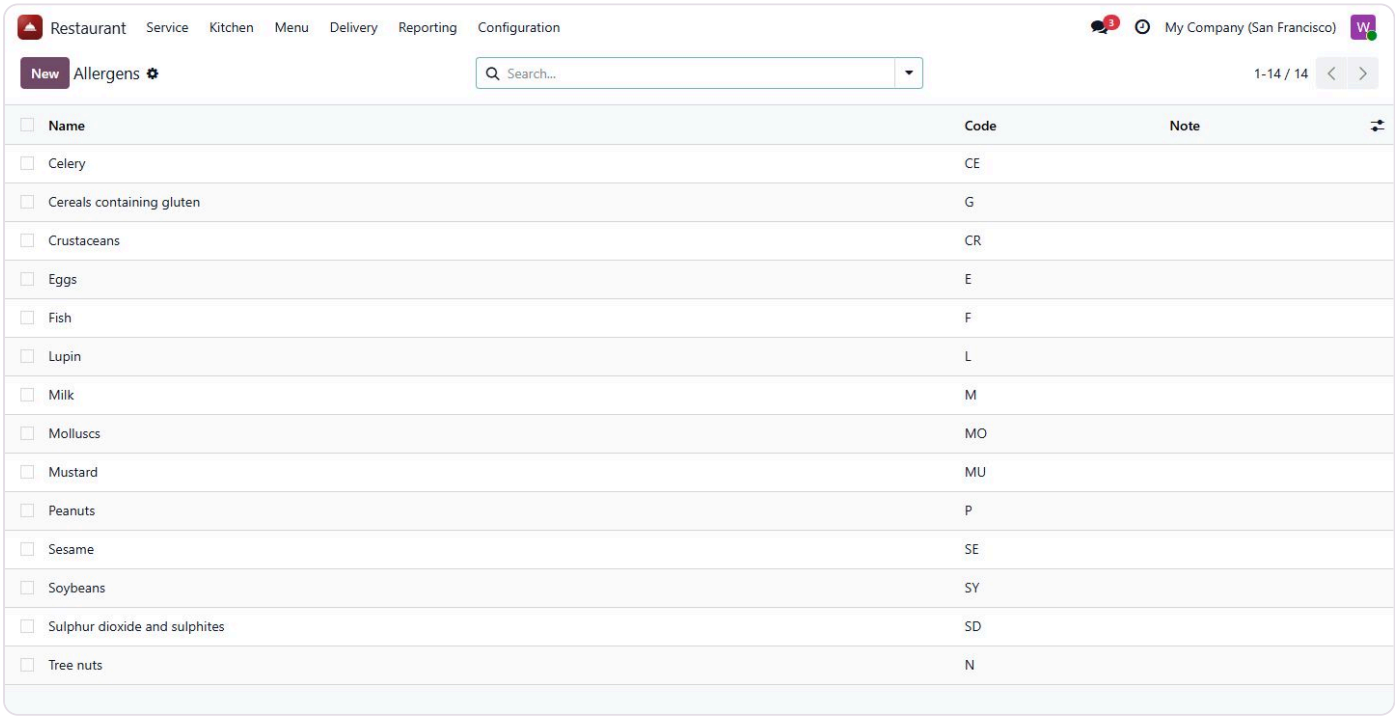

Menu, Allergens. The fourteen allergens most menus must declare are loaded on install, each with a short code such as G for gluten or SE for sesame.

PART 6 Take an order and move it through service

Every order, whatever its type, walks the same path: draft, sent to the kitchen, preparing, ready, served, billed, paid. This part takes a dine-in order from the first dish to the moment it is served, using the orders the demo has left half-cooked at each stage.

IN THIS PART YOU WILL LEARN

- The Orders screen, its filters and its six views
- Starting an order from a table or from New
- Lines: dish, options, special request, discount and void
- What Send to Kitchen does to the lines, the table and the stock
- Start Cooking, Ready and Serve, and the times stamped on each
- Cancel and Reset to Draft


TRY IT YOURSELF ON THE DEMO

1. Service, Orders: five open orders from today's service
2. Open ZG/ORD/2026/00061 (sent), 00062 (preparing) and 00063 (ready)
3. On 00062 open the Kitchen tab and read the allergy note

The Orders screen

1 Service, Orders


The list opens on the **Open** filter: everything sent to the kitchen and not yet paid. Each row shows the number, time, outlet, type, table, total and status, coloured by status, and a late order is shown in red. Channel, customer, waiter, rider, guests, prep time and more can be switched on from the column picker.

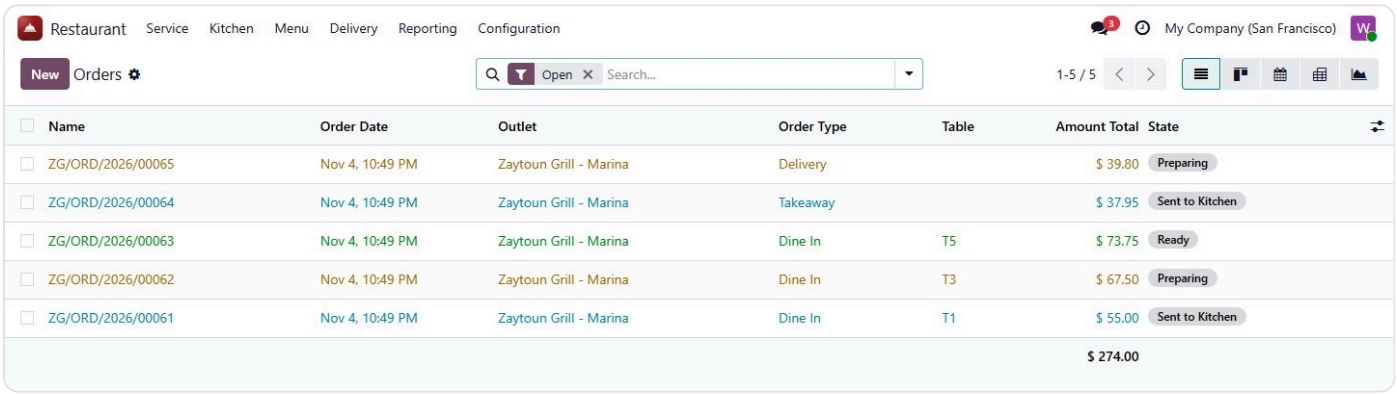

Name	Order Date	Outlet	Order Type	Table	Amount Total	State
ZG/ORD/2026/00065	Nov 4, 10:49 PM	Zaytoun Grill - Marina	Delivery		$ 39.80	Preparing
ZG/ORD/2026/00064	Nov 4, 10:49 PM	Zaytoun Grill - Marina	Takeaway		$ 37.95	Sent to Kitchen
ZG/ORD/2026/00063	Nov 4, 10:49 PM	Zaytoun Grill - Marina	Dine In	T5	$ 73.75	Ready
ZG/ORD/2026/00062	Nov 4, 10:49 PM	Zaytoun Grill - Marina	Dine In	T3	$ 67.50	Preparing
ZG/ORD/2026/00061	Nov 4, 10:49 PM	Zaytoun Grill - Marina	Dine In	T1	$ 55.00	Sent to Kitchen
					$ 274.00	

2 Filters and groups


Open, **In the Kitchen**, **To Bill**, **Late**, the four order types, **Today** and **This Month**. Group by outlet, type, channel, status, waiter, rider or date.

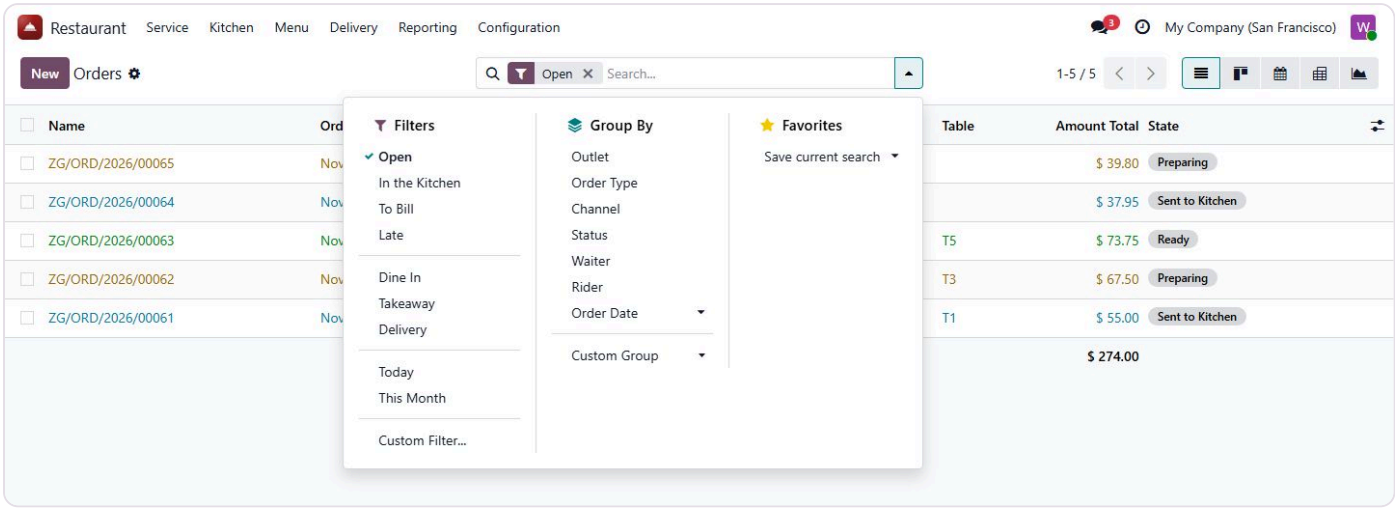

3 Kanban view

The same orders as cards, one column per status, so the floor can see at a glance what is cooking and what is waiting to be served or billed.

The screen also has a calendar view by order time and pivot and graph views, which Part 12 uses for reporting.

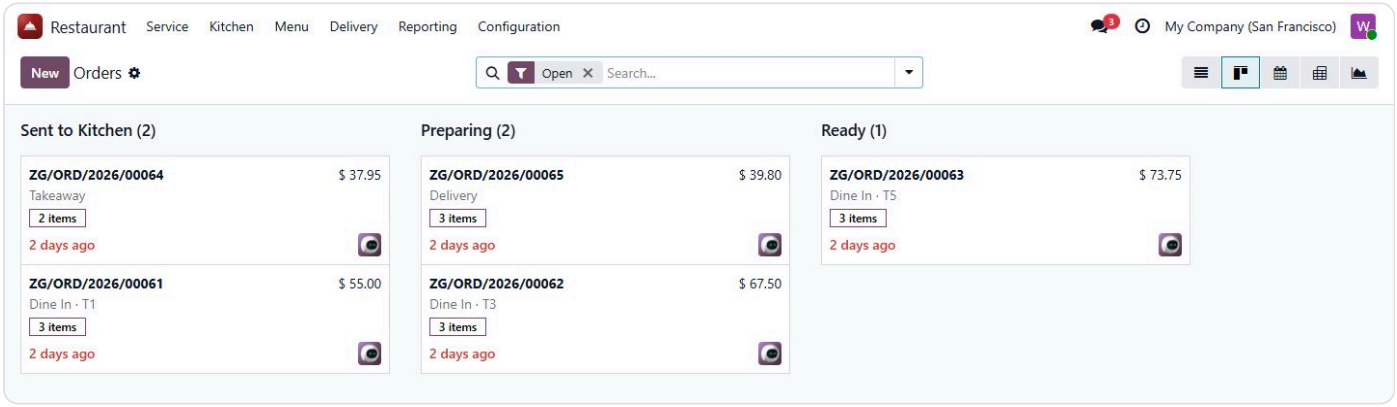

Start an order

There are two ways in. From **Service, Floor Plan**, press **Open Order** on a free table: a new dine-in order opens with that table, its outlet and as many guests as the table has seats. From the Orders screen, press **New** and pick the outlet, the **Order Type** and the **Channel**. Changing the type to anything but dine-in clears the table; choosing Delivery sets the channel to Phone.

FIELD	WHAT IT IS FOR
Outlet	Which restaurant or kitchen. Locked once the order leaves draft.
Order Type	Dine In, Takeaway, Delivery or Aggregator. Locked once sent.
Channel	Walk-in, Phone, Table QR, Own Website, Talabat, Deliveroo, Uber Eats, Careem, foodpanda, Swiggy, Zomato or Other.
Table and Guests	Dine-in only, and a dine-in order cannot be saved without a table.
Waiter	The user who took it, by default the one signed in.
Customer, name and phone	For anything not eaten in. Picking a contact fills the name, phone and delivery address.

Add the dishes


In the **Items** tab add one line per dish. Picking the dish fills the description, the menu price, the station that cooks it and the taxes of its product. On each line you can add **Options** (the modifier choices, whose extra prices are added to the line), a **Special Request** such as no onions, a quantity and a **Discount (%)**. Below the lines sit the order discount, the subtotal, service charge, delivery fee, tax, total and the tip.

Send it to the kitchen

4 Send to Kitchen


The order is now **Sent to Kitchen**. Every line has moved from Draft to **Queued** at its station, the table shows as occupied, the time is stamped, and if the outlet consumes ingredients the recipe has been taken out of stock. The chatter records it.

Send to Kitchen refuses an order with no lines and an order holding a dish that is marked unavailable.

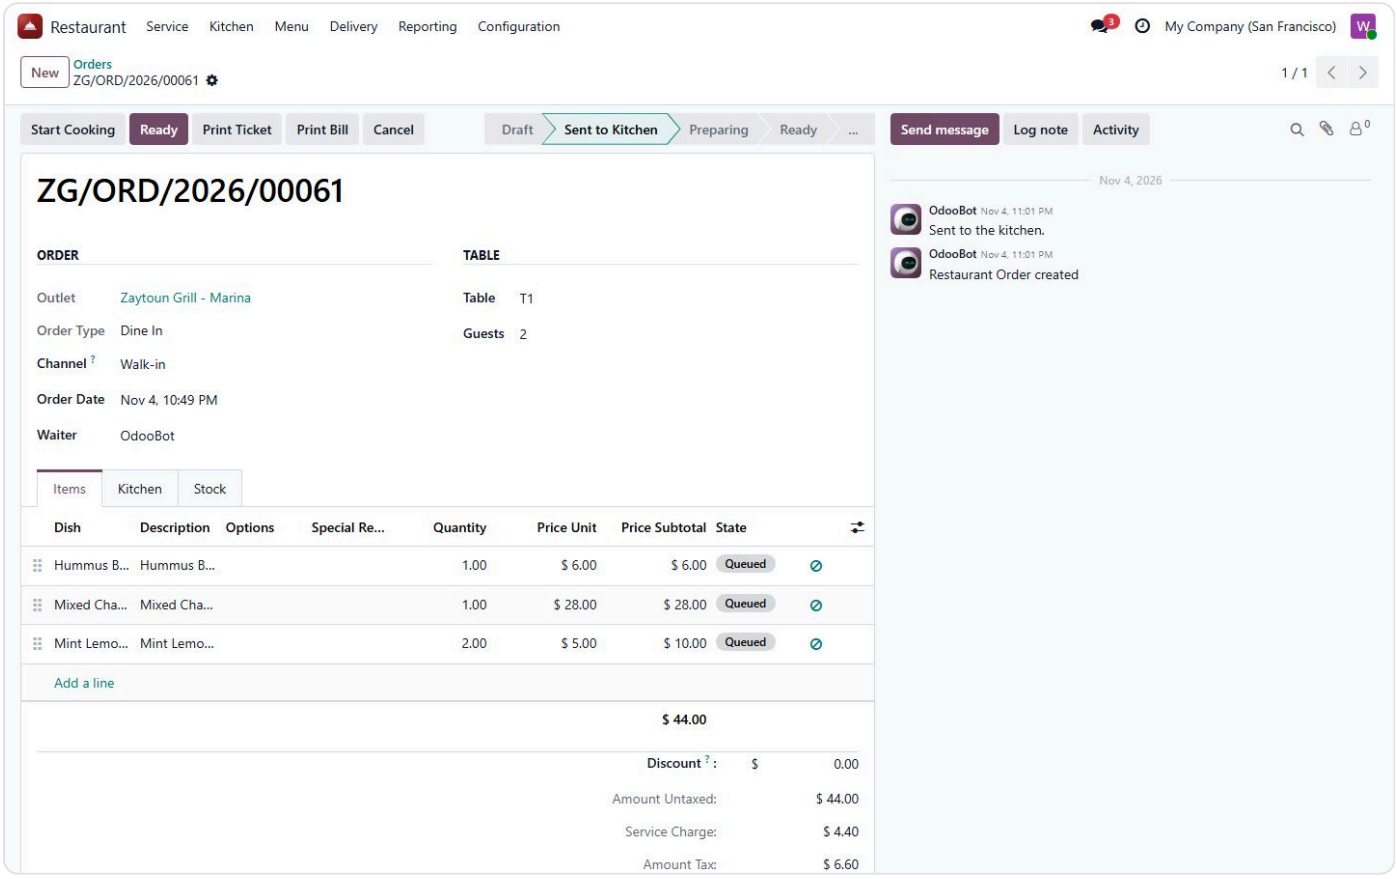

5 Start Cooking


Once a station picks it up the order is **Preparing** and its queued lines are preparing too. This happens on its own when a cook presses Start on the kitchen display (Part 7), or from the order with Start Cooking.

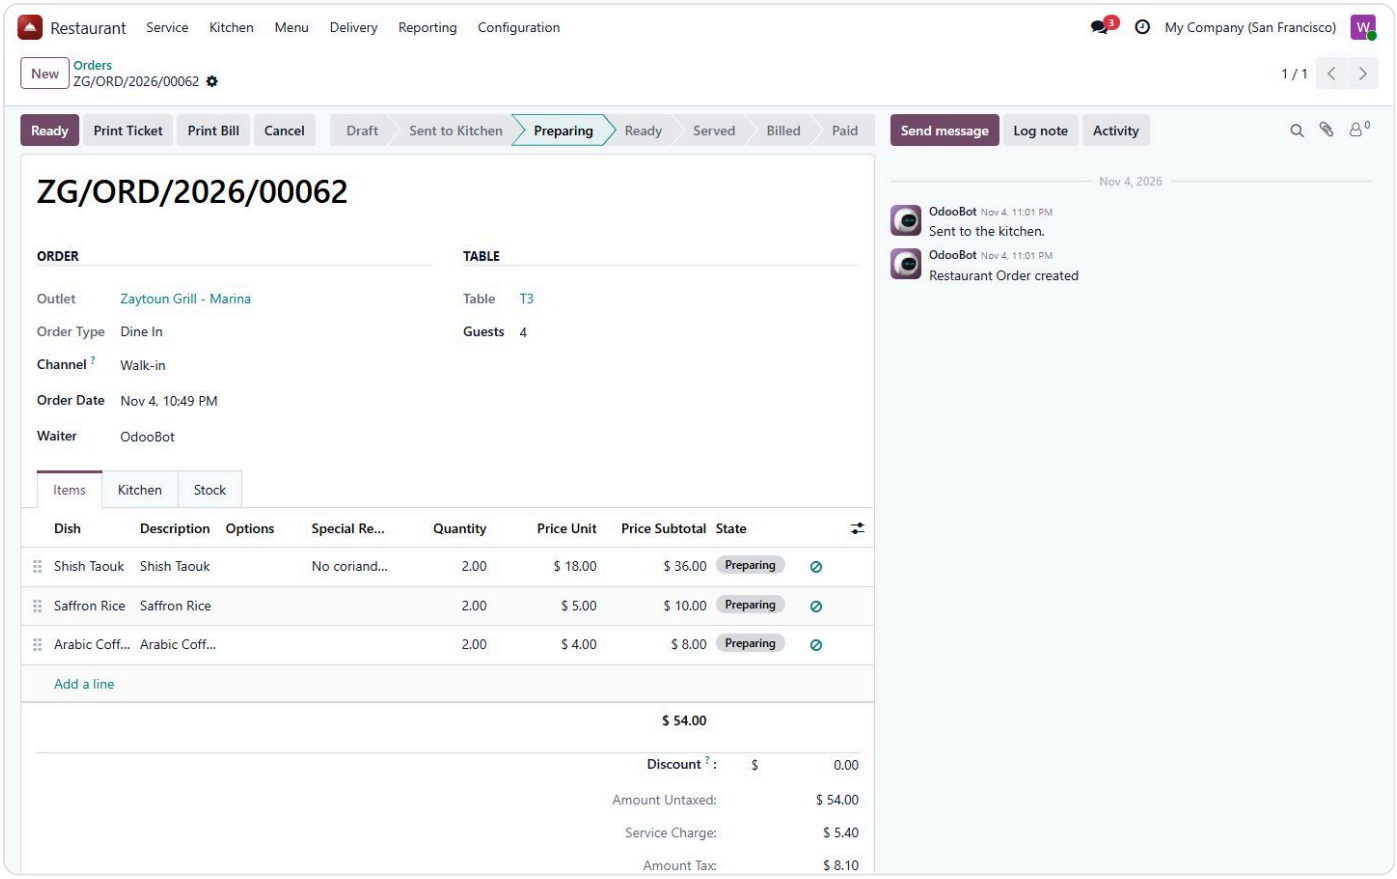

6 The Kitchen tab


Note for the Kitchen holds anything the chef must know about the whole order, here a coriander allergy at table 3. Next to it the times: sent, ready, served, and the **Prep Time** in minutes from sent to ready.

A note on a single line, such as No coriander - allergy, shows on that dish's card on the kitchen display with a warning sign.

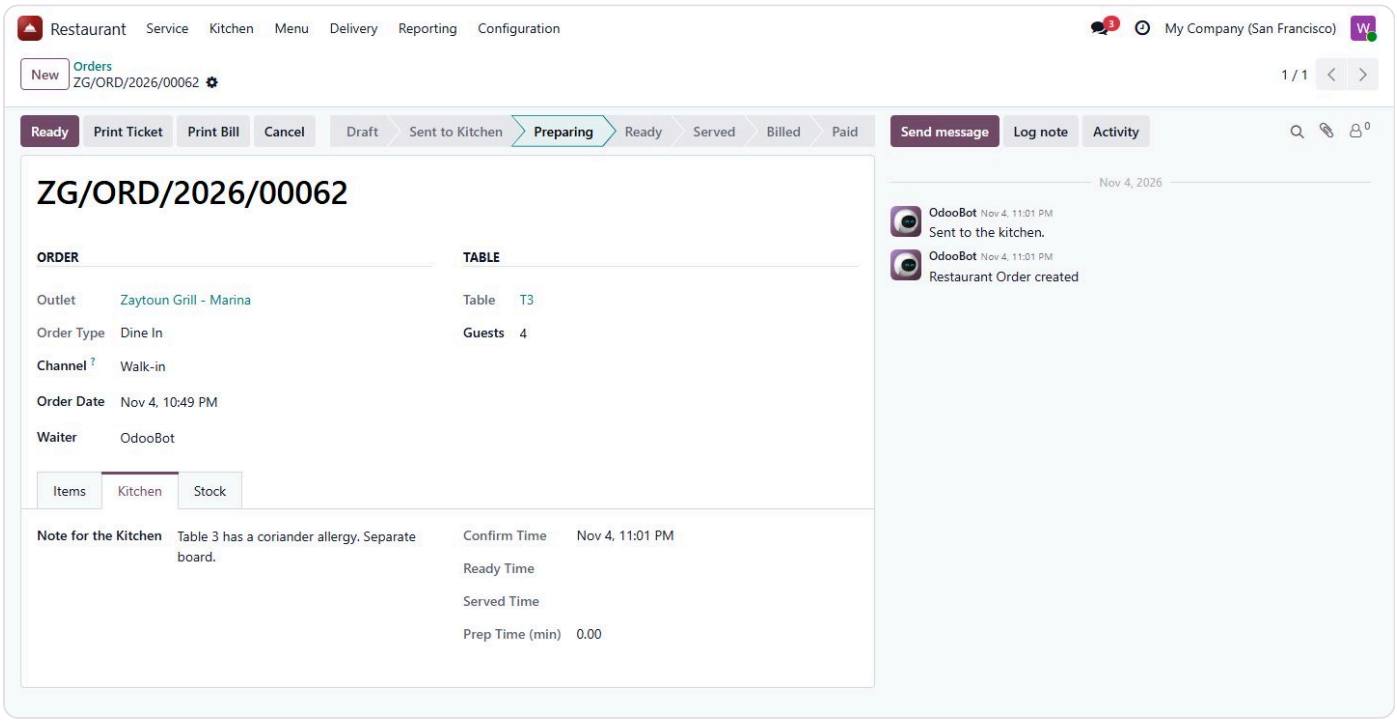

7 Ready

When every dish is ready the order is called **Ready**, which stamps the ready time. Pressing Ready on the order marks every line ready at once.

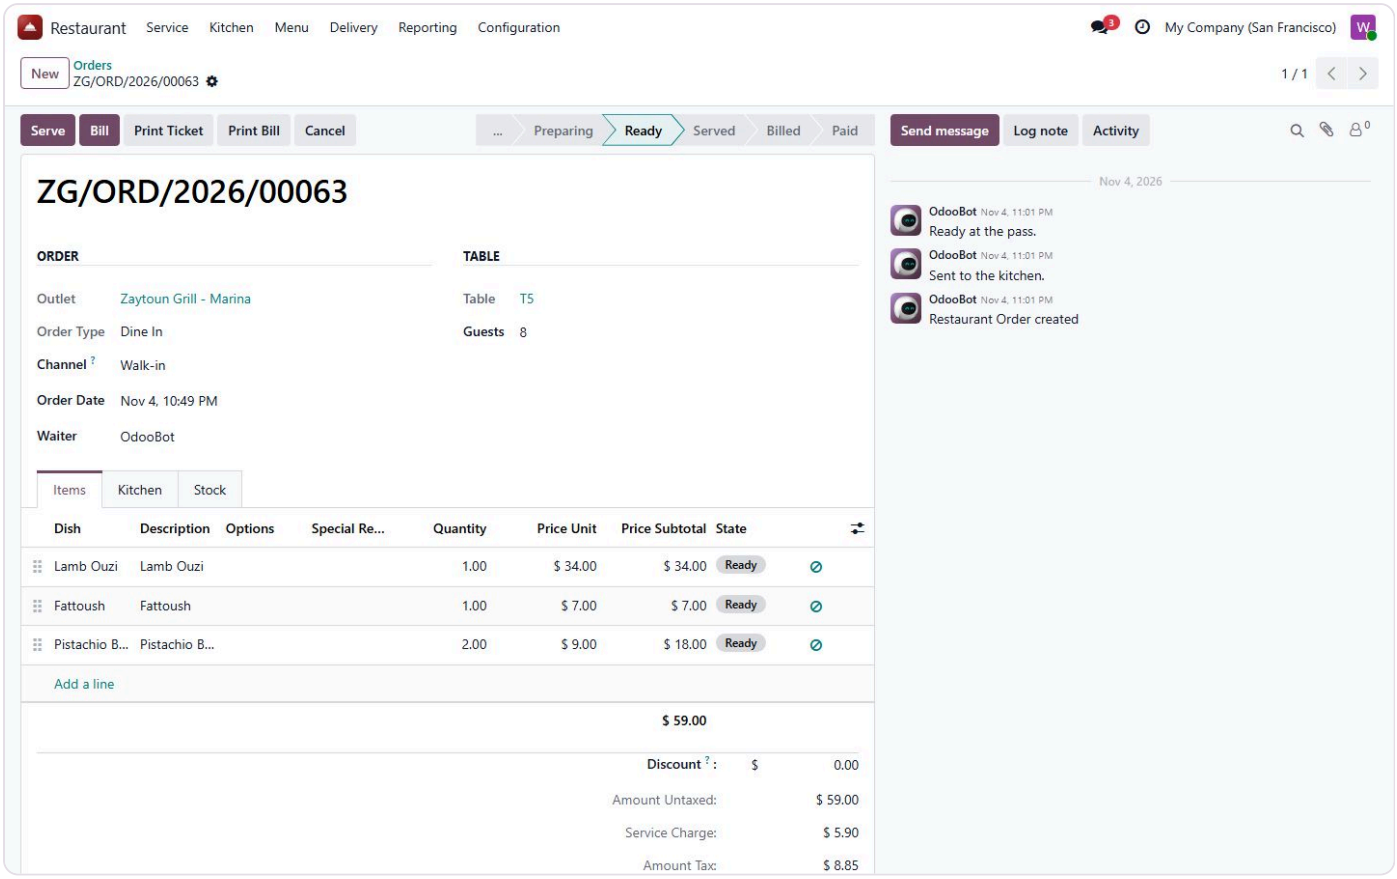

Serve marks the order and all its lines served and stamps the time. If the company setting Bill When Served is on, the invoice is created at the same moment. From Ready (or earlier) the order can also be billed straight away, which Part 10 covers.

Void a line, cancel an order

The ban icon at the end of a line **voids** it: the line stays on the order for the record but drops out of the totals, the bill and the invoice. A line cannot be voided once the bill is out. **Cancel** on the order asks for confirmation, puts back any ingredients already taken out of stock, voids every line and sets the table to needs cleaning. An order whose invoice is already posted cannot be cancelled: credit the invoice instead. A cancelled order can be **Reset to Draft** as long as it has no invoice.

PART 7 The kitchen display and the stations

The kitchen does not need to see orders. It needs to see dishes, sorted by who cooks them. The kitchen display shows every line still in the kitchen, one column per station, with Start and Ready on each card.

IN THIS PART YOU WILL LEARN

- The station board and what is on a card
- Start and Ready per dish, and how the last Ready calls the order
- The list and pivot views of the same lines
- Filters for the pass, the queue and today


TRY IT YOURSELF ON THE DEMO

1. Kitchen, Kitchen Display
2. Find the Shish Taouk card with the allergy warning in Charcoal Grill
3. Switch to the list view, then group by Course

1 Kitchen, Kitchen Display

Every line that is queued, preparing or ready, grouped by station: Charcoal Grill, Cold Larder, Pastry, Bar. A card shows the quantity and dish, the order number, the station, the table or the order type, any special request with a warning sign, and how long ago it was ordered.

On the demo every card says 2 days ago because the demo service was seeded then and left in place.

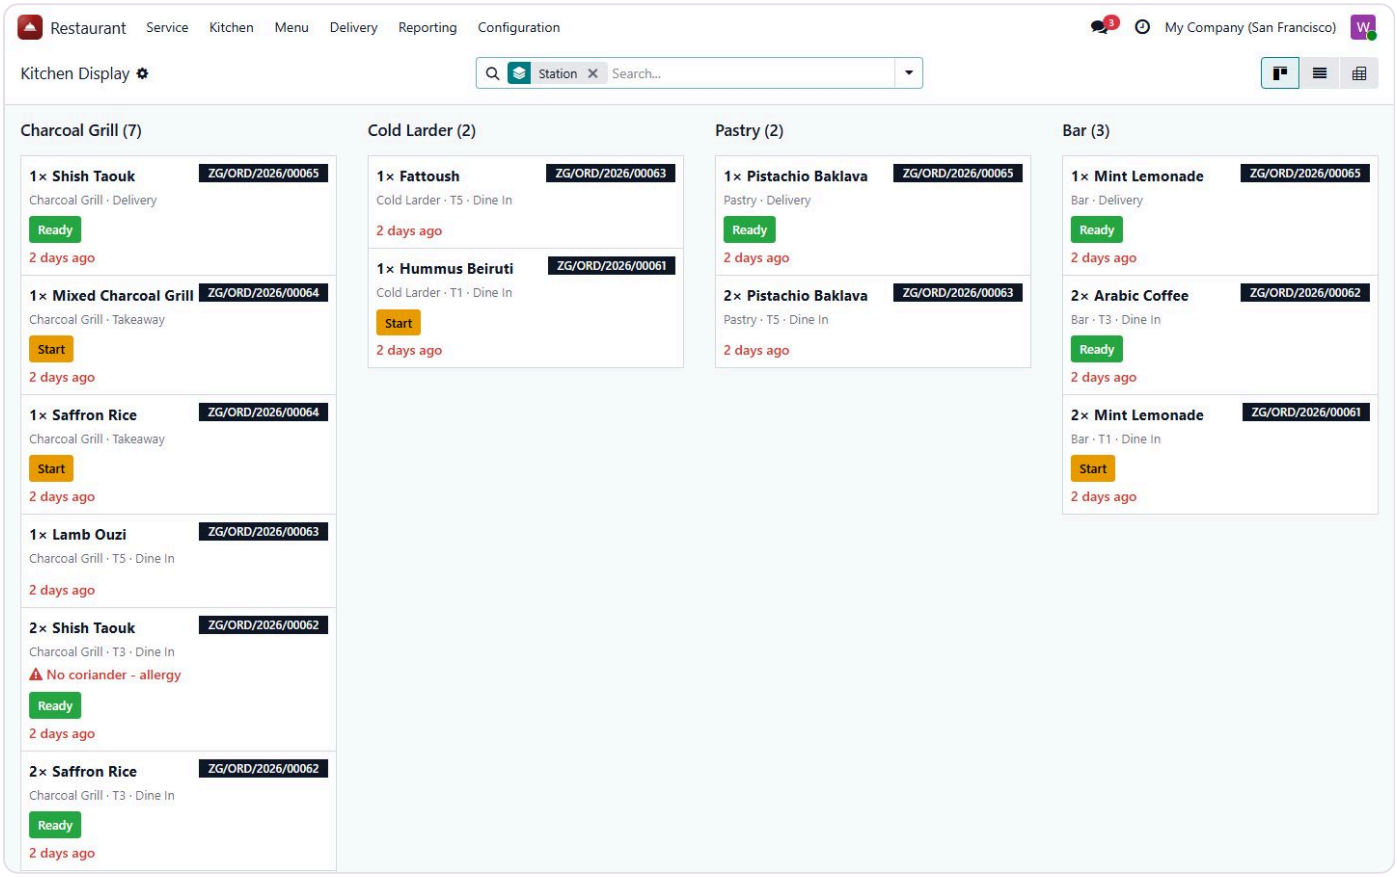


2 Start and Ready

A queued card shows **Start**. Pressing it moves the dish to preparing, and the order with it if it was still only sent. A cooking card shows **Ready**. When the last live dish of an order is ready, the whole order is called Ready and its time is stamped, so the floor sees it on the Orders screen.

Nothing is printed or announced automatically. The board is a normal Odoo screen: reload it, or leave it open and use the view's refresh, to see new tickets.


3 The list view

The same lines as rows, with Start and Ready buttons on each, which some kitchens find faster on a small screen.

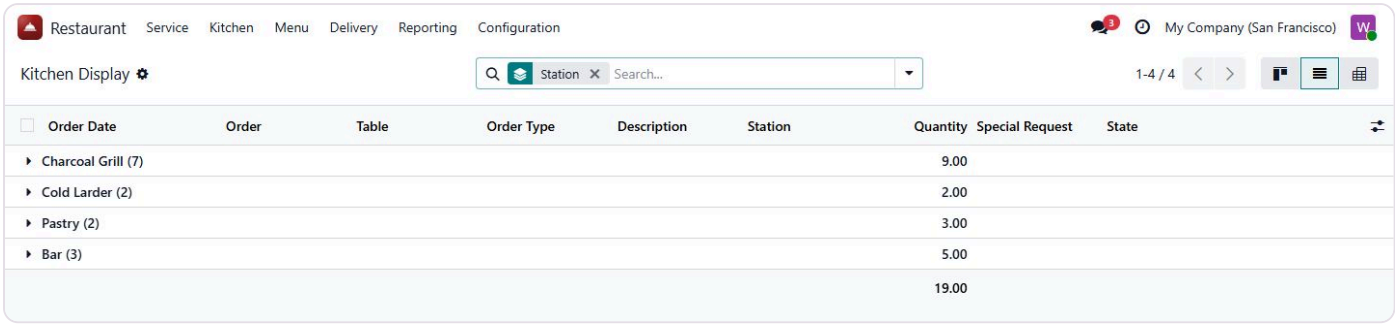


4 Filters


On the Pass, **Queued**, **Cooking**, **Ready** and **Today**, and groups by station, status, course, category and order.

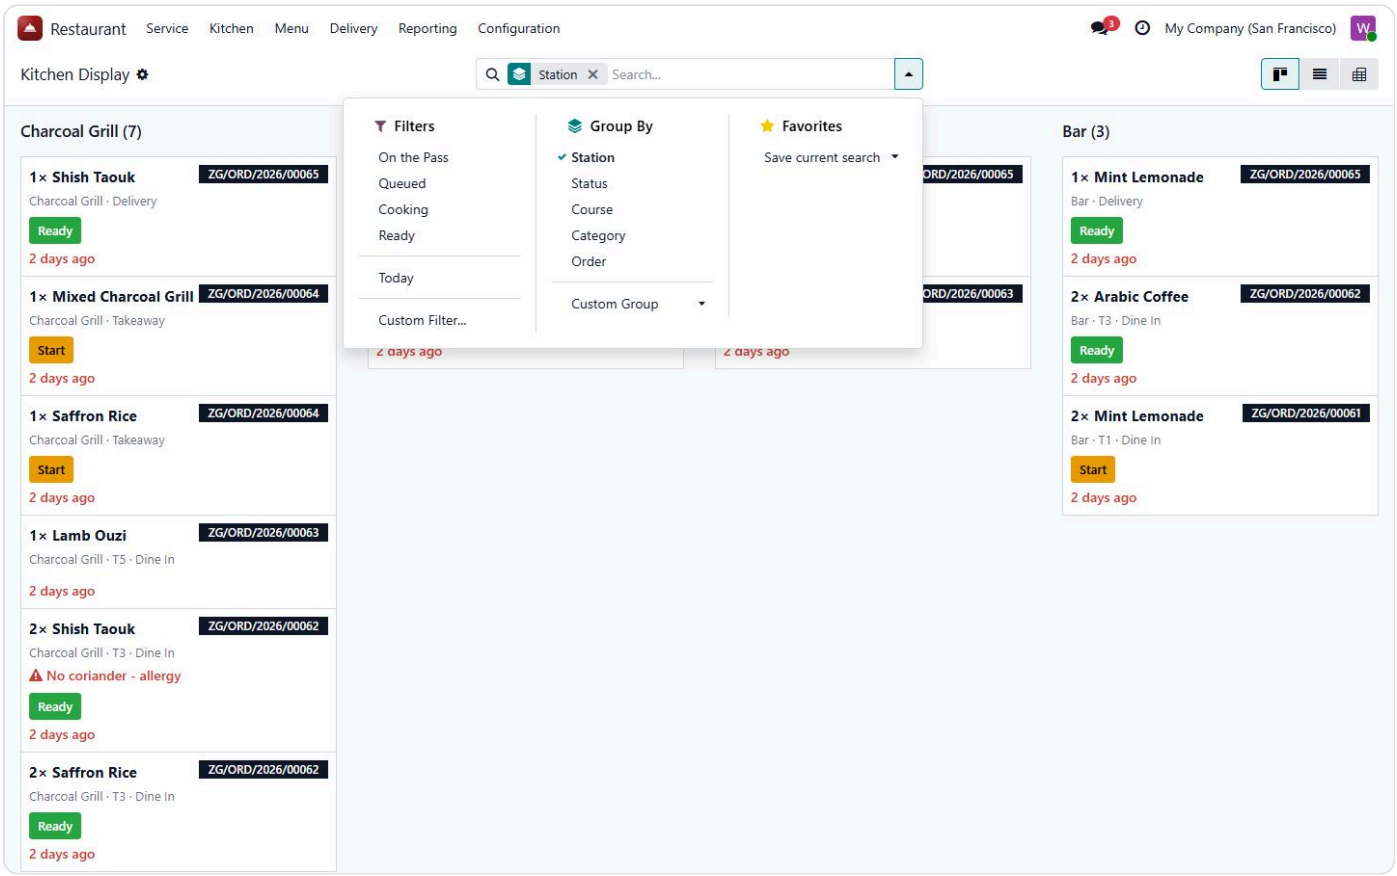


5 Pivot

Quantities and amounts of the lines in the kitchen right now, by category.

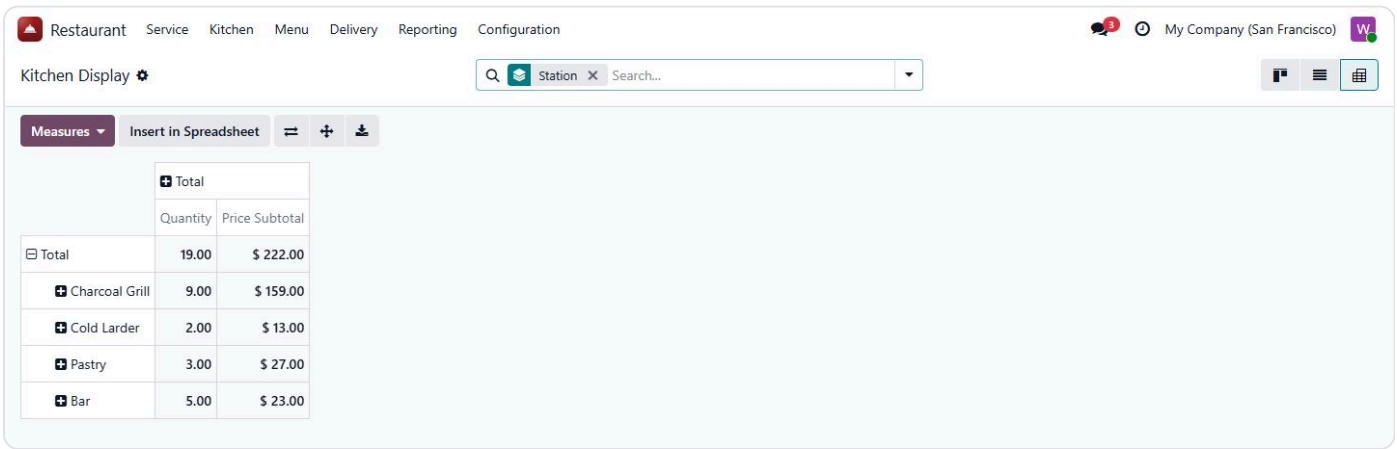

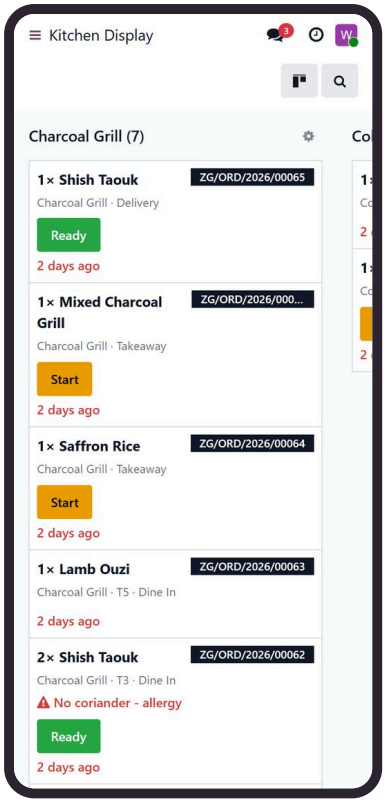

The kitchen display on a phone: one station per column, scrolled sideways.

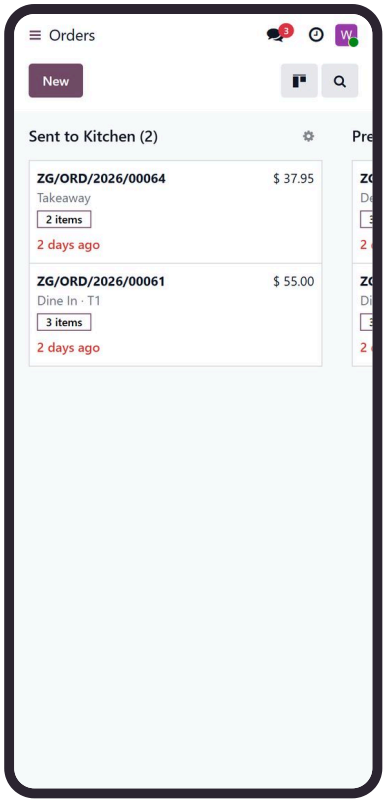

The Orders list on a phone, for a manager on the floor.

This is a kanban board inside the Odoo back office, not a dedicated kitchen screen app. It does not colour cards by waiting time or bump them off with a tap. A kitchen that needs those, or kitchen printers, should look at the Restaurant Suite or the POS Kitchen Display System.

PART 8 Takeaway, delivery, aggregators and riders

A cloud kitchen lives on orders that never sit at a table. They arrive by phone or through an aggregator app, have a time promised to the customer, and leave with a rider. This part covers all three.


IN THIS PART YOU WILL LEARN

- Takeaway and delivery orders, and the customer block
- The promised time and how lateness is decided
- Aggregator orders and the channel reference
- Delivery fees
- Riders: status, vehicle, deliveries today, on-time rate, own login

TRY IT YOURSELF ON THE DEMO

1. Service, Orders, open ZG/ORD/2026/00065, a delivery being cooked
2. Open ZG/ORD/2026/00042, a Talabat order already paid
3. Delivery, Riders, open Imran Qureshi and press Deliveries

Takeaway

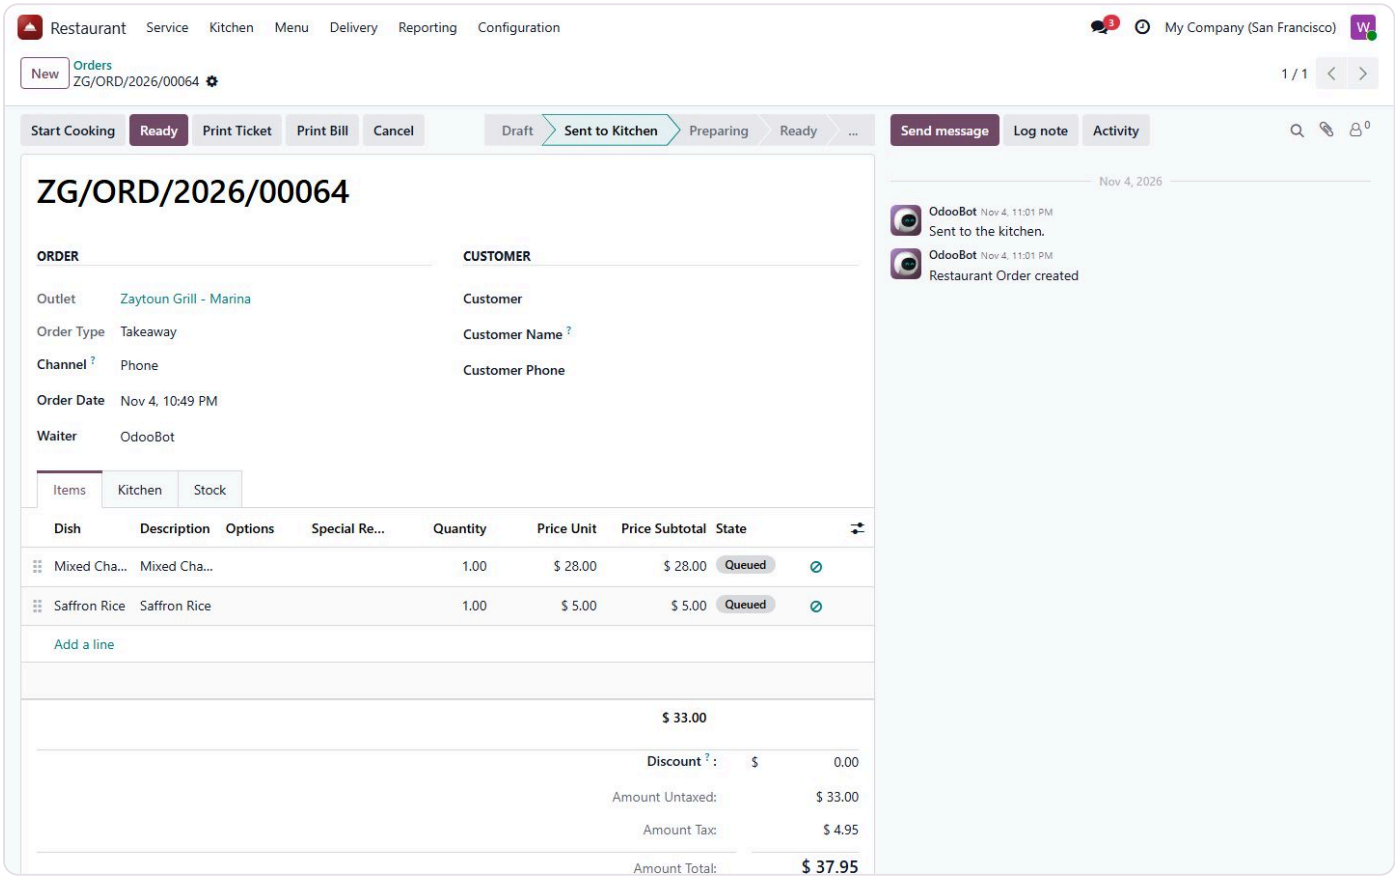


A takeaway order: no table, a Customer block for the name and phone, and the same kitchen path as any other order.

Delivery

1 The delivery block

A delivery order adds the **Delivery Address**, the **Rider** (chosen from the riders of the outlet), the **Delivery Fee**, and four times: promised, dispatched, delivered and whether it was late.

A delivery order can be saved as a draft without an address, but it cannot leave the kitchen without one.

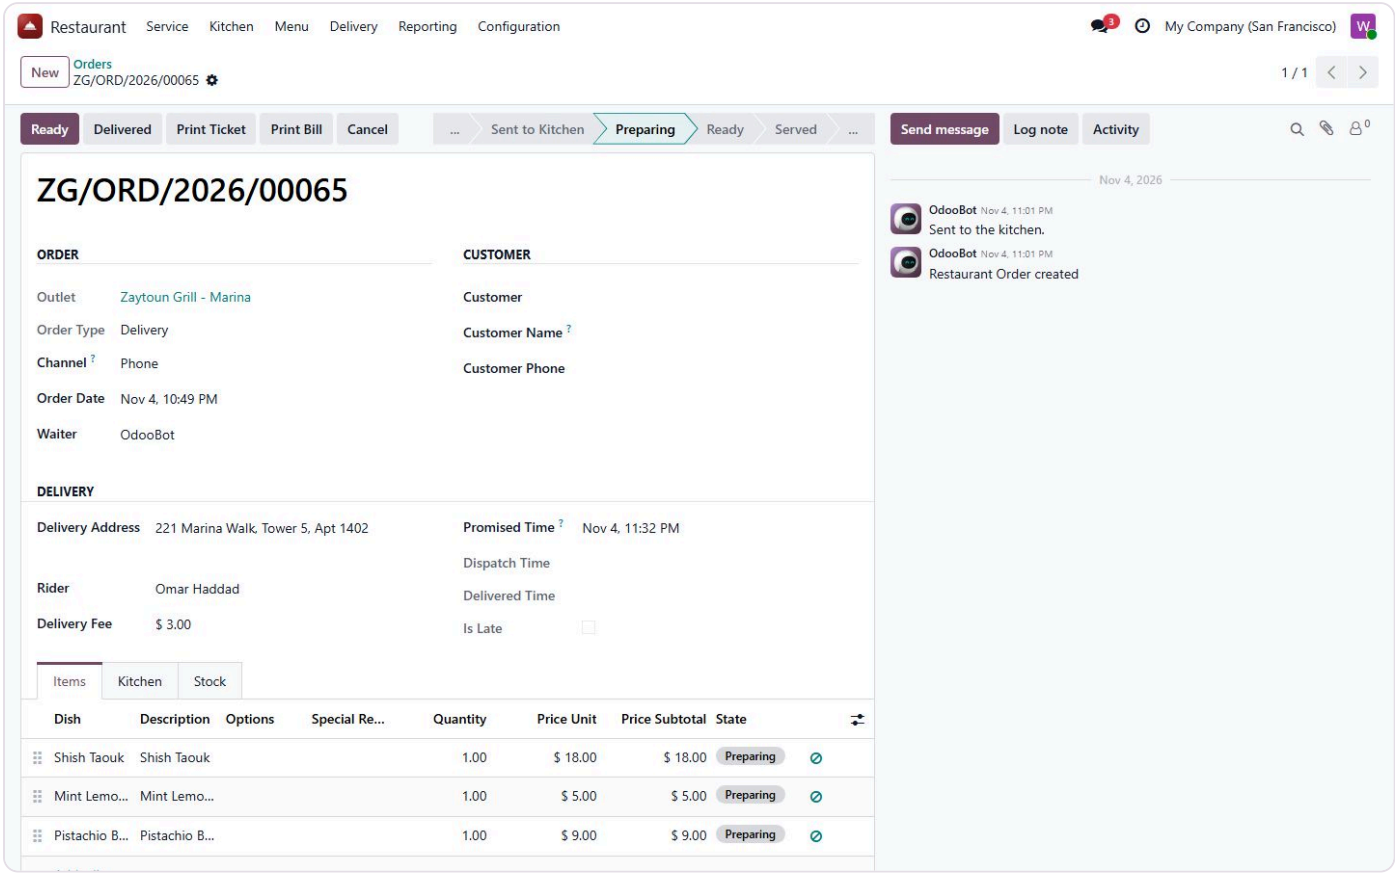

2 The promised time

When the order is sent to the kitchen the module works out the **Promised Time**: the send time plus the longest prep time of any dish on it, plus 15 minutes for delivery and aggregator orders. You can overwrite it with what the customer was actually told.

3 Dispatch and delivered


Serve on a delivery order stamps the **Dispatch Time**: the food has left. **Delivered** stamps the delivered time, and serves the order first if nobody has. If the delivered time (or the served time, for a takeaway) is after the promise, **Is Late** is ticked and the order carries a red Late ribbon.

Aggregator orders

4 An aggregator order

Order type **Aggregator** and a channel such as Talabat, Deliveroo, Uber Eats, Careem, foodpanda, Swiggy or Zomato. The **Channel Reference** field appears and is required: it holds the app's own order number, so the day's orders can be matched against the aggregator's statement.


Orders are typed in by staff. There is no connection to any aggregator: orders are not pulled from the apps and menus and prices are not pushed to them.

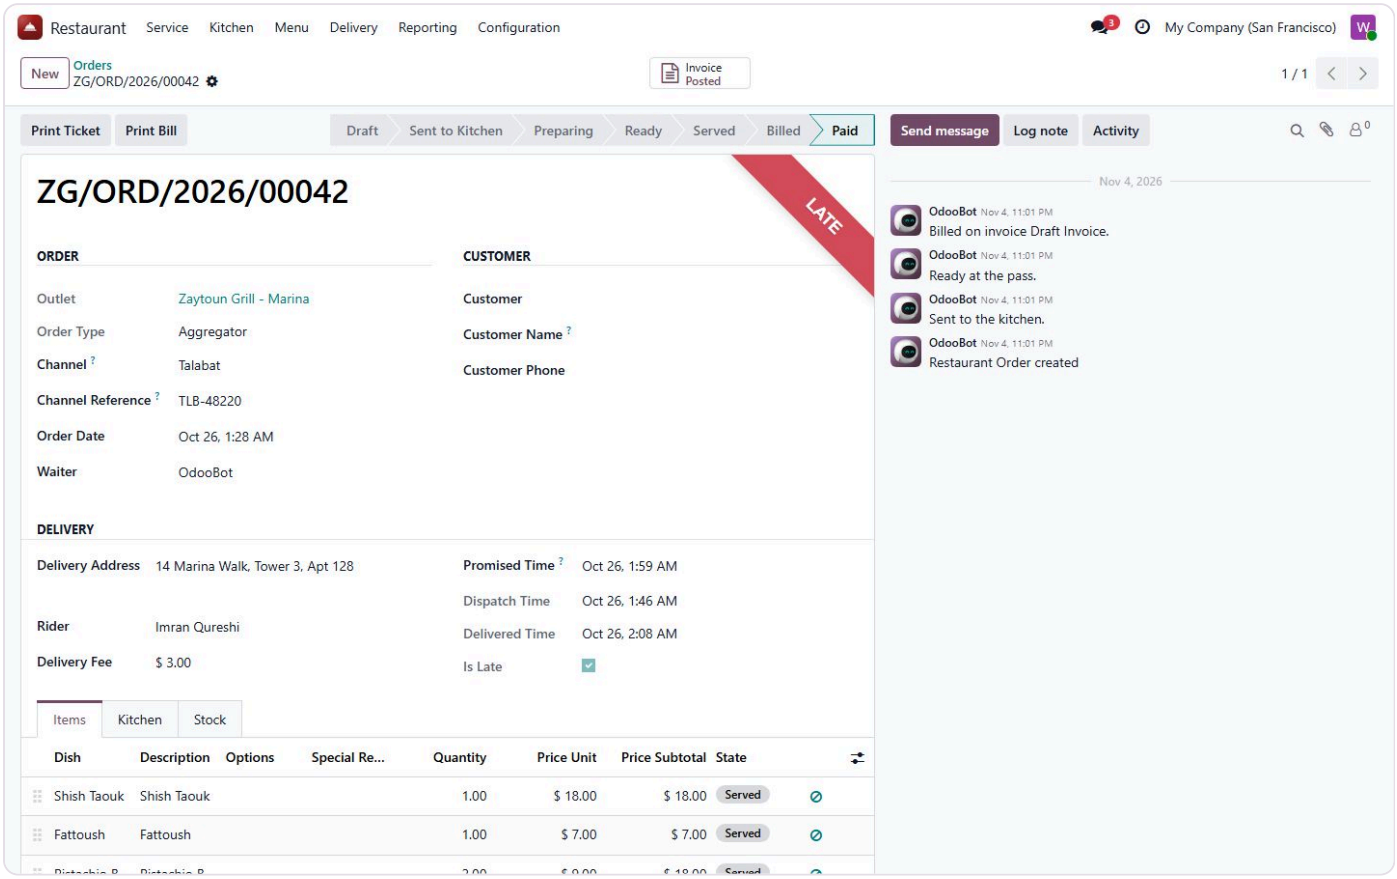

5 Orders by channel

Group the orders by Channel to see how much of the trade came through each app, the phone and the dining room.

The module records the channel but not the aggregator's commission. Commission is reconciled from the app's own statement.

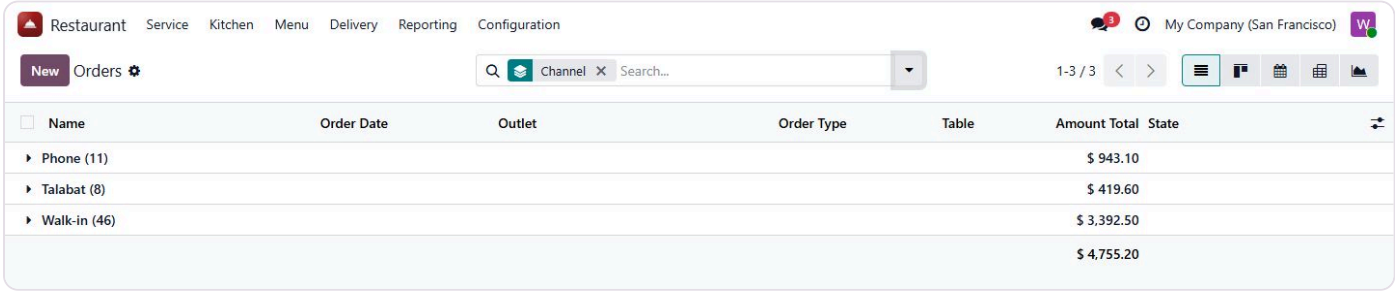


The **delivery fee** is added to the total of delivery and aggregator orders and becomes its own invoice line, using the outlet's Delivery Fee Product.

Riders

6 Delivery, Riders


Each rider with their home outlet, phone, vehicle, status, the deliveries they have open, how many they delivered today and their **On Time (%)** over their last hundred deliveries.

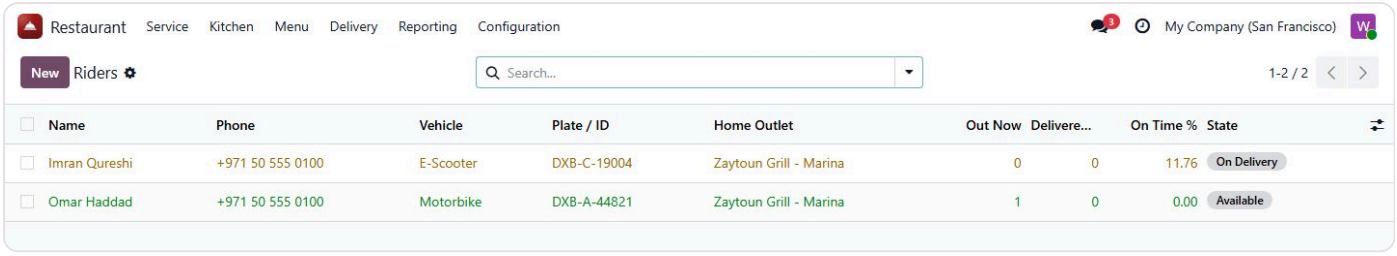

7 A rider


Vehicle (Motorbike, Bicycle, Car, E-Scooter, On Foot), **Plate / ID**, **Licence Expiry**, a contact and the **Status**: Available, On Delivery, On Break or Off Duty. The status is set by hand.

Link an **Odoo User** and give that user the Delivery Rider right, and record rules limit that login to the rider's own deliveries. Test it before rollout: the right does not include read access to outlets or menu items, which the order form shows.

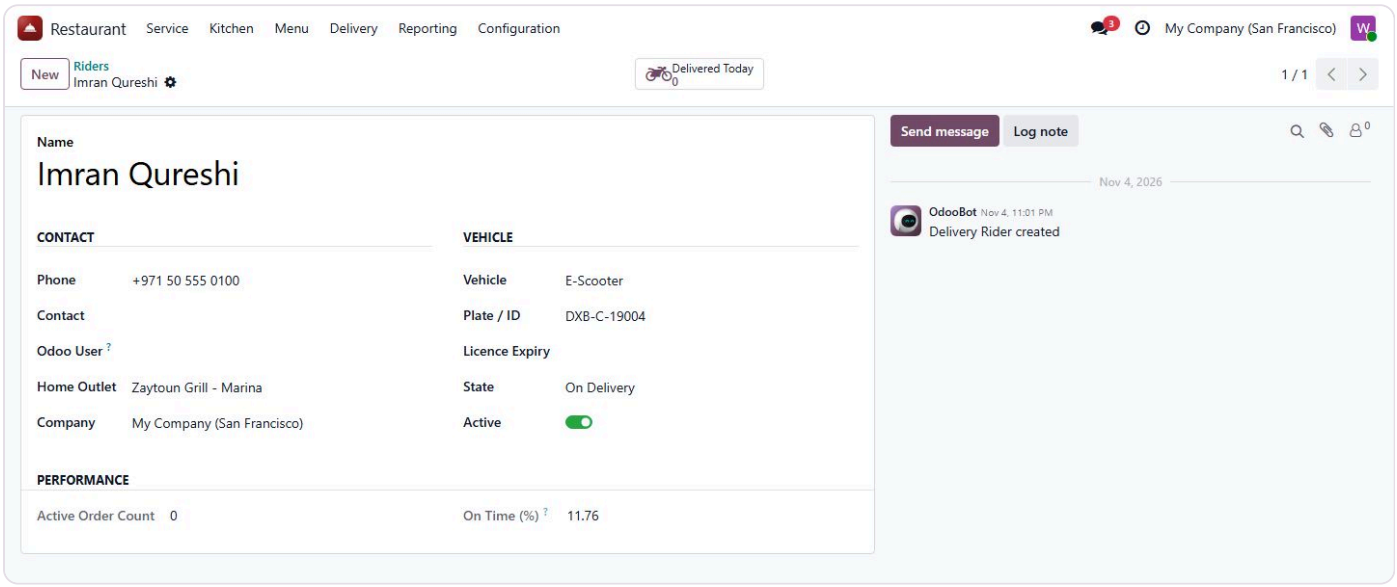

8 Deliveries

The button on the rider opens every order assigned to them.

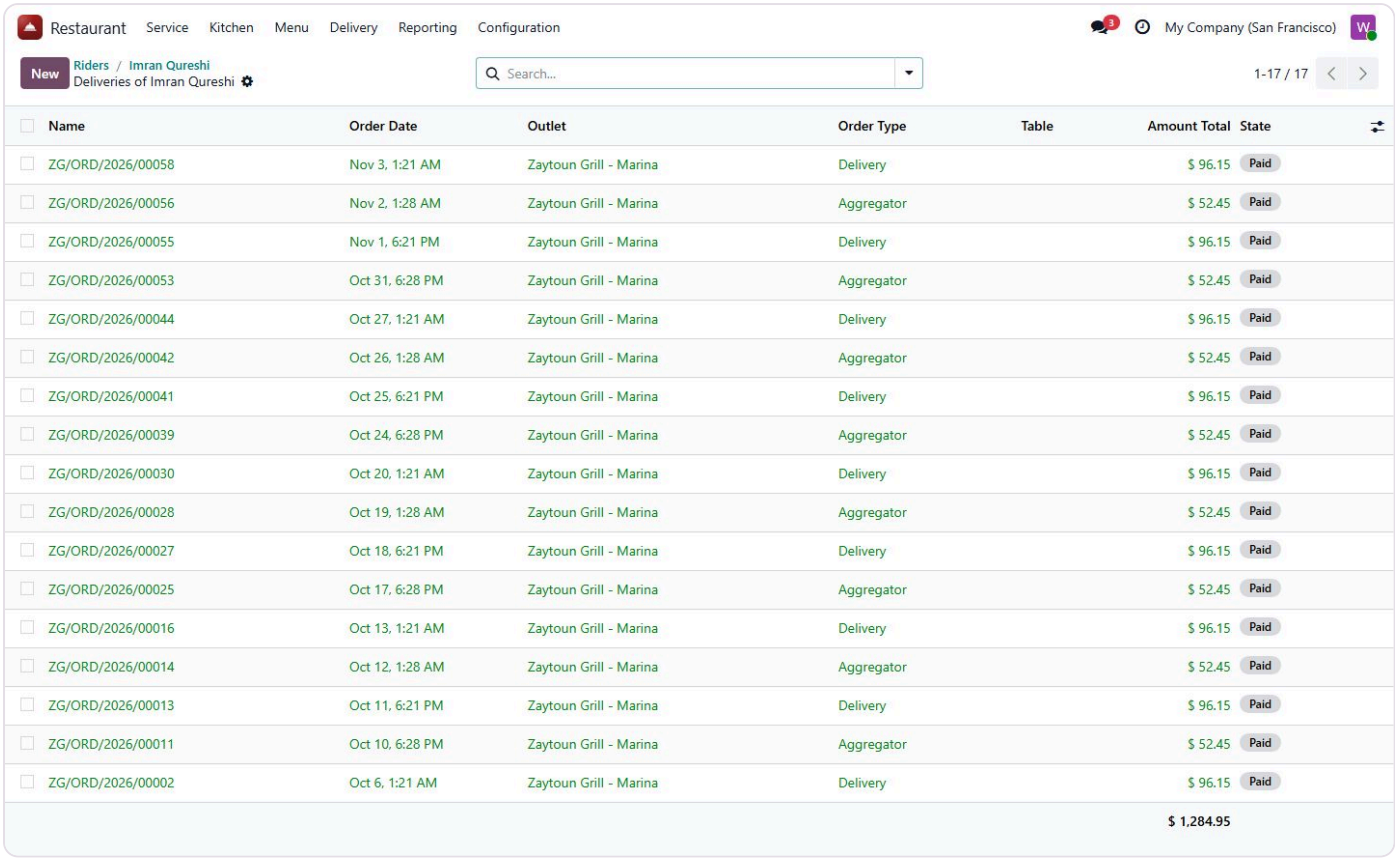

Name	Order Date	Outlet	Order Type	Table	Amount Total	State
ZG/ORD/2026/00058	Nov 3, 1:21 AM	Zaytoun Grill - Marina	Delivery		$ 96.15	Paid
ZG/ORD/2026/00056	Nov 2, 1:28 AM	Zaytoun Grill - Marina	Aggregator		$ 52.45	Paid
ZG/ORD/2026/00055	Nov 1, 6:21 PM	Zaytoun Grill - Marina	Delivery		$ 96.15	Paid
ZG/ORD/2026/00053	Oct 31, 6:28 PM	Zaytoun Grill - Marina	Aggregator		$ 52.45	Paid
ZG/ORD/2026/00044	Oct 27, 1:21 AM	Zaytoun Grill - Marina	Delivery		$ 96.15	Paid
ZG/ORD/2026/00042	Oct 26, 1:28 AM	Zaytoun Grill - Marina	Aggregator		$ 52.45	Paid
ZG/ORD/2026/00041	Oct 25, 6:21 PM	Zaytoun Grill - Marina	Delivery		$ 96.15	Paid
ZG/ORD/2026/00039	Oct 24, 6:28 PM	Zaytoun Grill - Marina	Aggregator		$ 52.45	Paid
ZG/ORD/2026/00030	Oct 20, 1:21 AM	Zaytoun Grill - Marina	Delivery		$ 96.15	Paid
ZG/ORD/2026/00028	Oct 19, 1:28 AM	Zaytoun Grill - Marina	Aggregator		$ 52.45	Paid
ZG/ORD/2026/00027	Oct 18, 6:21 PM	Zaytoun Grill - Marina	Delivery		$ 96.15	Paid
ZG/ORD/2026/00025	Oct 17, 6:28 PM	Zaytoun Grill - Marina	Aggregator		$ 52.45	Paid
ZG/ORD/2026/00016	Oct 13, 1:21 AM	Zaytoun Grill - Marina	Delivery		$ 96.15	Paid
ZG/ORD/2026/00014	Oct 12, 1:28 AM	Zaytoun Grill - Marina	Aggregator		$ 52.45	Paid
ZG/ORD/2026/00013	Oct 11, 6:21 PM	Zaytoun Grill - Marina	Delivery		$ 96.15	Paid
ZG/ORD/2026/00011	Oct 10, 6:28 PM	Zaytoun Grill - Marina	Aggregator		$ 52.45	Paid
ZG/ORD/2026/00002	Oct 6, 1:21 AM	Zaytoun Grill - Marina	Delivery		$ 96.15	Paid
					$ 1,284.95	

PART 9 The floor plan, tables and reservations

The floor plan tells the host which tables are free, booked, eating or waiting to be cleared. Reservations hold a table for a time, check it is big enough and free, and turn into an order when the guests sit.

IN THIS PART YOU WILL LEARN

- Table statuses and how orders change them
- Open Order, Needs Cleaning and Free on a table
- The QR link on each table
- A booking from draft to seated, and the double-booking check
- The confirmation email and the automatic no-show release


TRY IT YOURSELF ON THE DEMO

1. Service, Floor Plan: three tables occupied, P3 needs cleaning
2. Service, Reservations, switch to the list and open RES/2026/00001
3. Open table T3 and look at its QR Link

The floor plan

1 Service, Floor Plan


Tables grouped by floor. The badge is the status: **Free** green, **Occupied** red, **Reserved** amber, **Needs Cleaning** and **Out of Service** grey. An occupied table shows its current order.

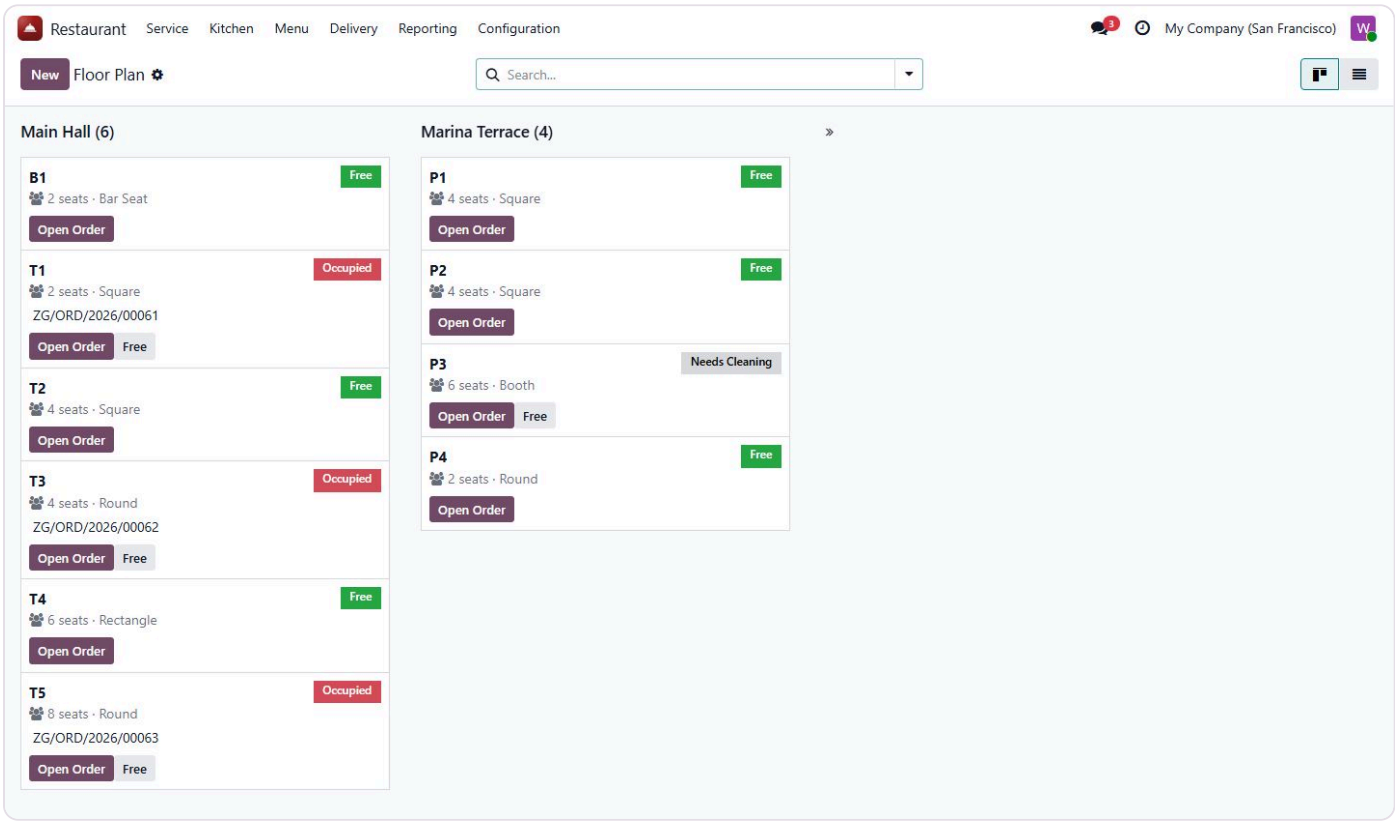

2 A table


Open Order opens the running order, or starts a new dine-in order if the table is free. **Needs Cleaning** flags it for the floor. **Free the Table** clears it.

A table cannot be freed while it carries an order that is not paid or cancelled. Bill or cancel it first.

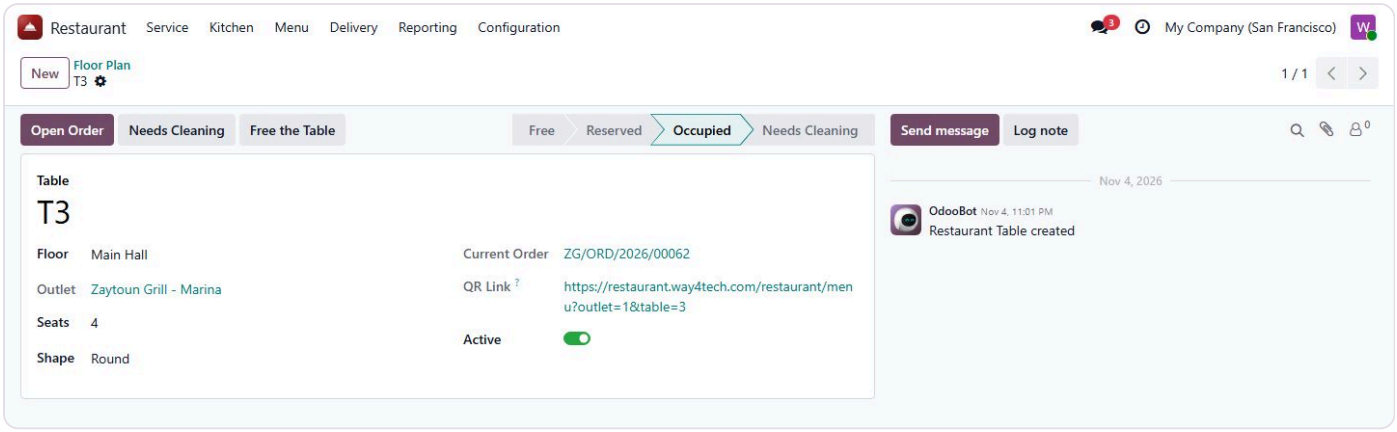


3 Needs cleaning

Paying or cancelling an order sets its table to Needs Cleaning, not Free, so a table is never offered to the next guests before it is cleared. Press Free when it is ready.

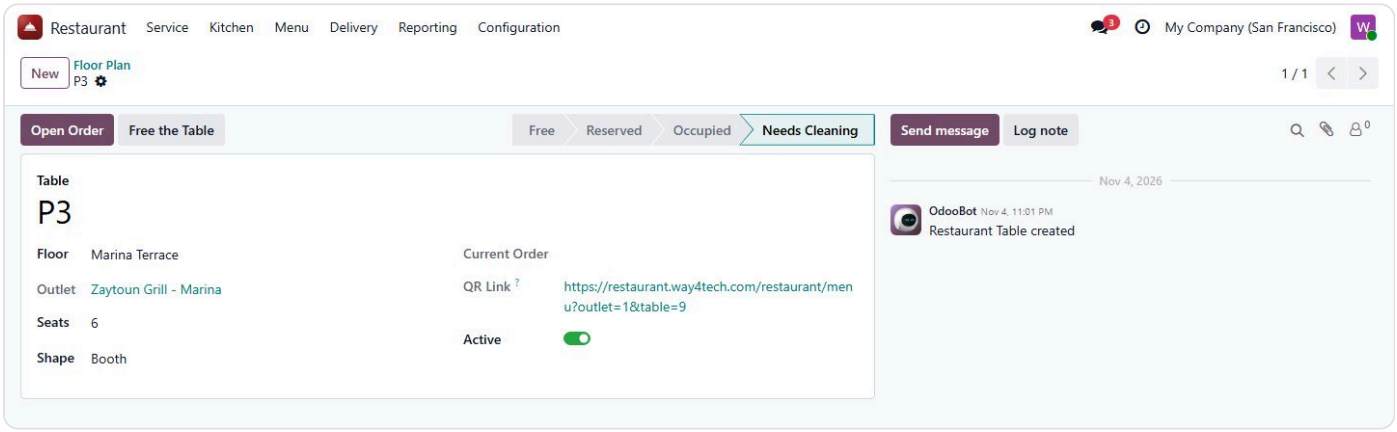


The QR link

Each table has a **QR Link** field, worked out from the Odoo address, the outlet and the table, for example `https://your-odoo/restaurant/menu?outlet=1&table=3`. It is shown on the table form and can be added as a column on the table list. The module stops there: it does not draw a QR image, and there is no page at that address, so opening it gives Odoo's page not found. Point it at your own ordering page or menu, and print the codes with any QR tool. Orders that come in that way can be given the **Table QR** channel.

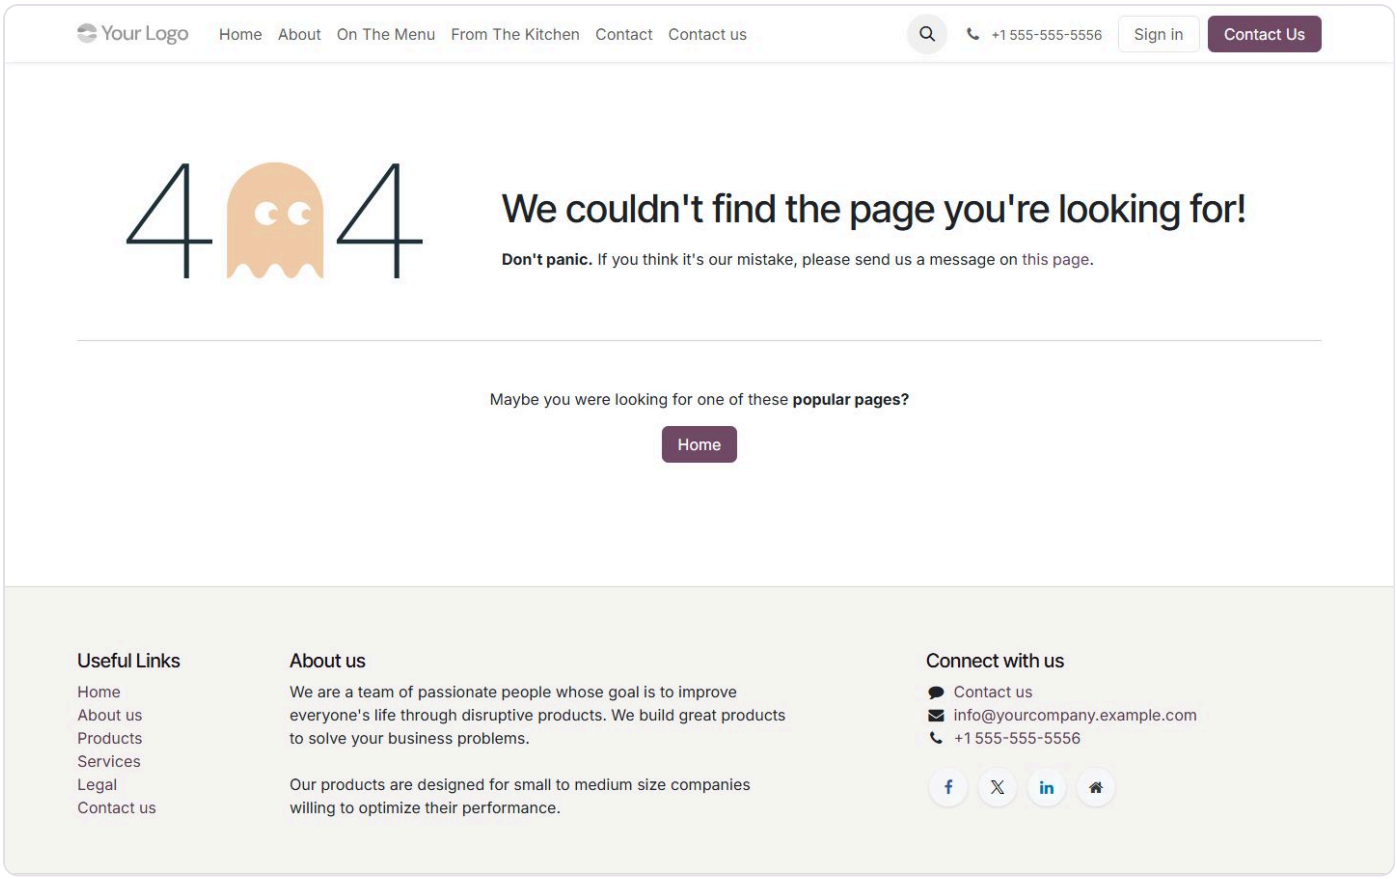

Opening a table's QR link on the demo: Odoo's page not found, because the module provides the link but not the ordering page behind it.

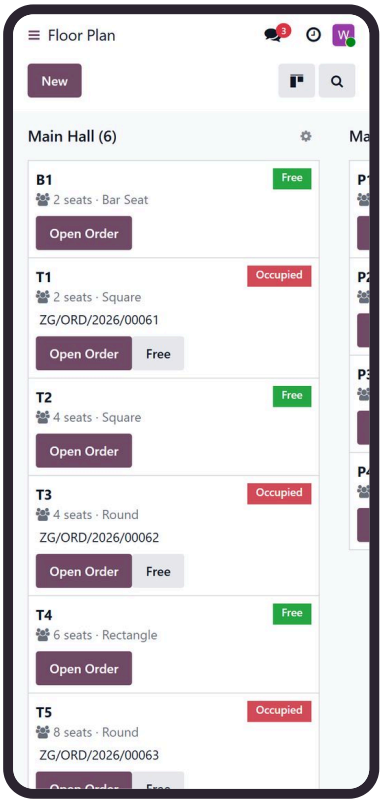


The floor plan on a phone: the host can check tables from the door.

Reservations

4 Service, Reservations


Bookings in a calendar by day, with a list view beside it. Filters show upcoming bookings, today's, those with no table yet and no-shows, and group by outlet, status, source and date.

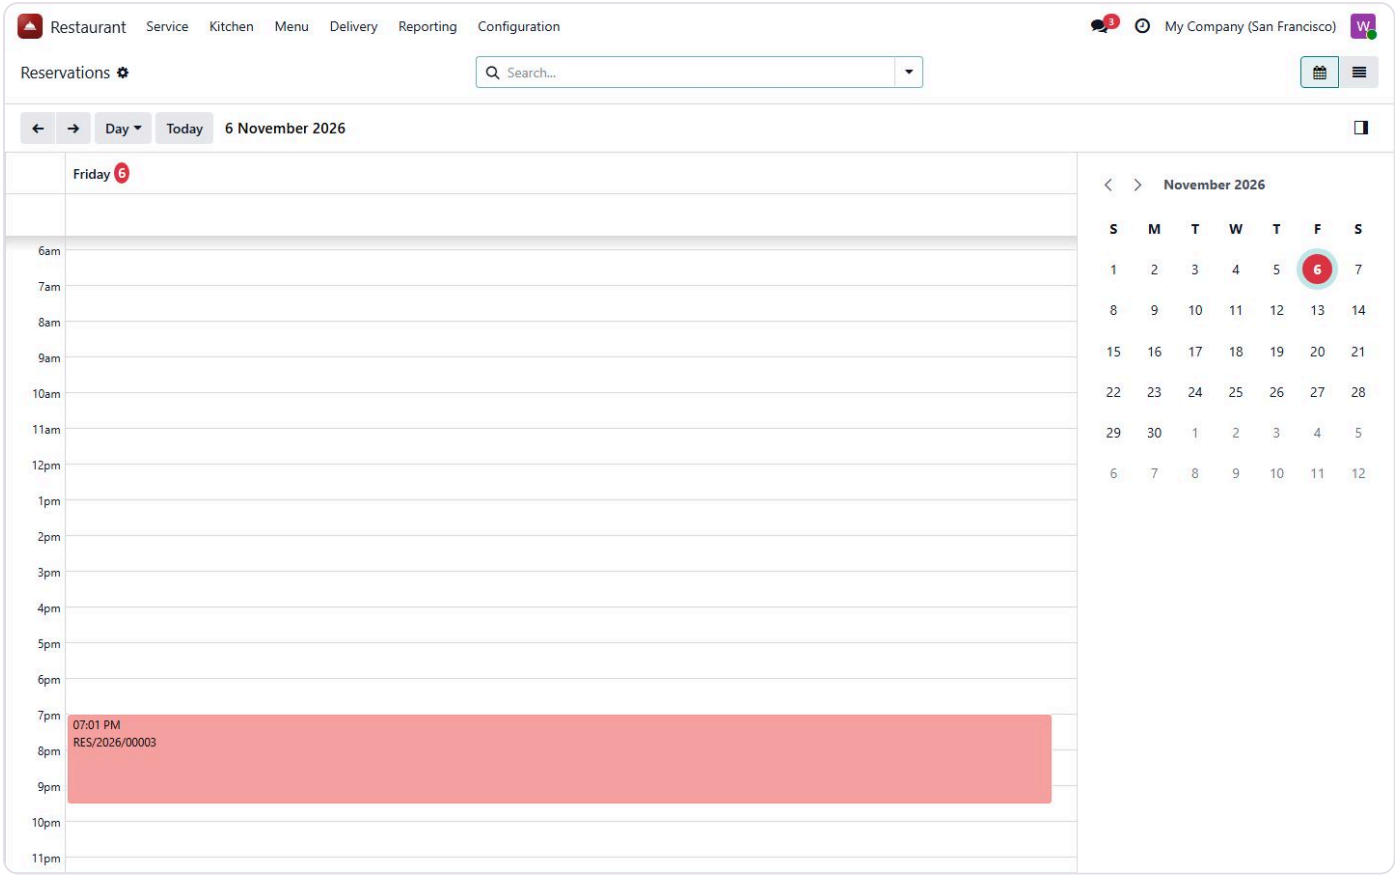

5 A new booking

Guest name (required), phone and email, or pick a saved contact to fill them. The number of **Guests**, **Reserved For** date and time, **Duration** (1.5 hours by default), the **Table** or just an **Area Preference**, the **Source** (Phone, Walk-in, Website, OpenTable, Social Media, Hotel Concierge, Other), the **Occasion** and a **Deposit**.


The deposit is a note for the host. It does not post to accounting.

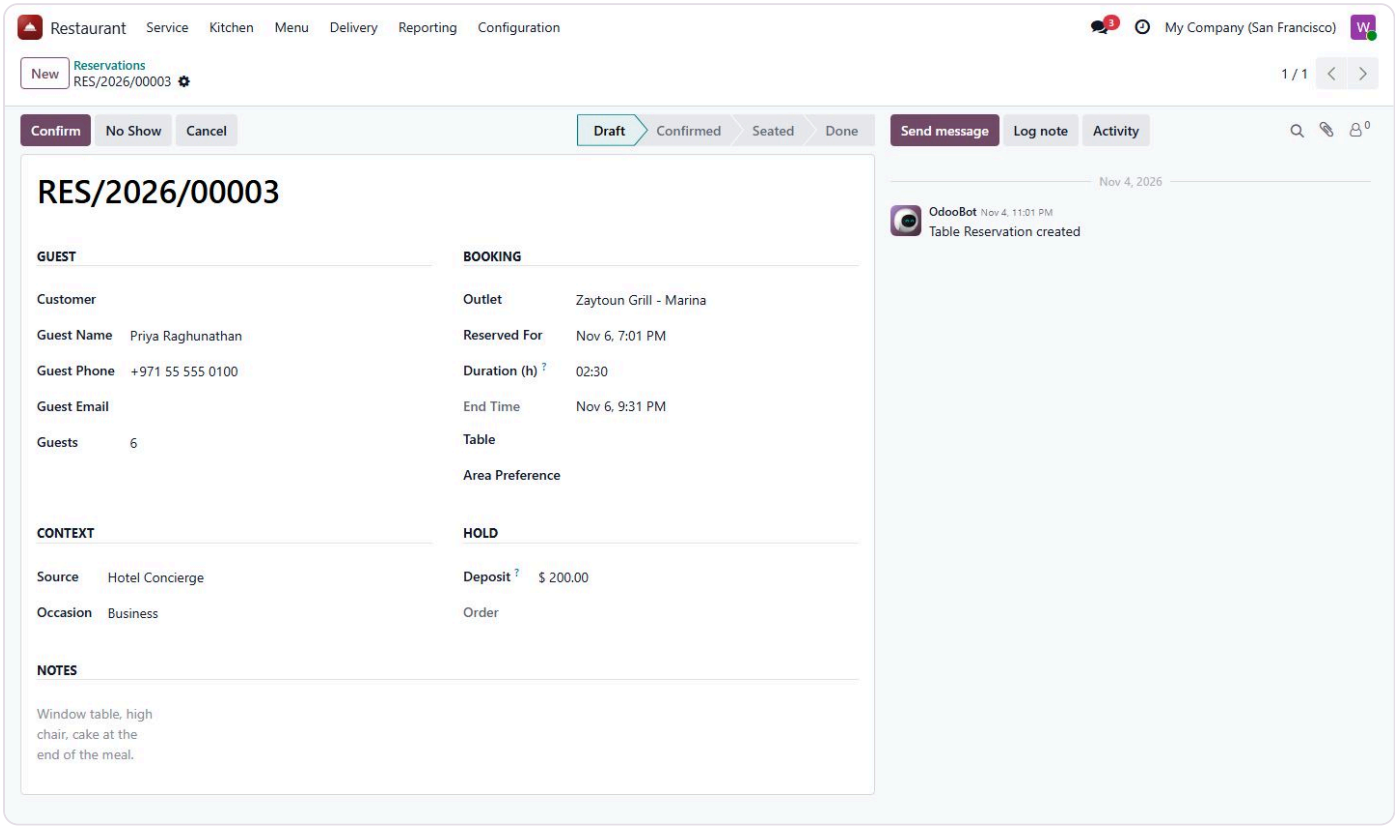

6 Confirm and email

Confirm moves the booking to Confirmed and marks a free table Reserved. **Email the Guest** sends the Reservation Confirmed email with the reference, time, guests and table, and logs it in the chatter.

A booking cannot hold a table that is already held for an overlapping time, and cannot hold more guests than the table seats. Both are refused with a message naming the clash.

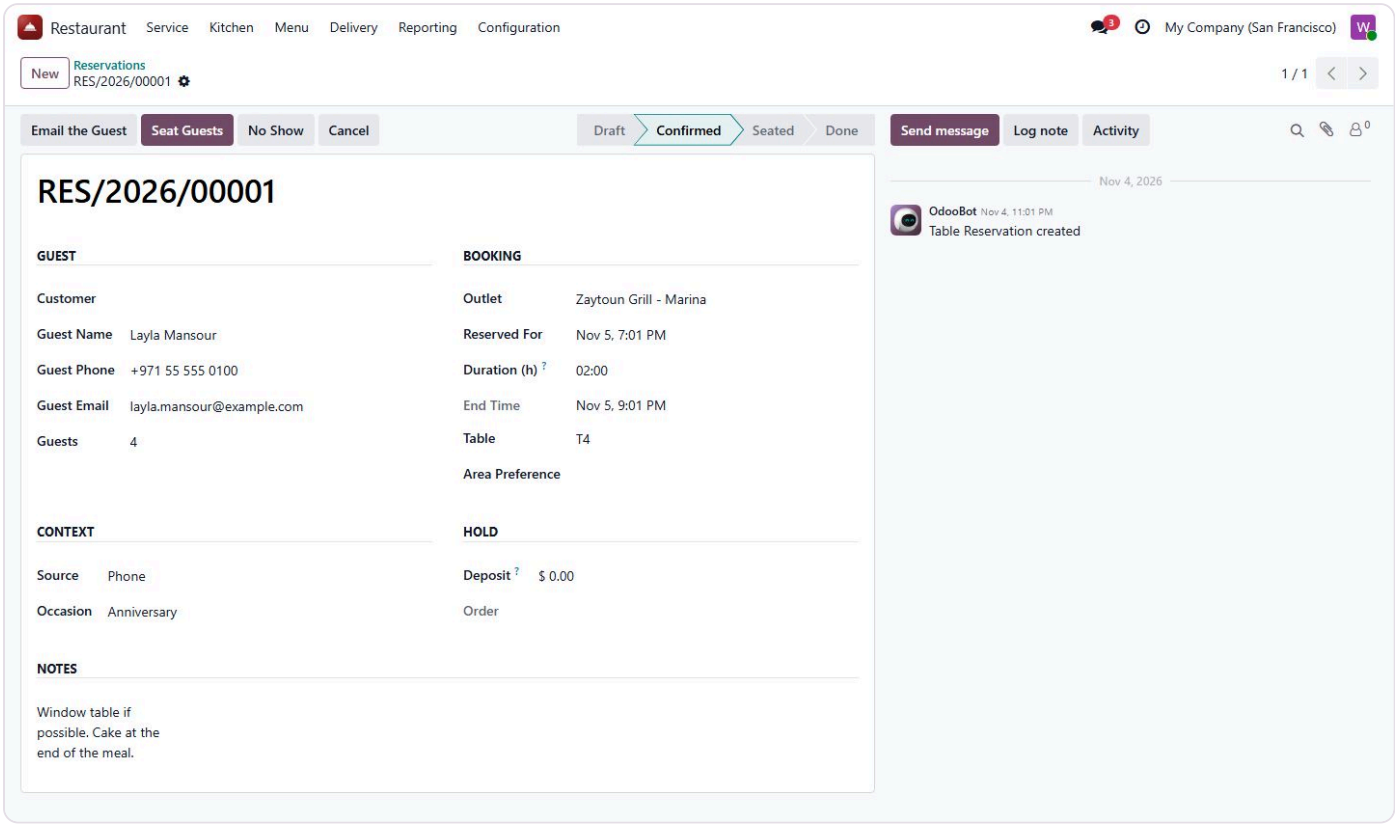

7 Seat the guests

Seat Guests needs a table. It marks the booking Seated, opens a dine-in order on that table with the guest count and the guest's name and phone, and links the two. **Close** marks the booking done once they have left.

8 No shows

No Show and **Cancel** release a reserved table. A scheduled action, **Restaurant: release no-show reservations**, runs every 15 minutes and marks as no-show any draft or confirmed booking whose time has passed by more than the company's grace period.

There is no waitlist and no public booking page in this version. Bookings are entered by staff. A booking from a website or OpenTable is typed in and given that source.

PART 10 The bill, the service charge and the invoice

The bill is where the kitchen's work turns into money. In this module every bill is backed by a normal Odoo customer invoice, so accounts see restaurant sales in the same place as everything else.

IN THIS PART YOU WILL LEARN

- How the total is built: lines, discount, service charge, delivery fee, tax
- Tips, and why they are not revenue
- Bill: the draft invoice and the Walk-in Guest
- Mark Paid: posting the invoice and releasing the table
- The fiscal block on the bill: ZATCA QR, GSTIN or VAT

TRY IT YOURSELF ON THE DEMO

1. Open ZG/ORD/2026/00050, a paid dine-in order
2. Press the Invoice button at the top and read the invoice lines
3. Back on the order, print the bill (Part 13 shows it)

How the total is built

HOW IT WORKS

The order total

Lines	quantity × (price + options) less the line discount, excluding void lines
– Discount	a flat amount off the whole bill, with a reason
+ Service charge	dine-in only: the outlet's % of the untaxed amount after discount
+ Tax	the taxes of each line
+ Delivery fee	delivery and aggregator orders only
= Total	**shown on the order and the bill**; the tip is recorded under it


The **Discount** field under the lines takes an amount, and a **discount reason** field appears once it is filled. A discount cannot be larger than the order. The **Tip** is recorded for the staff tip pool and printed on the bill, but it is not part of the total and is not invoiced, because it is not restaurant revenue.

Bill and Mark Paid

1 A paid order

Bill appears once the order is ready or served. It creates a draft customer invoice and moves the order to **Billed**. **Mark Paid** then posts that invoice, moves the order to **Paid** and sets the table to needs cleaning. Mark Paid also bills first if nobody did. The Invoice button at the top opens the invoice with its status.


An order is billed once. Billing a draft or cancelled order is refused, and so is billing an order whose outlet charges a service fee or delivery fee without a product for it.

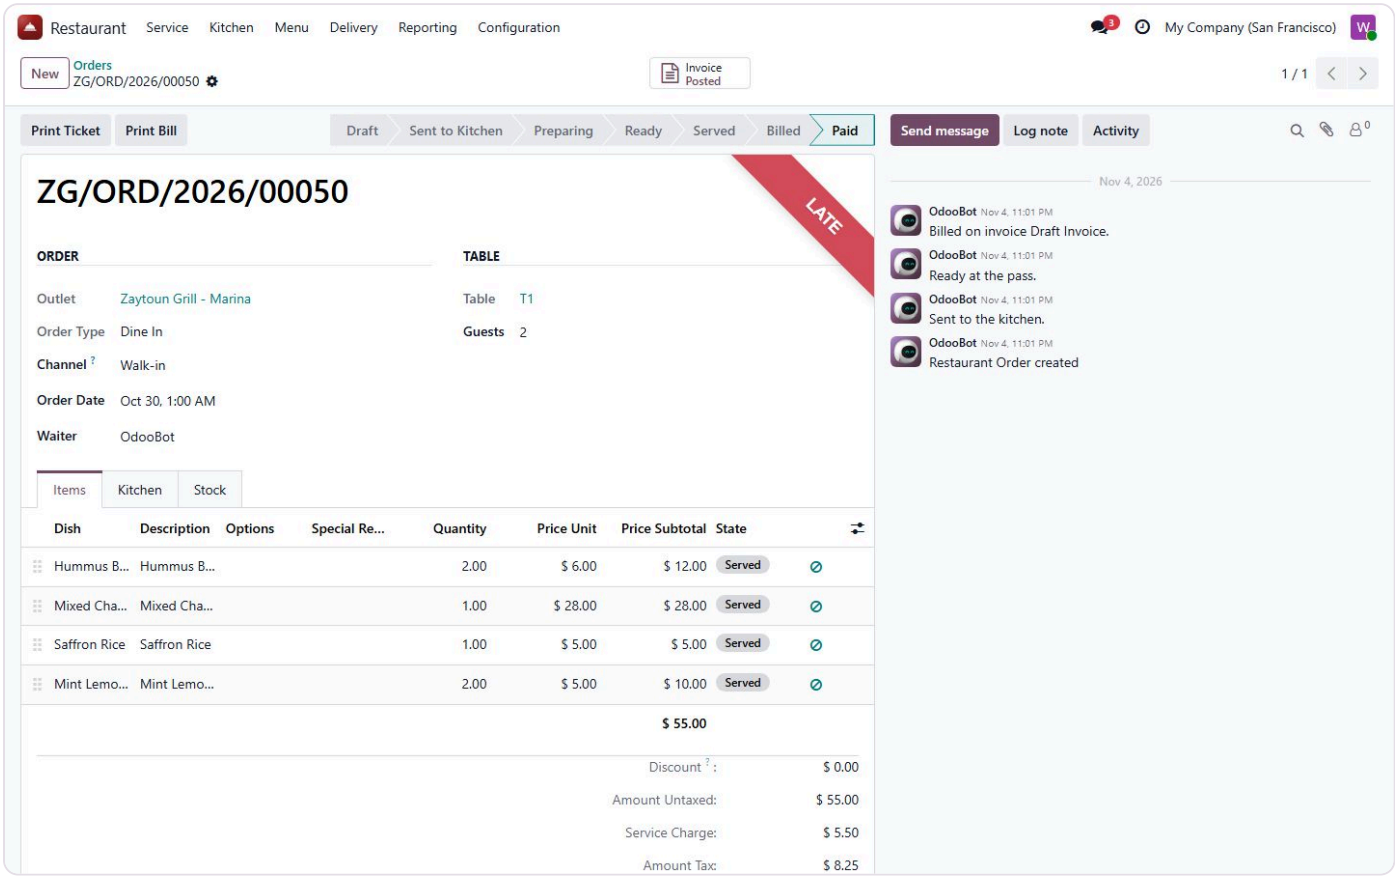

2 The invoice

One line per dish (with its options and special request in the label), then a Discount line, a **Service Charge** line such as Service Charge 10.00% and a Delivery line, each on the products set on the outlet. The customer is the order's contact or, for a cash guest, the shared **Walk-in Guest** contact, so a busy night does not leave hundreds of one-off contacts behind. The outlet's journal and fiscal position are used if set.

Replace Walk-in Guest with the guest's own contact before billing when they want an invoice in their name.

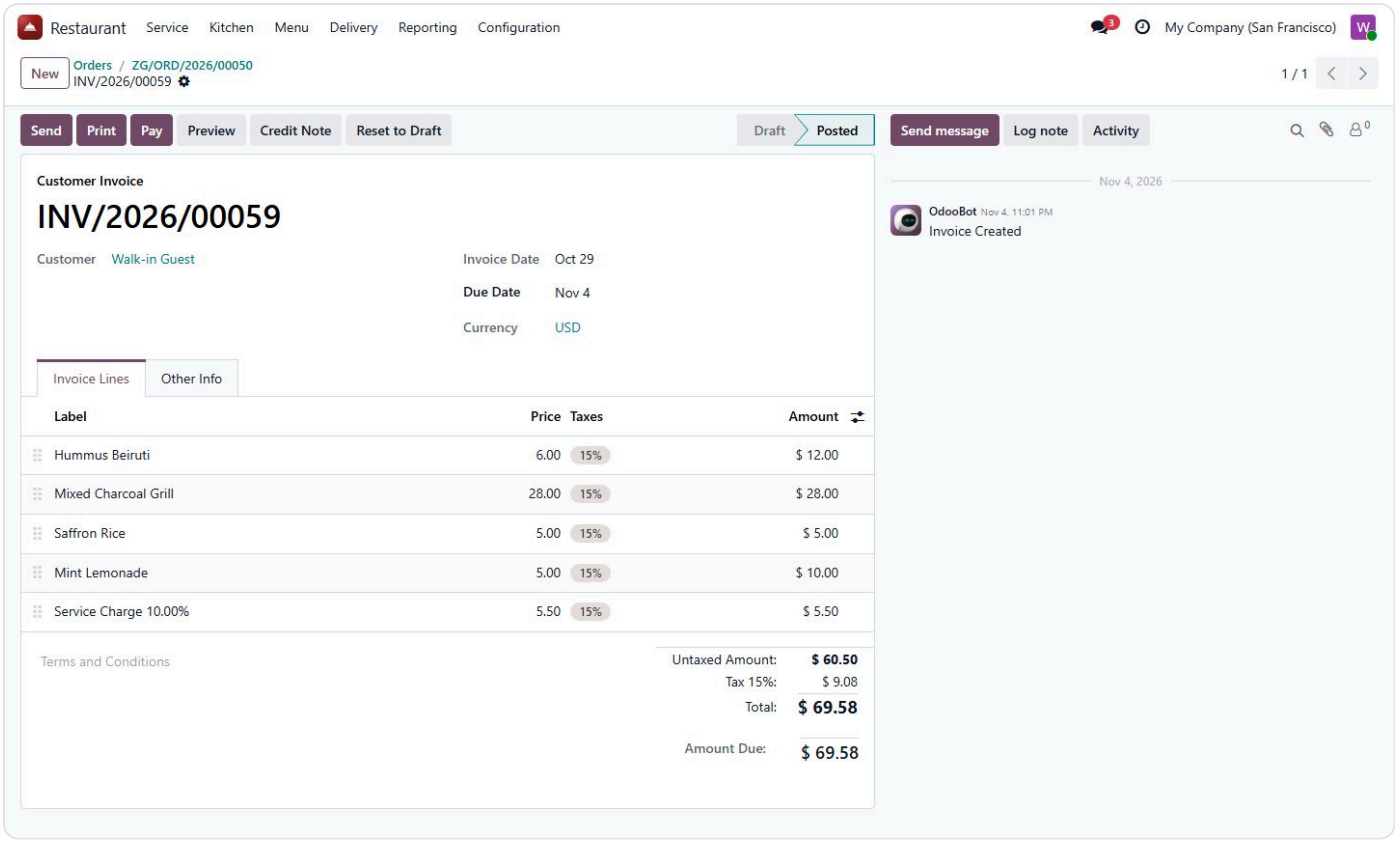

Three things to know before you go live. First, Mark Paid posts the invoice but does not register a payment: the invoice stays unpaid in Invoicing until the cash or card is recorded there, as on the demo, where the posted invoice still shows Pay. Second, the service charge and discount lines take the taxes of the service charge product, while the order works its tax out on the dishes only, so if that product is taxed the invoice total can be a little higher than the order total. On the demo, order 00050 totals 68.75 and its invoice 69.58. Third, the kitchen note is copied into the invoice's terms field, so keep allergy notes off an order that will be invoiced to a company.

The fiscal block

Each outlet chooses what the bill prints for the tax authority, under **Receipt Fiscal Block** on its Billing tab:

CHOICE	WHAT IS PRINTED
None	The tax registration number, if one is entered, labelled VAT.
Saudi Arabia - ZATCA TLV	A QR code holding five tagged values in base64: seller name, VAT number, time, total and VAT. This is the simplified-invoice QR layout; the module does not sign invoices or report them to ZATCA.
India - GSTIN block	The GSTIN printed in plain text.
EU - VAT summary	The VAT registration printed in plain text.

> For full ZATCA Phase 2 (signed XML, cryptographic stamp, clearance and reporting) the customer invoice has to go through a ZATCA e-invoicing integration. This module's QR is the printed code on the bill only.

PART 11 Ingredients out of stock, and the wastage log

A kitchen's stock goes down two ways: into plates and into the bin. The module records both, so the shelf count in Inventory matches the shelf.

IN THIS PART YOU WILL LEARN

- What Send to Kitchen moves out of stock, and from where
- The Stock tab on an order and the return on cancel
- What happens when the stock cannot be moved
- Logging wastage with a reason, its cost, and Post to Stock

TRY IT YOURSELF ON THE DEMO


1. Open ZG/ORD/2026/00050 and its Stock tab
2. Kitchen, Wastage, open WST/2026/00001, the soft tomatoes
3. Switch the wastage list to the pivot view

Consumption from the recipe

1 The Stock tab

When an order is sent to the kitchen, and the outlet has Consume Ingredients on and a Kitchen Stock Location set, the module creates one stock move per ingredient per dish (recipe quantity × dishes ordered) from that location to Customers, and validates them at once. They are listed on the order's Stock tab.

Cancelling the order creates the return moves and validates them, so the ingredients are back on the shelf.

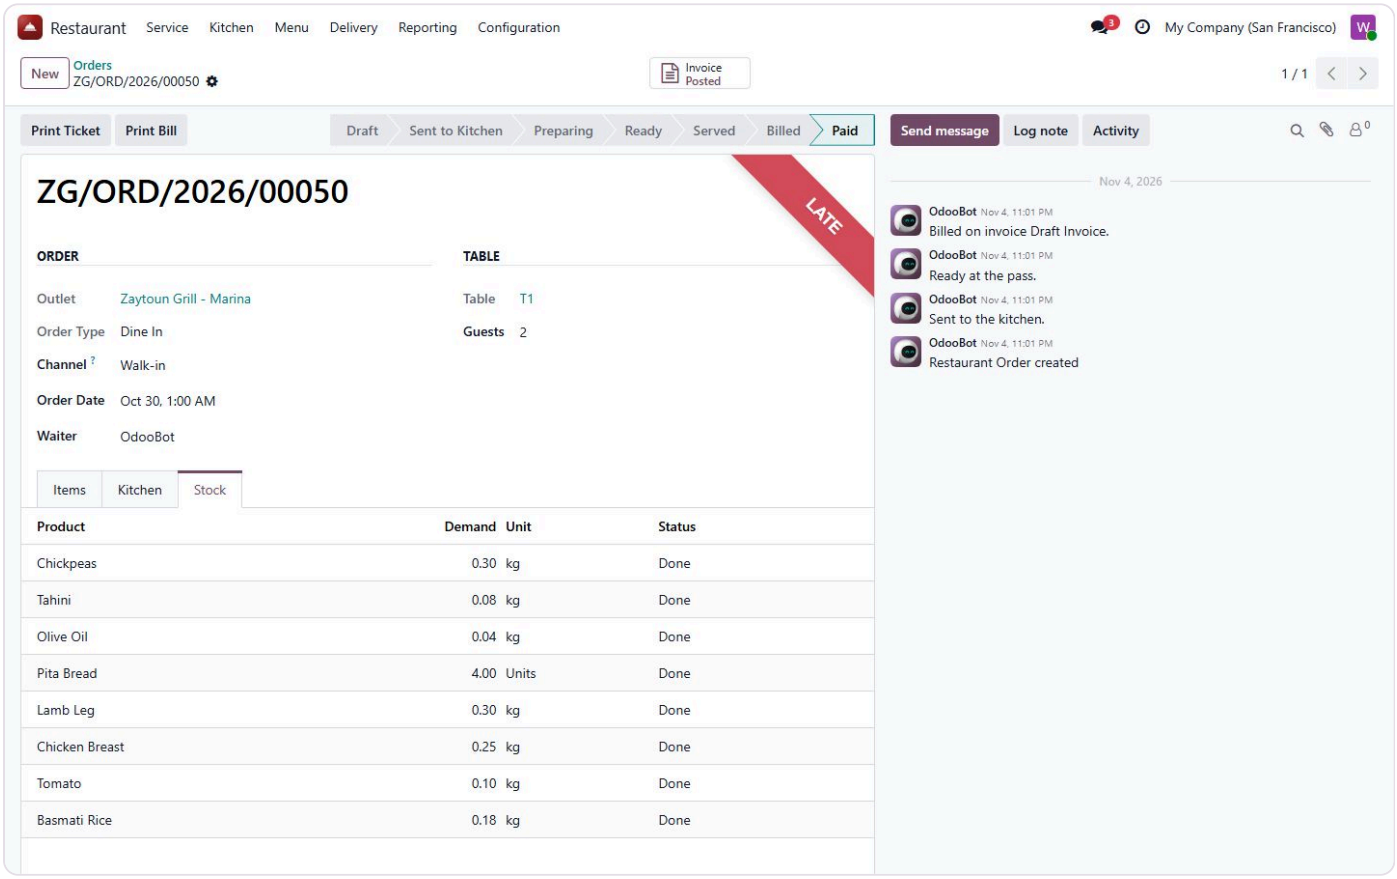

2 If stock cannot move


A stock problem never stops food leaving the kitchen. If the moves cannot be validated, they are removed and the order carries a message in its chatter saying the ingredients were not taken out of stock and why, for the manager to correct.

Only the recipe of the dish is consumed. A modifier option's Consumes product is stored but not taken out of stock in this version.

Wastage

3 Kitchen, Wastage


Every wastage entry with its date, outlet, product, quantity, reason, cost and status. Filters for draft, posted and this month; groups by reason, outlet, product and date.

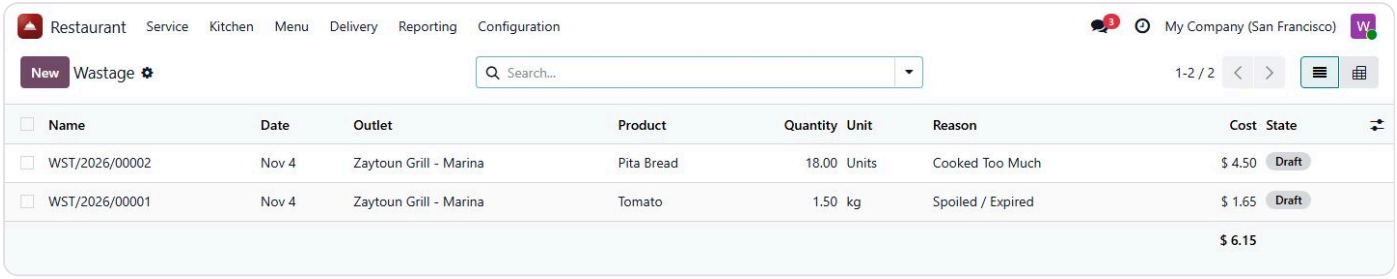

4 A wastage entry


Date, outlet, the **Product** (a goods product), **Quantity** and **Unit**, and the **Reason**: Spoiled / Expired, Dropped or Broken, Cooked Too Much, Staff Meal, Remade for a Guest, Training or Other, with a note. The **Cost** is the quantity at the product's cost price, and **Logged By** is the user who entered it.

Post to Stock creates and validates an Odoo scrap from the outlet's kitchen stock location and links it. It needs that location to be set. A posted entry cannot be cancelled: correct it with an inventory adjustment.

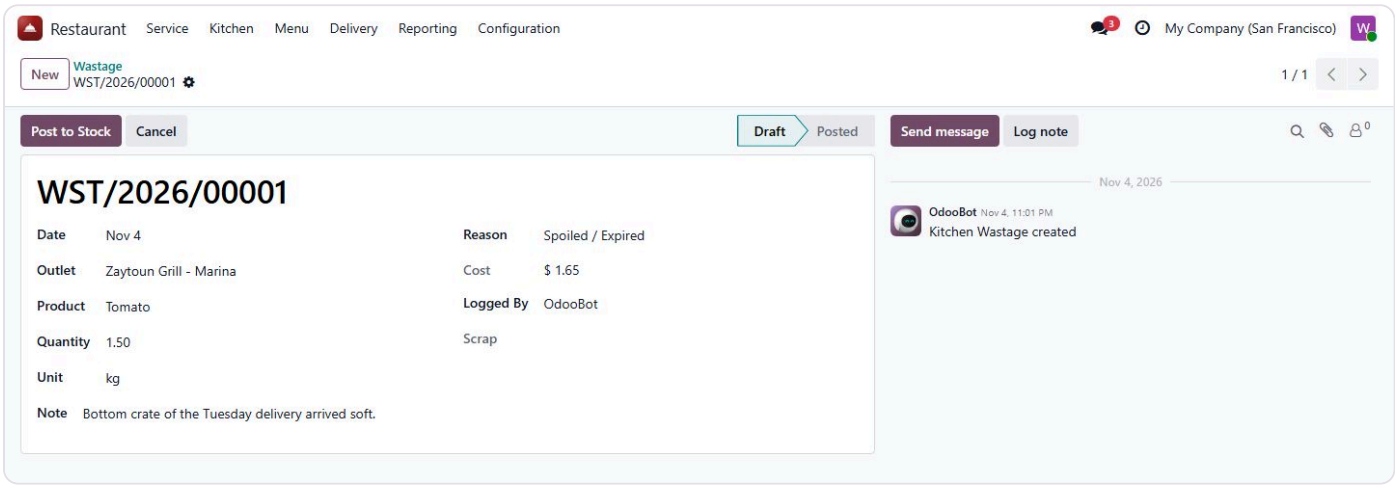

5 Wastage by reason

The pivot view adds up quantity and cost, so a manager can see what was thrown away and why over a month.

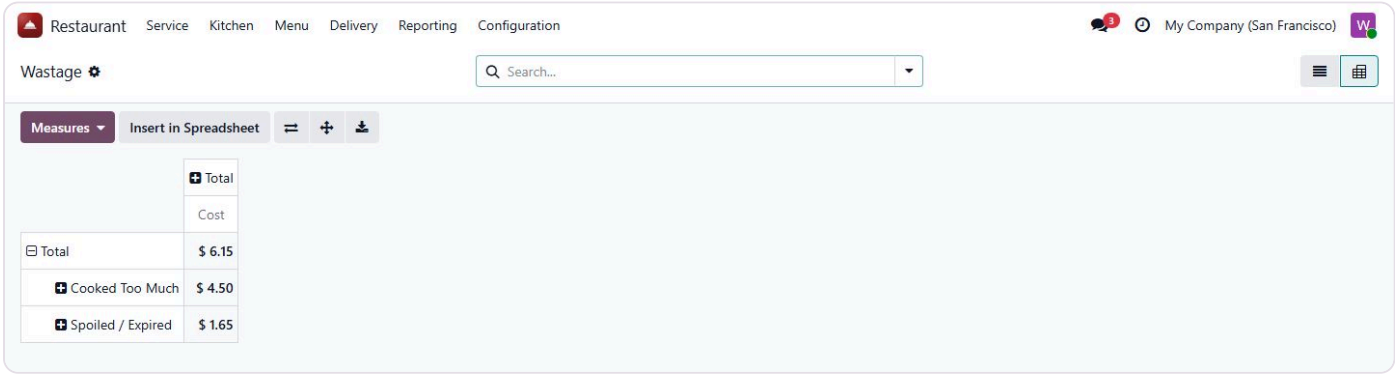

PART 12 Reporting and menu engineering

Two questions matter at the end of a month: where did the money come from, and which dishes earn their place on the menu. Reporting answers the first, Menu Engineering the second.

IN THIS PART YOU WILL LEARN

- Sales by outlet, type, channel, waiter and date
- Dishes by category, station and course
- The four menu engineering grades and how they are worked out
- When the grades are refreshed


TRY IT YOURSELF ON THE DEMO

1. Reporting, Sales: the pivot by outlet and order type
2. Reporting, Dishes
3. Menu, Menu Engineering, grouped by grade

Sales

1 Reporting, Sales


Billed and paid orders, as a pivot of outlets against order types, untaxed and total. Expand a row or a column by channel, waiter, rider, status or date (down to the hour) to see sales by hour of day.

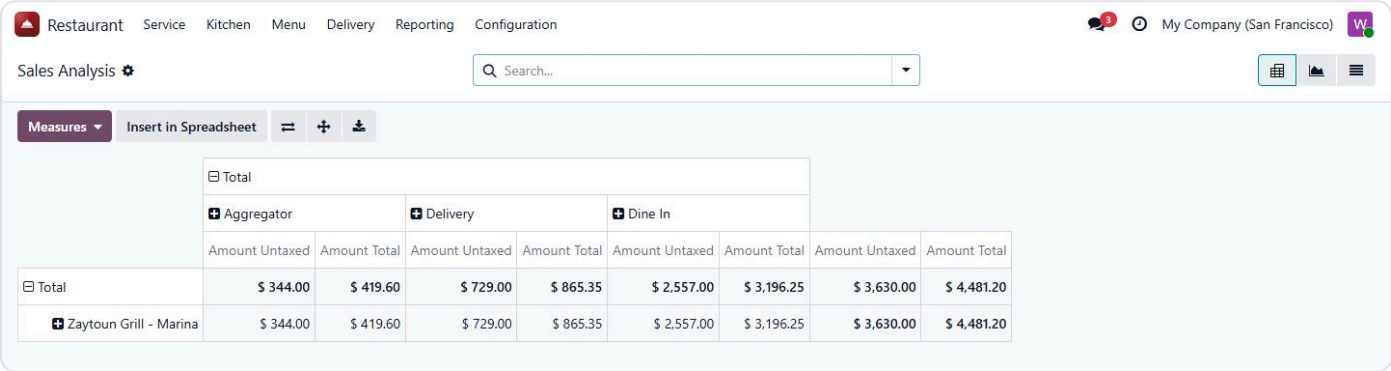


	Total							
	Aggregator		Delivery		Dine In			
	Amount Untaxed	Amount Total	Amount Untaxed	Amount Total	Amount Untaxed	Amount Total	Amount Untaxed	Amount Total
Total	$ 344.00	$ 419.60	$ 729.00	$ 865.35	$ 2,557.00	$ 3,196.25	$ 3,630.00	$ 4,481.20
Zaytoun Grill - Marina	$ 344.00	$ 419.60	$ 729.00	$ 865.35	$ 2,557.00	$ 3,196.25	$ 3,630.00	$ 4,481.20

2 Sales over time

The graph view plots the total by day.

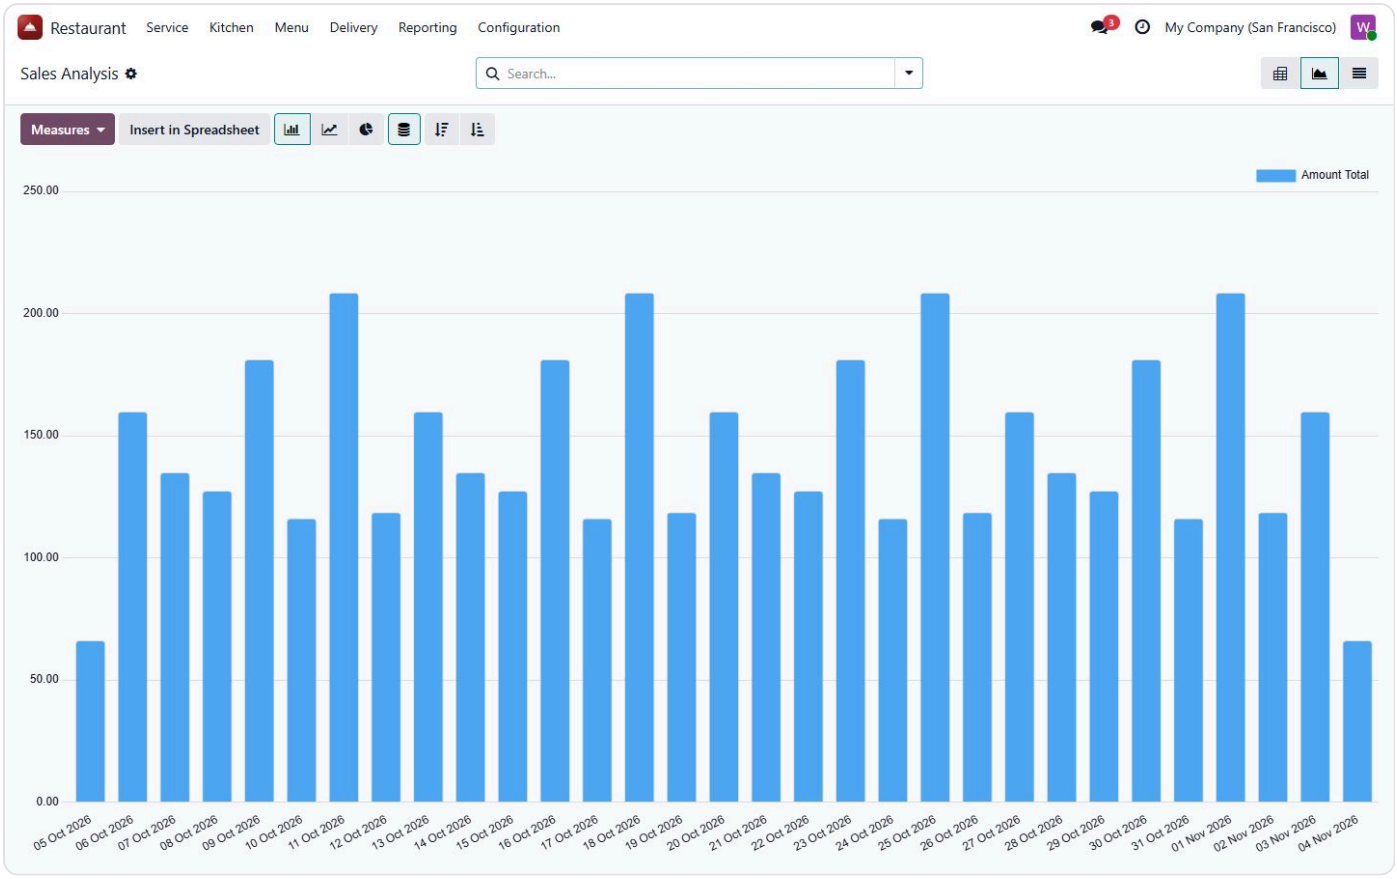

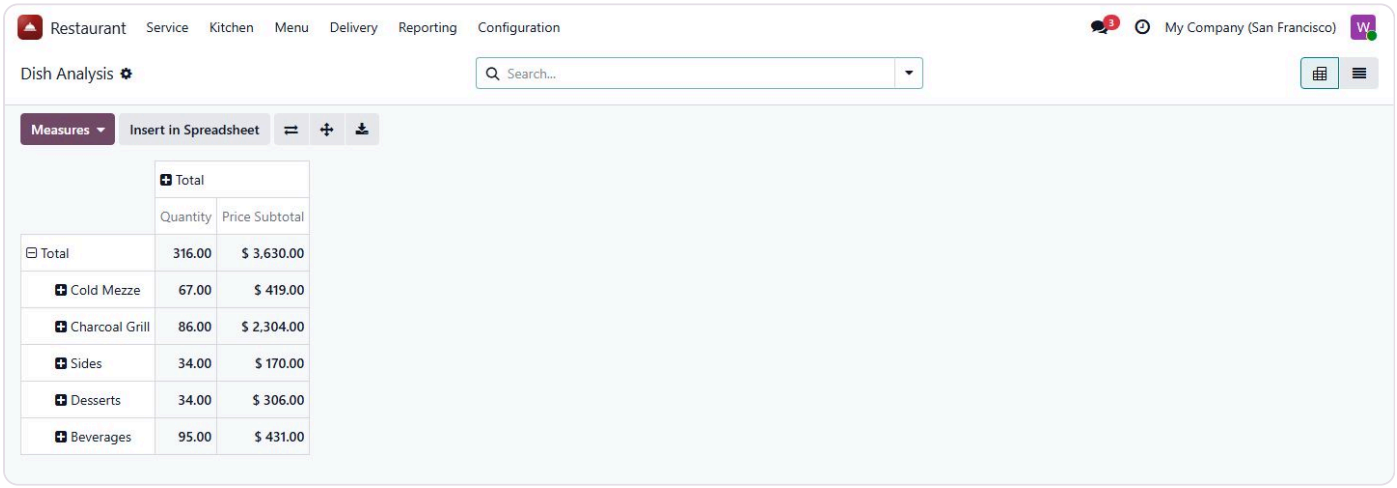

Reporting, Dishes: billed and paid order lines by category, with quantity and amount. Regroup by station, course or order type.

Menu engineering


Menu engineering sorts each dish by two questions: does it sell more than the average dish, and does it earn more margin than the average dish? The module looks at billed and paid orders of the last 90 days.

GRADE	SELLS	EARNS	WHAT TO DO
Star	Above average	Above average	Keep it, feature it, protect the recipe
Plough Horse	Above average	Below average	Popular but cheap to the guest: reprice or trim the portion cost
Puzzle	Below average	Above average	Earns well, nobody orders it: move it, rename it, recommend it
Dog	Below average	Below average	Take it off the menu

3 Menu, Menu Engineering

Every dish grouped by grade, with price, recipe cost, margin and food cost. Each dish's form shows its grade, the quantity and revenue of the last 90 days and when it was last analysed.

Dishes that sold nothing in the period get no grade. On the demo the grades are worked out on the inflated costs described in Part 5, so the grades are right relative to each other but the margins are not.

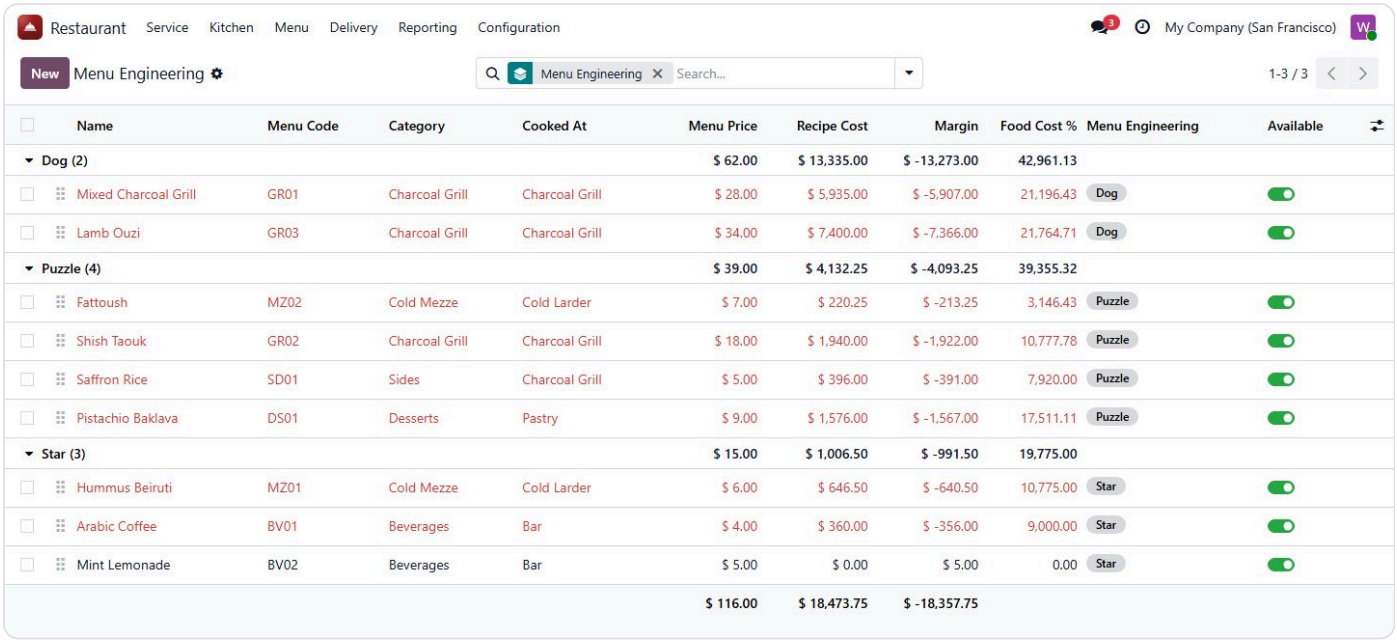


Name	Menu Code	Category	Cooked At	Menu Price	Recipe Cost	Margin	Food Cost %	Menu Engineering	Available
Dog (2)				**$ 62.00**	**$ 13,335.00**	**$ -13,273.00**	**42,961.13**		
Mixed Charcoal Grill	GR01	Charcoal Grill	Charcoal Grill	$ 28.00	$ 5,935.00	$ -5,907.00	21,196.43	Dog	
Lamb Ouzi	GR03	Charcoal Grill	Charcoal Grill	$ 34.00	$ 7,400.00	$ -7,366.00	21,764.71	Dog	
Puzzle (4)				**$ 39.00**	**$ 4,132.25**	**$ -4,093.25**	**39,355.32**		
Fattoush	MZ02	Cold Mezze	Cold Larder	$ 7.00	$ 220.25	$ -213.25	3,146.43	Puzzle	
Shish Taouk	GR02	Charcoal Grill	Charcoal Grill	$ 18.00	$ 1,940.00	$ -1,922.00	10,777.78	Puzzle	
Saffron Rice	SD01	Sides	Charcoal Grill	$ 5.00	$ 396.00	$ -391.00	7,920.00	Puzzle	
Pistachio Baklava	DS01	Desserts	Pastry	$ 9.00	$ 1,576.00	$ -1,567.00	17,511.11	Puzzle	
Star (3)				**$ 15.00**	**$ 1,006.50**	**$ -991.50**	**19,775.00**		
Hummus Beiruti	MZ01	Cold Mezze	Cold Larder	$ 6.00	$ 646.50	$ -640.50	10,775.00	Star	
Arabic Coffee	BV01	Beverages	Bar	$ 4.00	$ 360.00	$ -356.00	9,000.00	Star	
Mint Lemonade	BV02	Beverages	Bar	$ 5.00	$ 0.00	$ 5.00	0.00	Star	
				$ 116.00	**$ 18,473.75**	**$ -18,357.75**			


The averages only mean something across the whole menu, so the grades are refreshed for every dish together: by the scheduled action **Restaurant: refresh menu engineering** once a day, or at once with the refresh button on a dish's form, which reports how many dishes were reclassified.

PART 13 Printed documents

Two documents, both laid out for an 80 mm thermal roll: the kitchen ticket and the customer bill. Both print from the order, with Print Ticket, Print Bill or the Print menu.

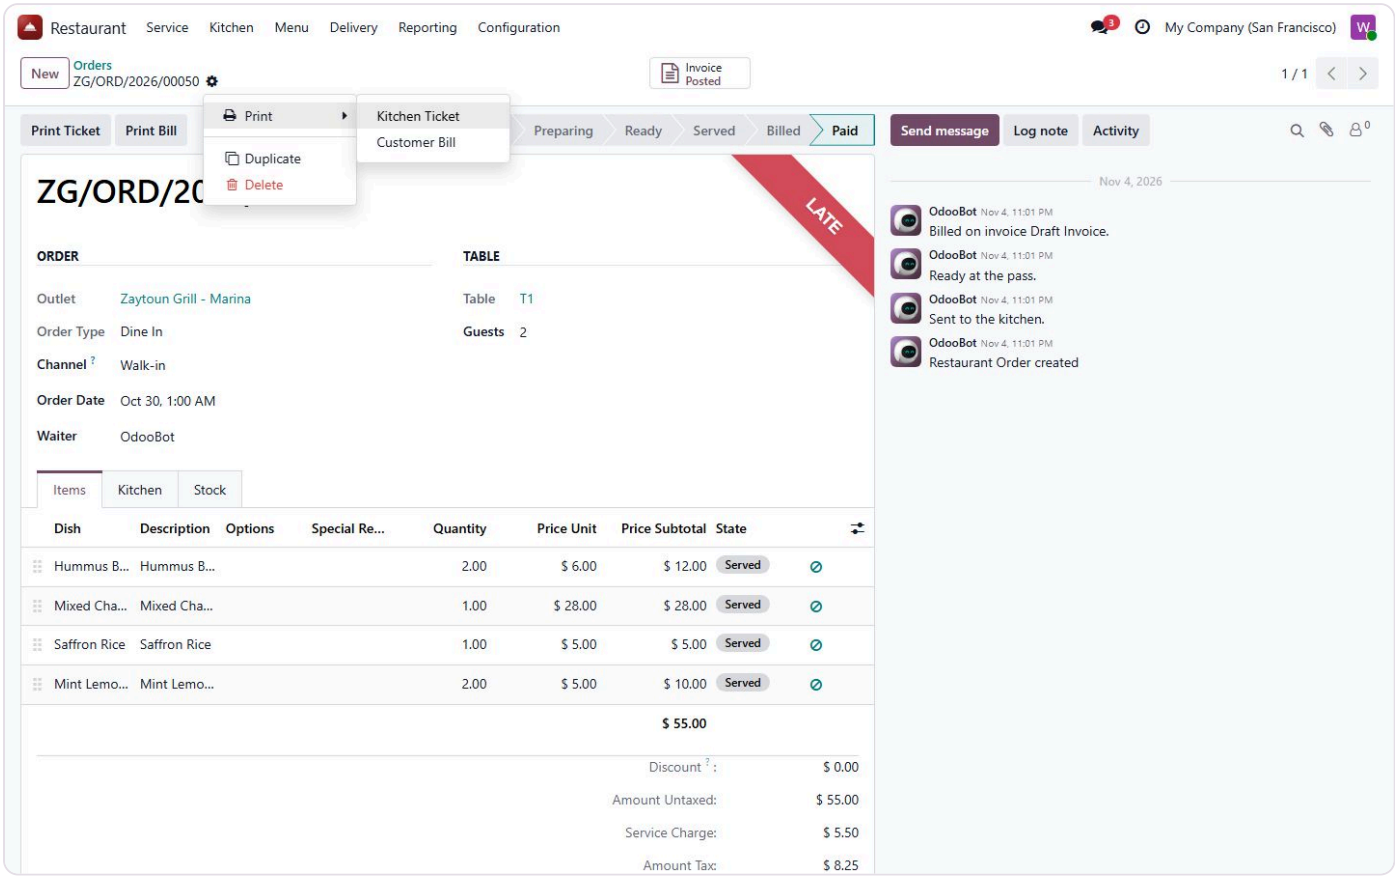

The Print menu on an order: Kitchen Ticket and Customer Bill.

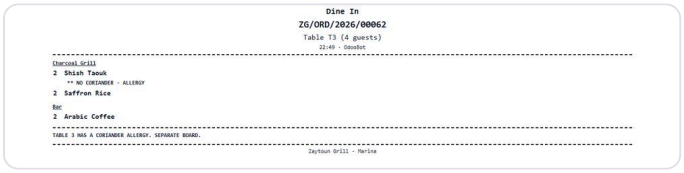


Kitchen Ticket for a dine-in order: table, guests, waiter, the dishes grouped by station, options, line requests and the kitchen note.



Customer Bill: outlet, lines with options, discount, service charge, tax, total, the tip, the ZATCA QR set on this outlet and the receipt footer.



A delivery ticket adds a delivery block with the promised time and the rider.

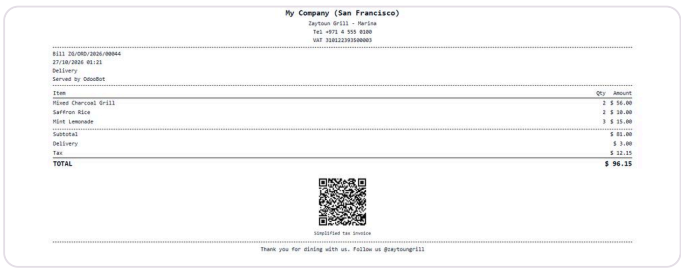

A delivery bill adds the delivery fee.

The paper format is **Restaurant Ticket 80mm**: 80 mm wide, with small margins and a tall page so the content flows. The module does not send the PDF to a printer by itself; print it from the browser to the station's printer, or use a print bridge.

PART 14 A 15-minute demo script

The shortest path through the module that shows what it is for. Follow it on the demo, or use it to show someone else.

MIN	DO THIS	WHAT IT SHOWS
1	Service, Floor Plan	*Which tables are free, eating or waiting to be cleared, and the order on each.*
3	Open table T3, then Open Order	*A dine-in order with its lines at four stations and an allergy note.*
5	Kitchen, Kitchen Display	*The same dishes, one column per station, with Start and Ready.*
7	Orders, open 00065 (delivery)	*Promised time, rider, delivery fee. Then open 00042, a Talabat order with its reference.*
9	Delivery, Riders	*Status, deliveries today and on-time rate per rider.*
10	Menu, Menu Items, Mixed Charcoal Grill	*Recipe, station, prep time, allergens, cooking choice and extras.*
12	Menu, Menu Engineering	*Stars, puzzles and dogs from 90 days of sales.*
13	Orders, 00050, then Invoice	*The bill as a real customer invoice with the service charge line.*
14	Print, Customer Bill	*The 80 mm bill with the fiscal QR.*
15	Reporting, Sales	*Sales by outlet and order type.*

PART 15 Questions people ask, and the limits

The answers come from the module's code, not from the listing.

Questions

QUESTION	ANSWER
Does it need Odoo Enterprise or the Point of Sale?	No. It runs on Odoo 19 Community and needs Inventory and Invoicing, which install with it.
Can guests order from a QR code at the table?	Not with this version alone. Each table has a QR link, but there is no guest ordering page behind it and no QR image is drawn.
Does it connect to Talabat, Deliveroo or Uber Eats?	No. Aggregator orders are typed in with the app's order number so the two can be matched.
Can I run several outlets or brands?	Yes. Each outlet has its own code, service charge, journal, stock location and fiscal block, in one company or one company per outlet.
Does it take stock out automatically?	Yes, the recipe of every dish when the order is sent to the kitchen, if the outlet has a kitchen stock location.
Does Mark Paid record the payment?	It posts the invoice. The payment itself is registered in Invoicing.
Is the ZATCA QR Phase 2?	No. It is the five-tag QR printed on the bill. Phase 2 signing and reporting need a ZATCA integration.
Can a rider have a login?	Yes. Link the rider to a user with the Delivery Rider right and record rules limit them to their own deliveries. Test it first: the right does not read outlets or menu items.
Are there wizards or a setup assistant?	No. Everything is a button on the record it acts on.

Limits worth knowing before you go live

- **No guest ordering page.** The table QR link points to /restaurant/menu, which this module does not provide.
- **No aggregator or delivery app connection.** Orders, menus and prices are not synced with any app, and commission is not recorded.
- **No waitlist and no public booking page.** Bookings are entered by staff.
- **Kitchen display is a back-office board.** No colour by waiting time, no bump screen, no sound, no automatic printing.
- **Modifier limits are not enforced on order lines,** and extras are not taken out of stock.
- **Served Between hours do not block an order.** Use the 86 button.
- **Outlet pricelist is not applied** to order lines, which take the menu price.
- **Mark Paid does not register a payment.**
- **Invoice tax can differ from order tax** when the service charge product is taxed.
- **Units must match.** Recipe units are converted without a warning when they do not belong with the ingredient's unit.
- **Deposit is a note,** not an accounting entry.
- **Single currency per company:** orders are in the company currency.

PART 16 Menu map

Every menu and document the module adds, on one page.

Service

Orders	Every dine-in, takeaway, delivery and aggregator order. Opens on the open ones
Floor Plan	Tables by floor, coloured free, reserved, occupied or needs cleaning
Reservations	Table bookings in a calendar, with no-show release

Kitchen

Kitchen Display	Every dish still cooking, in one column per station
Wastage	Spoiled, dropped or remade food, priced and scrapped from stock

Menu

Menu Items	Dishes with price, recipe, cost, station, diet and allergens
Menu Engineering	Stars, plough horses, puzzles and dogs (manager)
Categories	Menu sections, each tied to a course (manager)
Modifier Groups	Cooking choices and paid extras with min and max (manager)
Allergens	The fourteen declarable allergens, with short codes (manager)

Delivery

Riders	Riders, their vehicle, status, deliveries today and on-time rate

Reporting

Sales	Billed and paid orders by outlet, type, channel, waiter, date (manager)
Dishes	Billed and paid dishes by category, station or course (manager)

Configuration

Settings	Service charge, bill when served, no-show grace, food cost target
Outlets	Restaurants, cloud kitchens, counters and trucks, with billing and stock
Floors	Dining areas per outlet, with seat counts
Kitchen Stations	Where each dish is cooked, plus the pass

Behind the scenes

Kitchen Ticket and Customer Bill	Two 80 mm reports printed from an order
Email template	"Restaurant: Reservation Confirmed"
Scheduled actions	No-show release every 15 minutes, menu engineering daily
Sequences	Orders ORD/, bookings RES/, wastage WST/

Want this for your restaurant or kitchen?

We set up your outlets, floors and stations, load your menu with recipes priced from your real purchase costs, connect the bills to your accounts and tax, and train the floor, the kitchen and the riders. The same module runs a single cafe, a dark kitchen with several brands, or a group of outlets in one database.

way4tech.com · info@way4tech.com